

Physics 101: Lecture 15

Rolling Objects

Today's lecture will cover Textbook Chapter 8.5-8.7



Overview

- Review

- $K_{\text{rotation}} = \frac{1}{2} I \omega^2$

- Torque = Force that causes rotation

- $\tau = F r \sin \theta$

- Equilibrium

- $F_{\text{Net}} = 0$

- $\tau_{\text{Net}} = 0$

- Today

- $\tau_{\text{Net}} = I \alpha$ (rotational $F = ma$)

- Energy conservation revisited

Linear and Angular

	Linear	Angular
Displacement	x	θ
Velocity	v	ω
Acceleration	a	α
Inertia	m	I
KE	$\frac{1}{2} m v^2$	$\frac{1}{2} I \omega^2$
N2L	$F=ma$	$\tau = I\alpha$
Momentum	$p = mv$	$L = I\omega$

Today 

Rotational Form Newton's 2nd Law

- $\tau_{\text{Net}} = I \alpha$

- Torque is amount of twist provide by a force

- » Signs: positive = CCW



- Moment of Inertia like mass. Large I means hard to start or stop from spinning.


- Problems Solved Like Newton's 2nd

- Draw FBD

- Write Newton's 2nd Law

Falling weight & pulley

- A mass m is hung by a string that is wrapped around a pulley of radius R attached to a heavy flywheel. The moment of inertia of the pulley + flywheel is I . The string does not slip on the pulley. Starting at rest, how long does it take for the mass to fall a distance L .

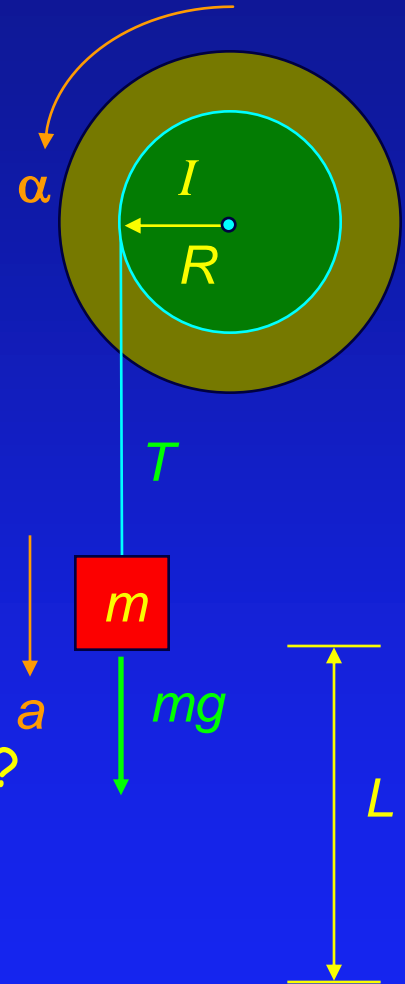

What method should we use to solve this problem?

A) Conservation of Energy (including rotational)

B) $\tau_{\text{Net}} = I\alpha$ and then use kinematics

Since it asks for time, we will use B.

Falling weight & pulley...

- For the hanging mass use $F_{\text{Net}} = ma$

$$\rightarrow mg - T = ma$$

- For the flywheel use $\tau_{\text{Net}} = I\alpha$


$$\rightarrow TR \sin(90) = I\alpha$$

- Realize that $a = \alpha R$

$$\rightarrow TR = I \frac{a}{R}$$

- Now solve for a , eliminate T :

$$a = \left(\frac{mR^2}{mR^2 + I} \right) g$$

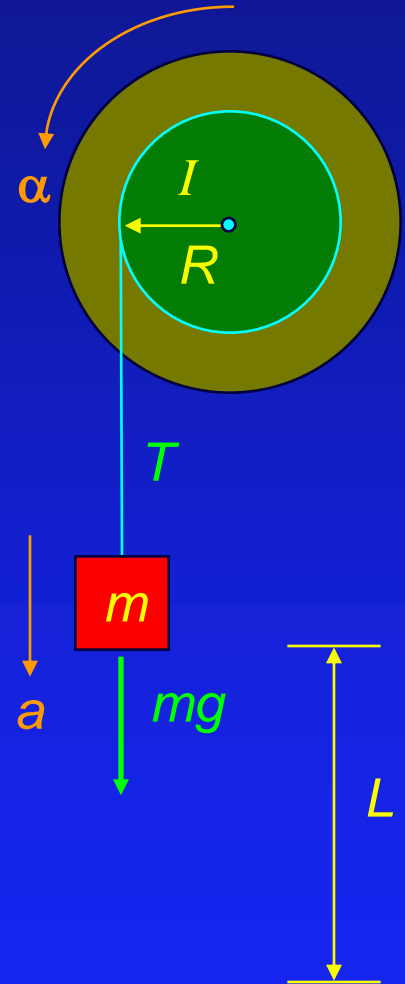


Falling weight & pulley...

- Using 1-D kinematics we can solve for the time required for the weight to fall a distance L :

$$y = y_0 + v_0 t + \frac{1}{2} a t^2$$

$$L = \frac{1}{2} a t^2 \quad \rightarrow \quad t = \sqrt{\frac{2L}{a}}$$

$$\text{where } a = \left(\frac{mR^2}{mR^2 + I} \right) g$$

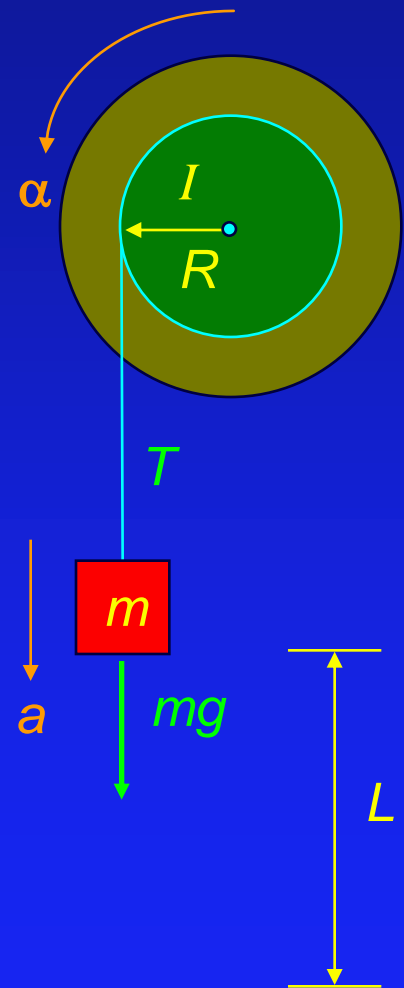


Torque ACT

- Which pulley will make it drop fastest?
 - 1) Small pulley
 - 2) Large pulley
 - 3) Same



Tension...

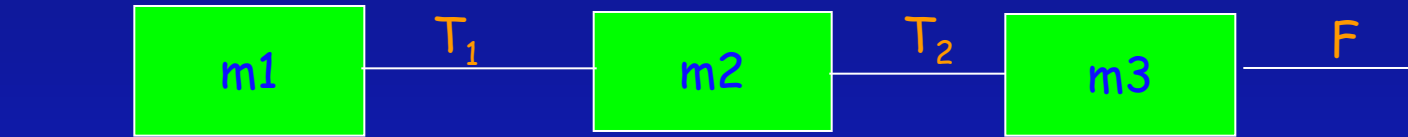

Compare the tensions T_1 and T_2 as the blocks are accelerated to the right by the force F .

A) $T_1 < T_2$

B) $T_1 = T_2$


C) $T_1 > T_2$

Compare the tensions T_1 and T_2 as block 3 falls

A) $T_1 < T_2$

B) $T_1 = T_2$

C) $T_1 > T_2$

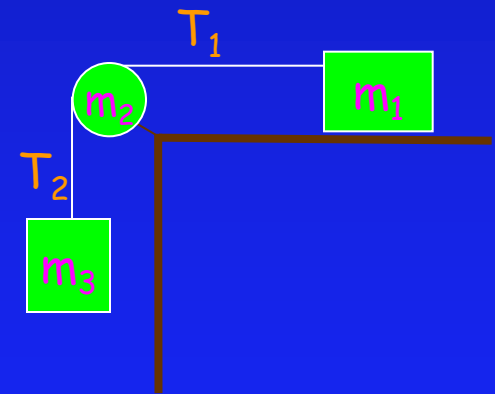


Rolling

A wheel is spinning clockwise such that the speed of the outer rim is 2 m/s.

What is the velocity of the top of the wheel relative to the ground? $+2 \text{ m/s}$

What is the velocity of the bottom of the wheel relative to the ground? -2 m/s

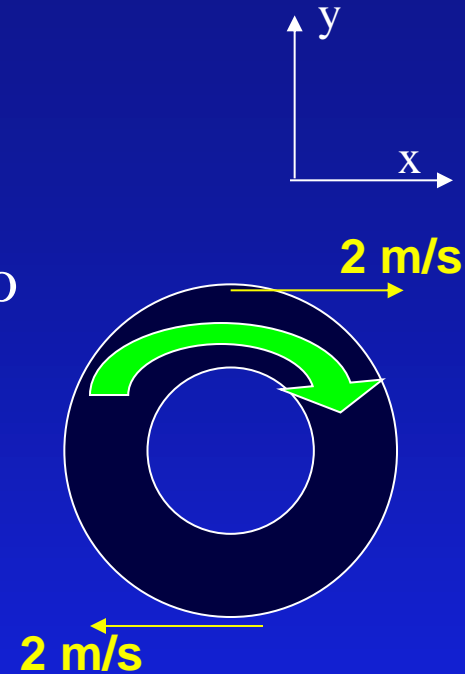

You now carry the spinning wheel to the right at 2 m/s.

What is the velocity of the top of the wheel relative to the ground?


A) -4 m/s B) -2 m/s C) 0 m/s D) $+2 \text{ m/s}$ E) $+4 \text{ m/s}$

What is the velocity of the bottom of the wheel relative to the ground?

A) -4 m/s B) -2 m/s C) 0 m/s D) $+2 \text{ m/s}$ E) $+4 \text{ m/s}$

Rolling

- An object with mass M , radius R , and moment of inertia I rolls without slipping down a plane inclined at an angle θ with respect to horizontal. What is its acceleration?
- Consider CM motion and rotation about the CM separately when solving this problem

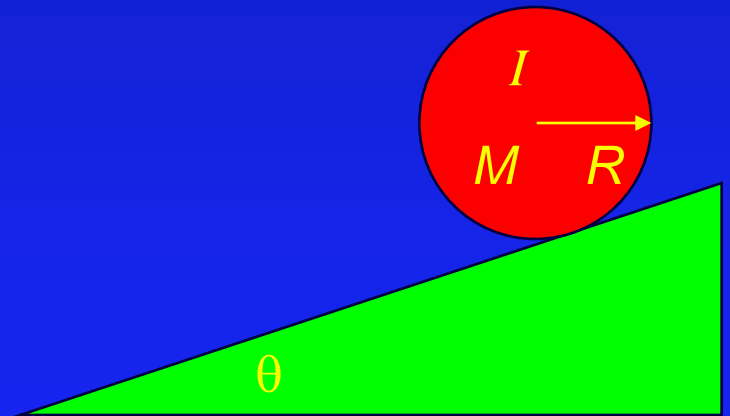

Rolling...


- Static friction f causes rolling. It is an unknown, so we must solve for it.
- First consider the free body diagram of the object and use $F_{NET} = Ma_{cm}$:

In the x direction $Mg \sin \theta - f = Ma_{cm}$

- Now consider rotation about the CM and use $\tau_{NET} = I\alpha$ realizing that

$$\tau = Rf \quad \text{and} \quad a = \alpha R$$

$$Rf = I \frac{a}{R} \quad \rightarrow \quad f = I \frac{a}{R^2}$$

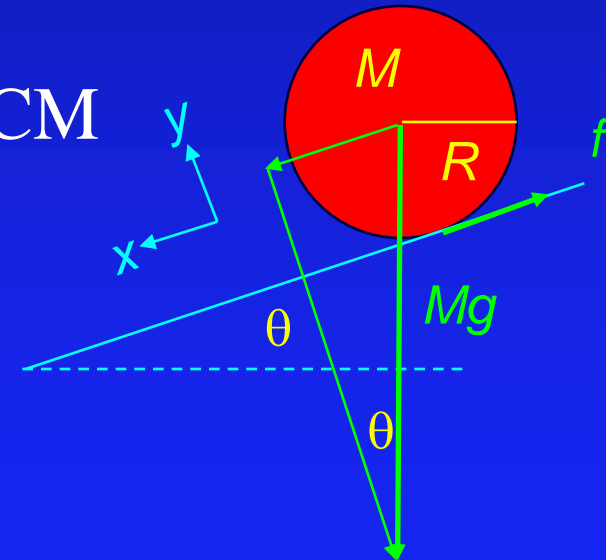

Rolling...

- We have two equations:

$$Mg \sin \theta - f = Ma$$


$$f = I \frac{a}{R^2}$$

- We can combine these to eliminate f :

$$a = g \left(\frac{MR^2 \sin \theta}{MR^2 + I} \right)$$

For a sphere:

$$a = g \left(\frac{MR^2 \sin \theta}{MR^2 + \frac{2}{5}MR^2} \right) = \frac{5}{7} g \sin \theta$$

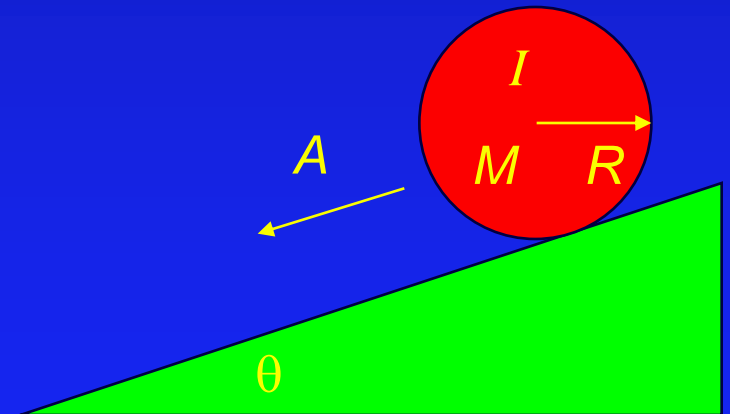

Energy Conservation!

- Friction causes object to roll, but if it rolls w/o slipping friction does NO work!
 - $W = F d \cos \theta$ d is zero for point in contact
- No dissipated work, energy is conserved
- Need to include both translational and rotational kinetic energy.
 - $K = \frac{1}{2} m v^2 + \frac{1}{2} I \omega^2$

Translational + Rotational KE

- Consider a cylinder with radius R and mass M , rolling w/o slipping down a ramp. Determine the ratio of the translational to rotational KE.

Translational: $K_T = \frac{1}{2} M v^2$


Rotational: $K_R = \frac{1}{2} I \omega^2$

use $I = \frac{1}{2} M R^2$ and $\omega = \frac{v}{R}$

Rotational: $K_R = \frac{1}{2} (\frac{1}{2} M R^2) (v/R)^2$


$$= \frac{1}{4} M v^2$$

$$= \frac{1}{2} K_T$$

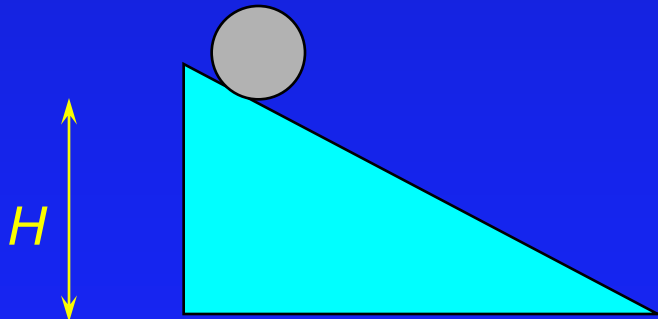

Rolling Act

- Two uniform cylinders are machined out of solid aluminum. One has twice the radius of the other.
 - If both are placed at the top of the same ramp and released, which is moving faster at the bottom?
 - (a) bigger one
 - (b) smaller one
 - (c) same

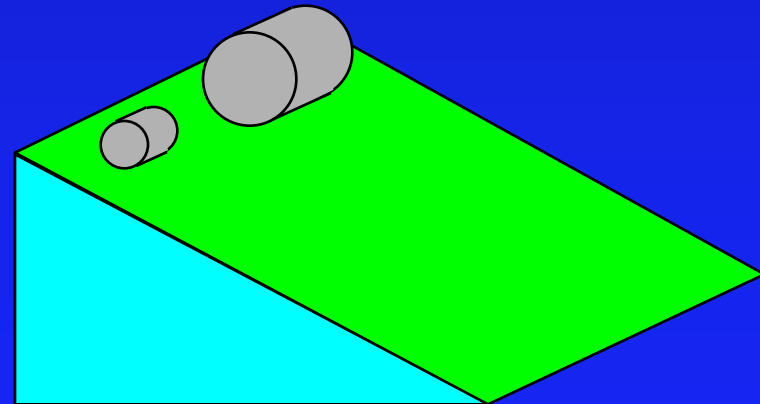

Summary

- $\tau = I \alpha$
- Energy is Conserved
 - ➔ Need to include translational and rotational