

# CS 439wn: Wireless Networking

Physical Layer

# Wireless Physical Layer

---

- ▶ RF introduction
  - ▶ Time versus frequency view
  - ▶ A cartoon view
- ▶ Modulation and multiplexing
- ▶ Channel capacity
- ▶ Antennas and signal propagation
- ▶ Equalization and diversity
- ▶ Modulation and coding
- ▶ Spectrum access



# Wireless Networks Builds on ...

---

## ▶ General networking

- ▶ Internet architecture: who is responsible for what?
- ▶ How is it affected by wireless links or congestion in wireless multi-hop networks?
- ▶ How is it affected by mobility?
- ▶ How about variable link properties and intermittent connectivity?


## ▶ Wireless communications

- ▶ How does signal environment affect performance of a wireless link?
- ▶ What wireless communication challenges can be hidden from higher layer protocols?



# RF Introduction

- ▶ RF = Radio Frequency
  - ▶ Electromagnetic signal that propagates through “ether”
  - ▶ Ranges 3 KHz .. 300 GHz
  - ▶ Or 100 km .. 0.1 cm (wavelength)

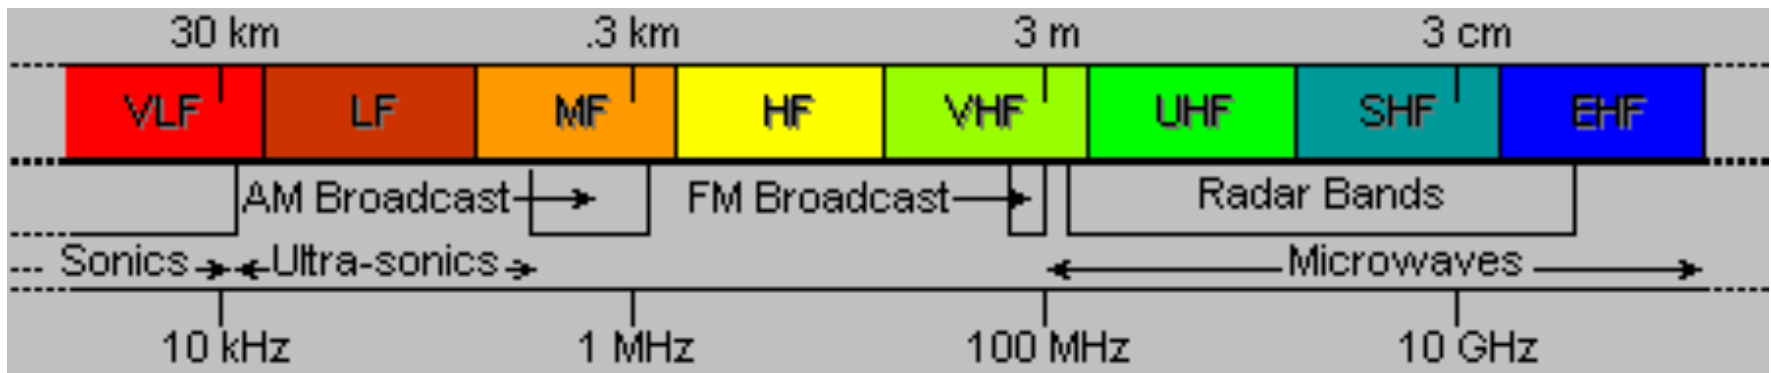


- ▶ Travels at the speed of light
- ▶ Can take both a time and a frequency view

# Cartoon View 1 – Energy Wave

---


- ▶ Think of it as energy that radiates from one antenna and is picked up by another antenna
  - ▶ Helps explain properties such as attenuation
  - ▶ Density of the energy reduces over time and with distance
- ▶ Useful when studying attenuation
  - ▶ Receiving antennas catch less energy with distance
  - ▶ Notion of cellular infrastructure

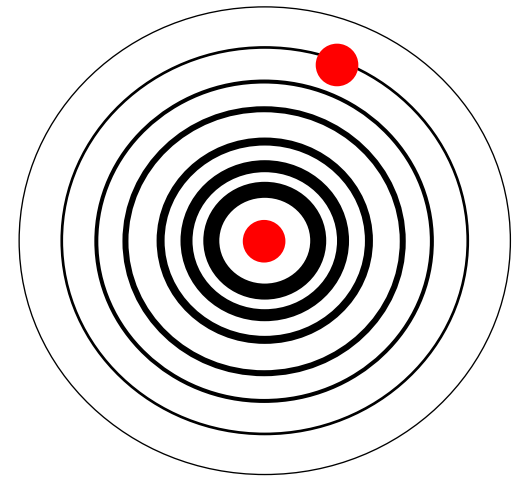


## Cartoon View 2 – Rays of Energy

---

- ▶ Can also view it as a “ray” that propagates between two points
  - ▶ Rays can be reflected etc.
  - ▶ Can provide connectivity without line of sight
- ▶ A channel can also include multiple “rays” that take different paths
  - ▶ Known as multipath

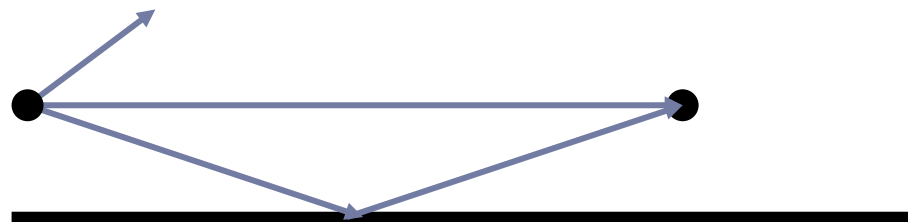

# But how can two hosts communicate?

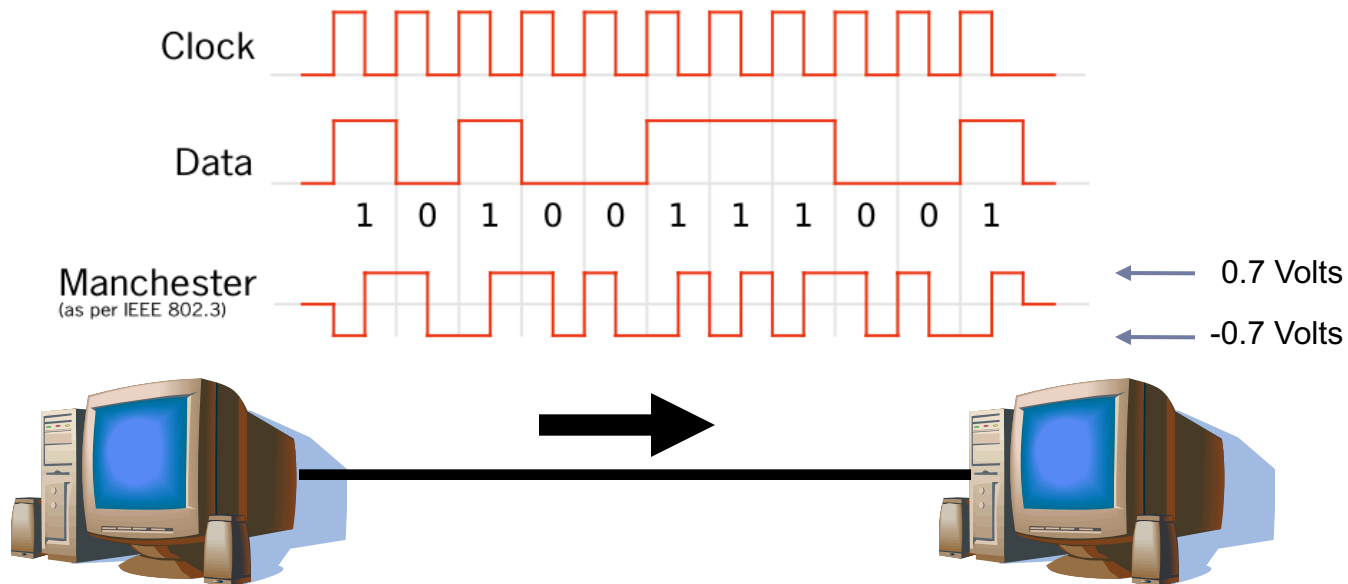

- ▶ Encode information on modulated “Carrier signal”
  - ▶ Phase, frequency, and/or amplitude modulation

# Analog vs. Digital Transmission

---

- ▶ **Analog** and **digital** correspond roughly to **continuous** and **discrete**
- ▶ Data: entities that convey meaning
  - ▶ **Analog**: continuously varying patterns of intensity (e.g., voice and video)
  - ▶ **Digital**: discrete values (e.g., integers, ASCII text)
- ▶ Signals: electric or electromagnetic encoding of data
  - ▶ **Analog**: continuously varying electromagnetic wave
  - ▶ **Digital**: sequence of voltage pulses





# Time Domain View:

## Periodic versus Aperiodic Signals

---

### ► Periodic signal

- Analog or digital signal pattern that repeats over time

$$s(t + T) = s(t)$$

where  $T$  is the period of the signal

- Allows us to take a frequency view

### ► Aperiodic signal

- Analog or digital signal pattern that doesn't repeat over time
- Can “make” an aperiodic signal periodic by taking a slice  $T$  and repeating it
- Often what we do implicitly




# Key Parameters of a (Periodic) Signal

---

- ▶ **Peak amplitude ( $A$ )**
  - ▶ Maximum value or strength of the signal over time
  - ▶ Typically measured in volts
- ▶ **Frequency ( $f$ )**
  - ▶ Rate, in cycles per second, or Hertz (Hz) at which the signal repeats
- ▶ **Period ( $T$ )**
  - ▶ Amount of time it takes for one repetition of the signal
  - ▶  $T = 1/f$
- ▶ **Phase ( $\phi$ )**
  - ▶ Measure of the relative position in time within a single period of a signal
- ▶ **Wavelength ( $\lambda$ )**
  - ▶ Distance occupied by a single cycle of the signal
  - ▶ Or, the distance between two points of corresponding phase of two consecutive cycles

# Sine Wave Parameters

- ▶ General sine wave
  - ▶  $s(t) = A \sin(2\pi ft + \phi)$
- ▶ Effect of parameters
  - ▶  $A = 1, f = 1 \text{ Hz},$   
 $\phi = 0$ ; thus  $T = 1 \text{ s}$

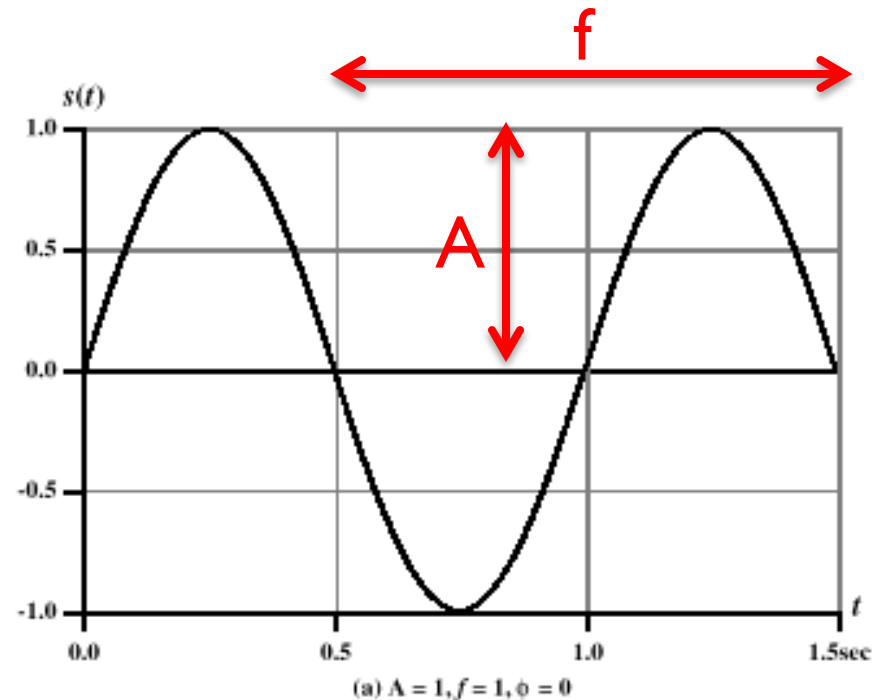

- ▶ note:  $2\pi \text{ radians} = 360^\circ = 1 \text{ period}$

# Sine Wave Parameters


## ► General sine wave

### ► If x-axis = time

- $y$ -axis = value of a signal at a given point in *space*

### ► If x-axis = space


- $y$ -axis = value of a signal at a given point in *time*

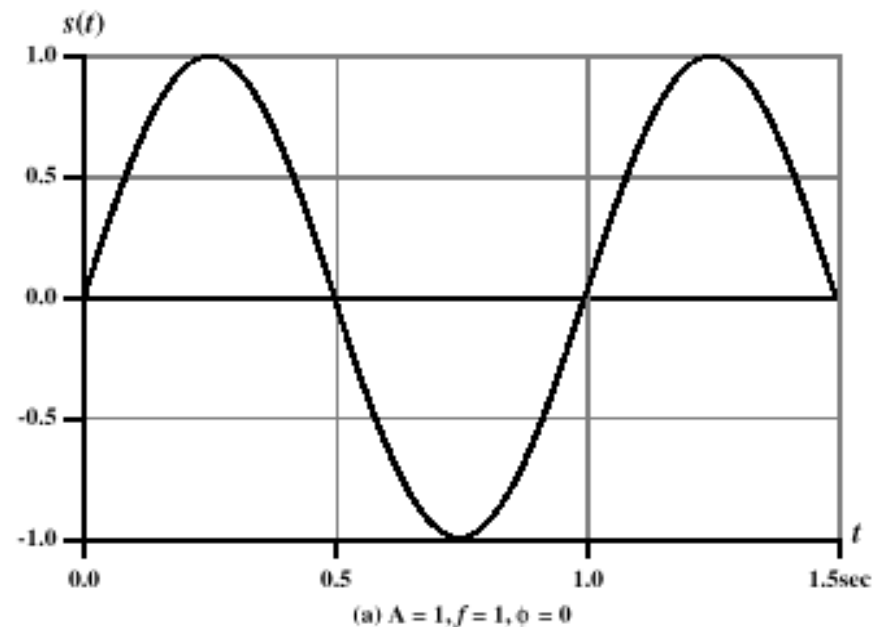

- note:  $2\pi$  radians =  $360^\circ = 1$  period

# Sine Wave Parameters


- ▶ General sine wave
  - ▶  $s(t) = A \sin(2\pi ft + \phi)$
- ▶ Effect of parameters
  - ▶ Reduced peak amplitude;  $A=0.5$

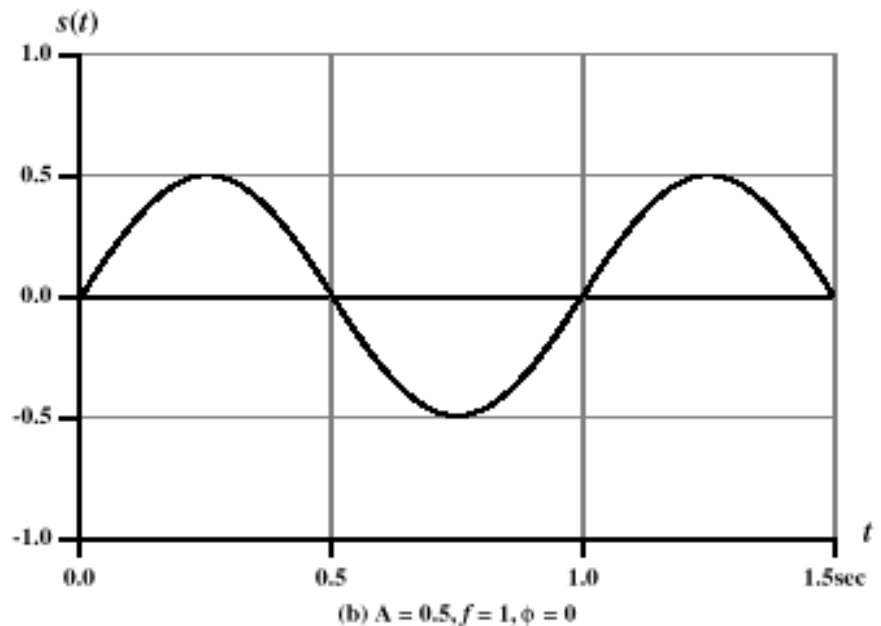

- ▶ note:  $2\pi \text{ radians} = 360^\circ = 1 \text{ period}$

# Sine Wave Parameters


- ▶ General sine wave
  - ▶  $s(t) = A \sin(2\pi ft + \phi)$
- ▶ Effect of parameters
  - ▶ Increased frequency;  
 $f = 2$ , thus  $T = 1/2$

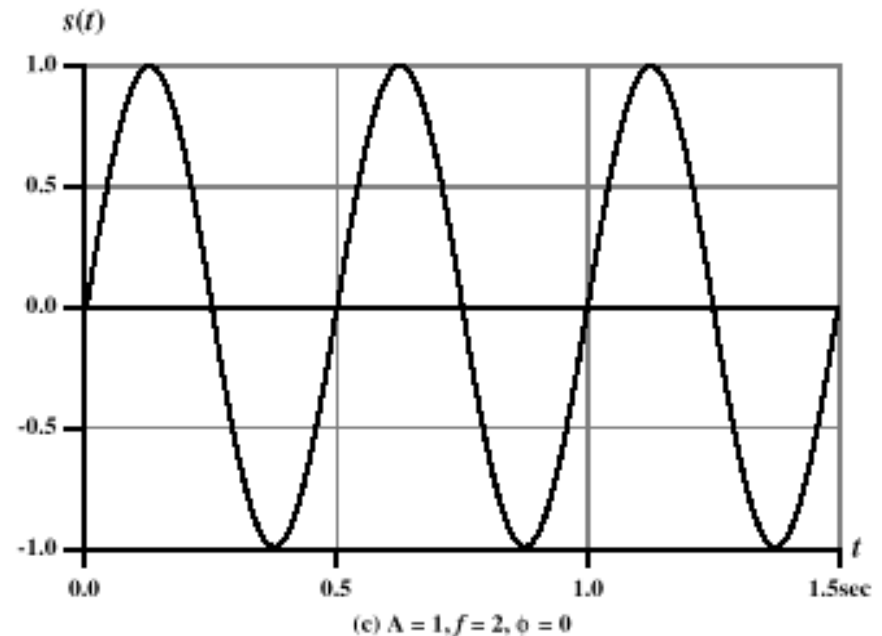

- ▶ note:  $2\pi \text{ radians} = 360^\circ = 1 \text{ period}$

# Sine Wave Parameters




- ▶ General sine wave
  - ▶  $s(t) = A \sin(2\pi ft + \phi)$
- ▶ Effect of parameters
  - ▶ Phase shift  
 $\phi = \pi/4$  radians  
(45 degrees)

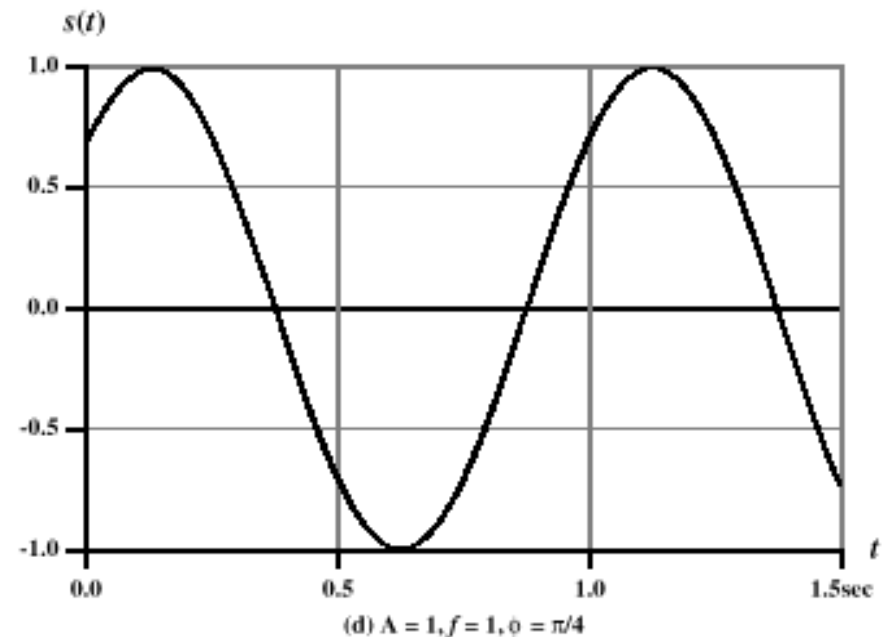

- ▶ note:  $2\pi$  radians =  $360^\circ = 1$  period

# Signal Modulation

- ▶ **Amplitude modulation (AM)**
  - ▶ Change the strength of the signal
  - ▶ High values -> stronger signal
- ▶ **Frequency modulation (FM)**
  - ▶ Change the frequency of the signal
- ▶ **Phase modulation (PM)**
  - ▶ Change the phase of the signal

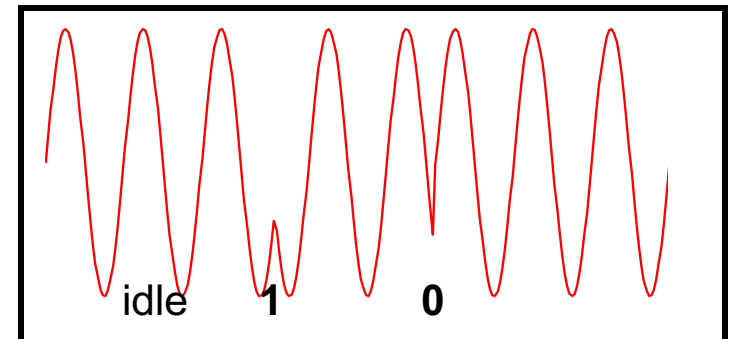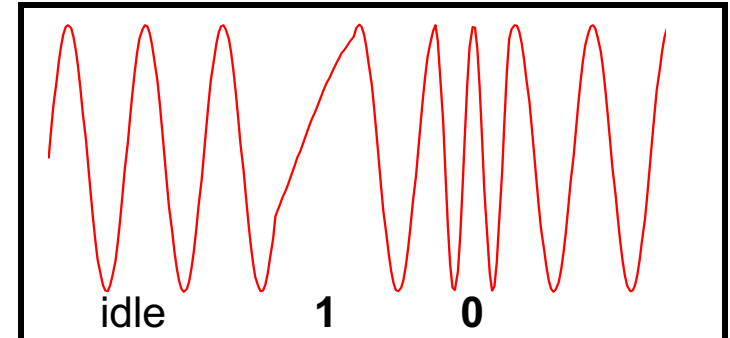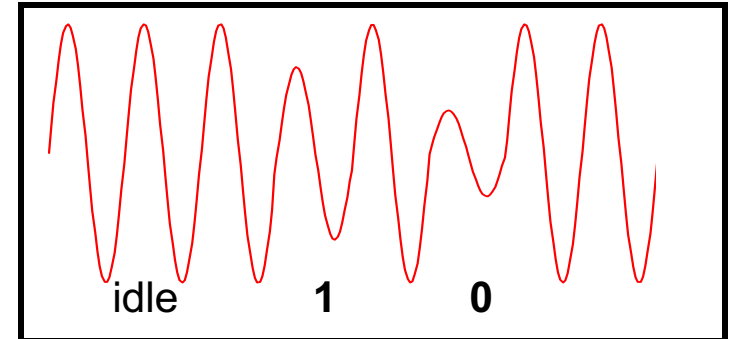




# Frequency-Domain Concepts

---

- ▶ **Electromagnetic signal**
  - ▶ A collection of periodic analog signals (sine waves) at different amplitudes, frequencies, and phases
- ▶ **The period of the total signal is equal to the period of the fundamental frequency**
  - ▶ All other frequencies are an integer multiple of the fundamental frequency
- ▶ **Strong relationship between the “shape” of the signal in the time and frequency domain**

# Frequency-Domain Concepts


- ▶ A (periodic) signal
  - ▶ A sum of sine waves of different strengths
  - ▶ Example:  $f$  and  $3f$ 
    - ▶ Note that  $3f$  is an integer multiple of  $f$
- ▶ Fundamental frequency
  - ▶ All frequency components are integer multiples of one frequency

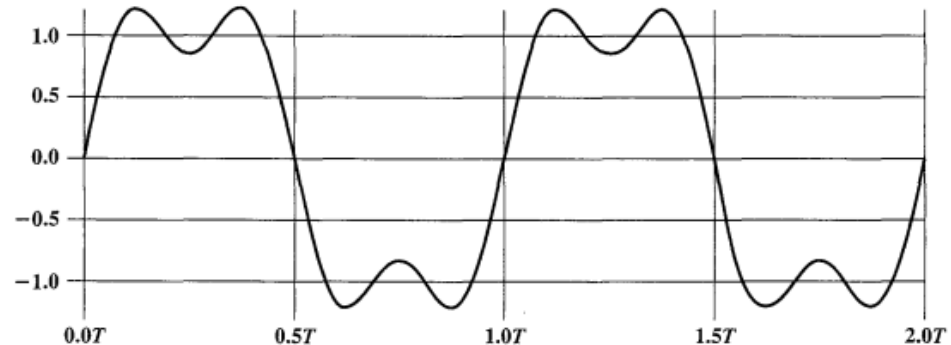

$$(4/\pi)[\sin 2\pi ft] + (1/3)\sin(2\pi 3ft)]$$

# Frequency-Domain Concepts

- ▶ A (periodic) signal
  - ▶ A sum of sine waves of different strengths
  - ▶ Example:  $f$  and  $3f$ 
    - ▶ Note that  $3f$  is an integer multiple of  $f$
- ▶ Fundamental frequency
  - ▶ Period of the signal = the period of the fundamental frequency

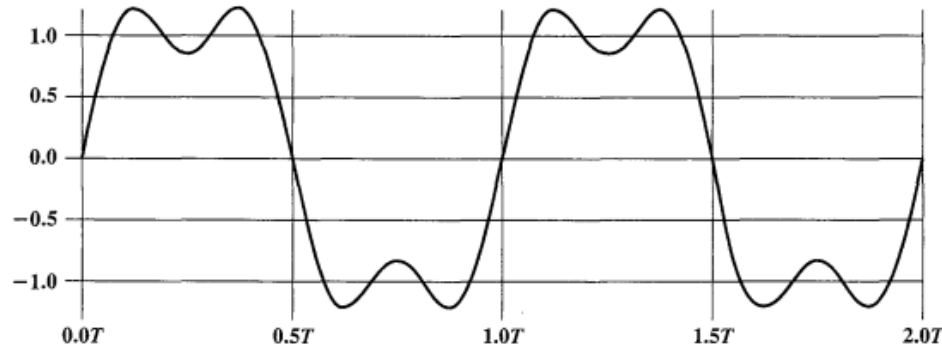

$$(4/\pi)[\sin 2\pi ft] + (1/3)\sin(2\pi 3ft)]$$

# Frequency-Domain Concepts

- ▶ **Spectrum**


- ▶ Range of frequencies
- ▶ From  $f$  to  $3f$

- ▶ **Absolute bandwidth**

- ▶ Width of the spectrum
- ▶  $3f - f = 2f$

- ▶ **Effective bandwidth**

- ▶ Narrow band of frequencies that most of the signal's energy is contained in

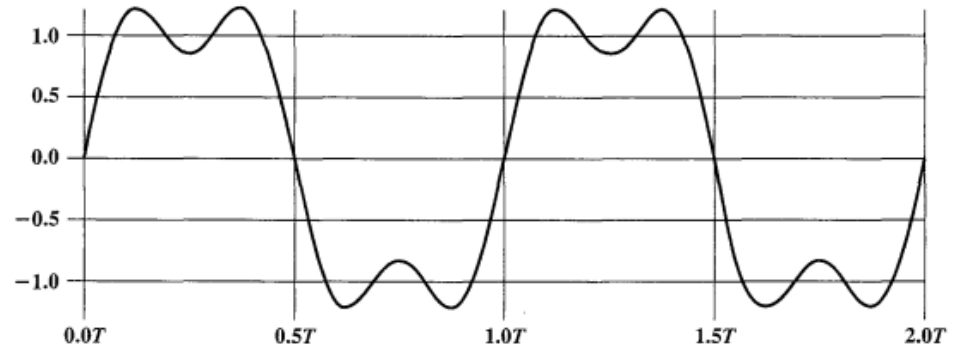

$$(4/\pi)[\sin 2\pi ft] + (1/3)\sin(2\pi 3ft)]$$




# Relationship between Data Rate and Bandwidth

---

- ▶ **Bandwidth translates to bits**
  - ▶ The greater the (spectral) bandwidth, the higher the information-carrying capacity of the signal (data bandwidth)
  - ▶ Intuition: if a signal can change faster, it can be modulated in a more detailed way and can carry more data
- ▶ **Extreme example**
  - ▶ A signal that only changes once a second will not be able to carry a lot of bits or convey a very interesting TV channel




# Signals to bits

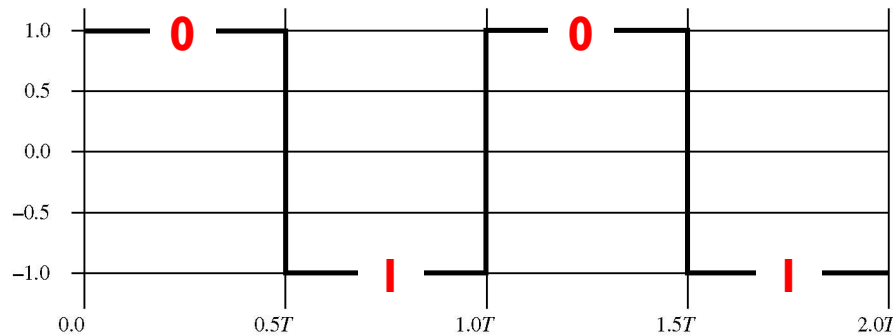

- ▶ Each pulse lasts  $1/2f$
- ▶ Data rate =  $2f$  bps

What are the frequency components of the signal?

# Signals to bits

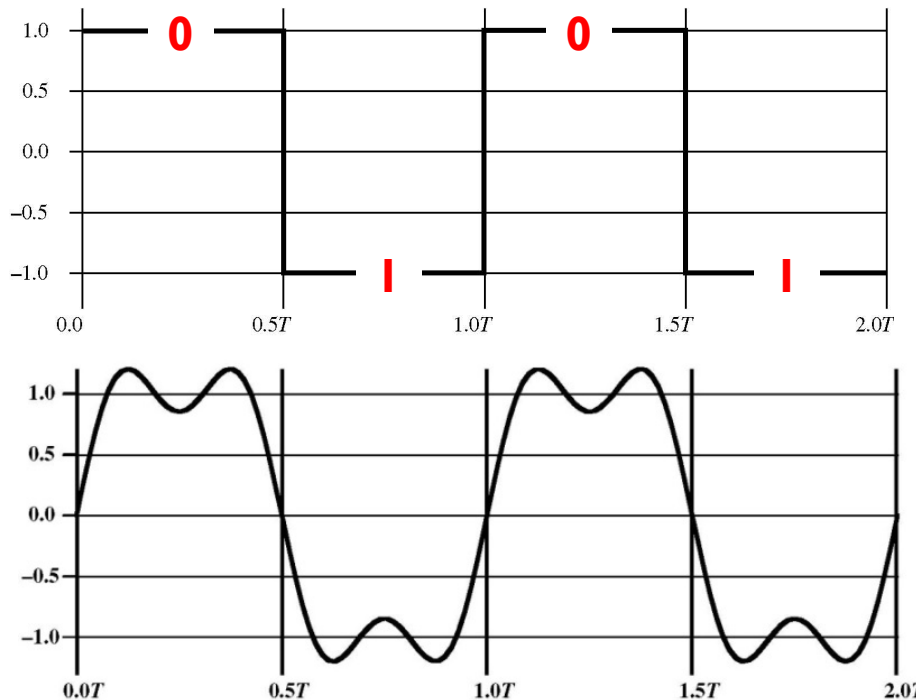


► Each pulse lasts  $1/2f$

► Data rate =  $2f$  bps

► Add two sine waves

$$(4/\pi)[\sin 2\pi ft] + (1/3)\sin(2\pi 3ft)]$$


# Signals to bits

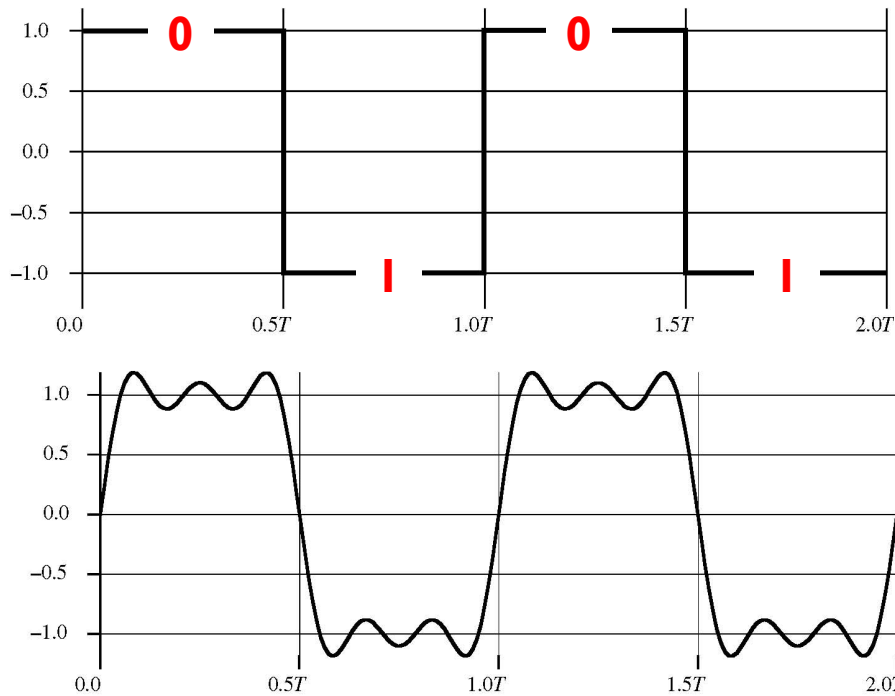

- ▶ Each pulse lasts  $1/2f$ 
  - ▶ Data rate =  $2f$  bps
- ▶ Add a sine wave with frequency  $5f$



# Signals to bits

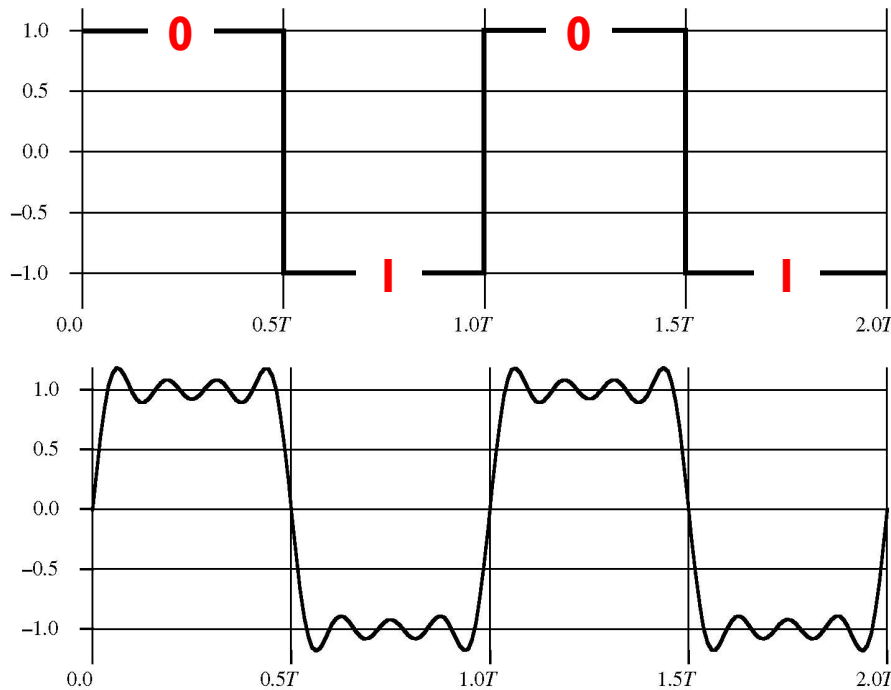

► Each pulse lasts  $1/2f$

► Data rate =  $2f$  bps


► Add a sine wave with frequency  $7f$

► And so on ...

Infinite frequencies = infinite bandwidth!

not quite ...


# Data rate

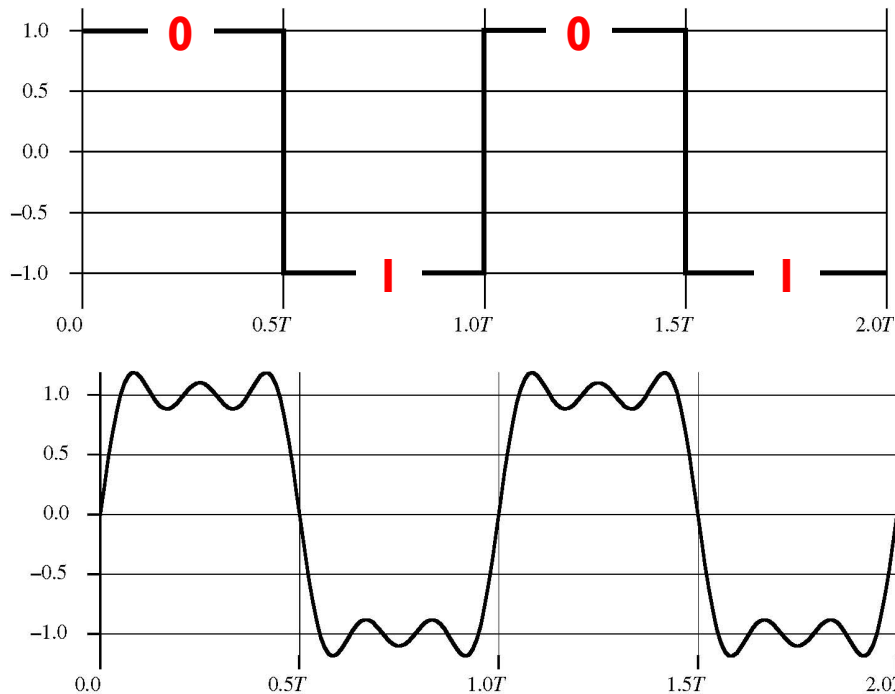

Close enough to square wave to distinguish 0 and 1

- ▶ Available bandwidth of bandwidth of 4MHz
- ▶ If  $f = 10^6$  cycles/sec = 1MHz
  - ▶ Signal bandwidth = 4MHz
  - ▶  $T = 1$  bit/0.5  $\mu$ sec
  - ▶ Data rate = 2 Mbps

# Data rate

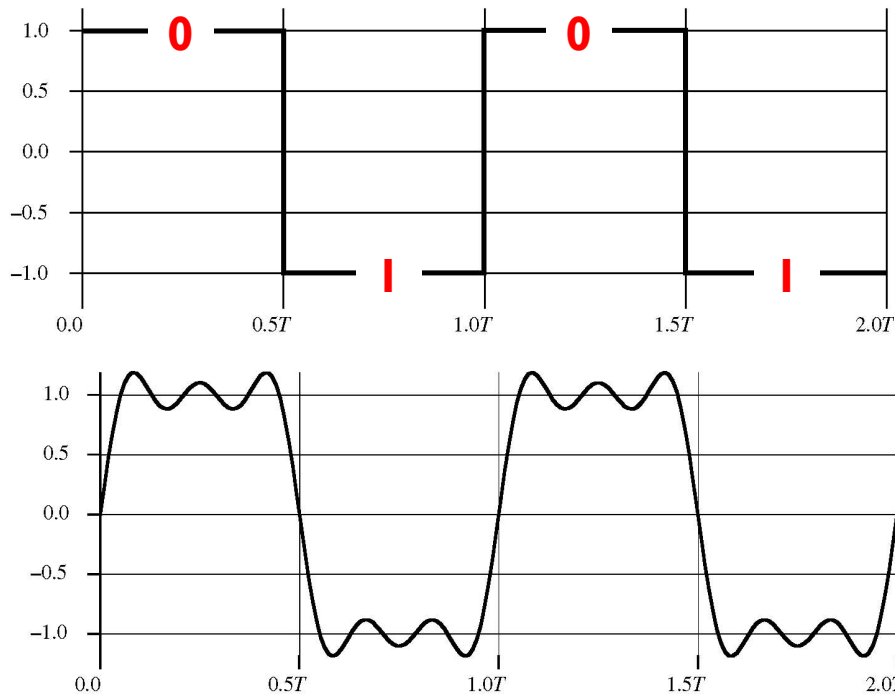

Close enough to square wave to distinguish 0 and 1


► Available bandwidth of bandwidth of 8MHz

► If  $f = 2\text{MHz}$

- Signal bandwidth = 8MHz
- $T = 1 \text{ bit}/0.25 \mu\text{sec}$
- Data rate = 4 Mbps

**2X BW = 2X data rate**

# Data rate

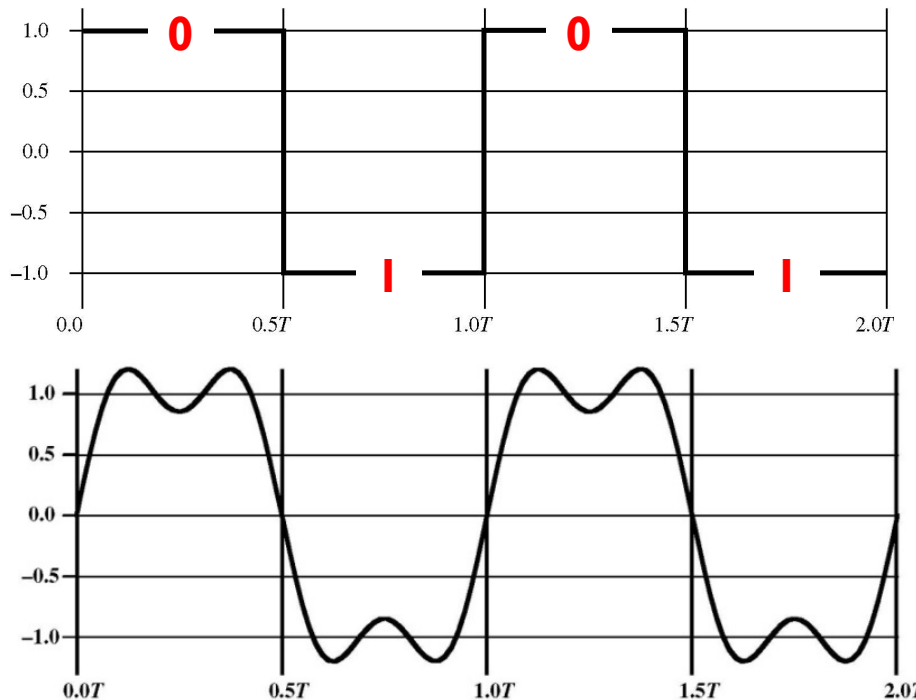

What if this is good enough?

► Available bandwidth of bandwidth of 4MHz

► If  $f = 2\text{MHz}$

- Signal bandwidth = 4MHz
- $T = 1 \text{ bit}/0.25 \mu\text{sec}$
- Data rate = 4 Mbps

IF the receiver can distinguish between 0 and 1!

# Signals: Back to Analog and Digital

## ▶ Goal



- ▶ Sender changes the signal, e.g. the amplitude, in a way that the receiver can recognize

## ▶ Analog: a continuously varying electromagnetic wave that may be propagated over a variety of media, depending on frequency

- ▶ Wired: Twisted pair, coaxial cable, fiber
- ▶ Wireless: Atmosphere or space propagation
- ▶ Cannot recover from distortions, noise

## ▶ Digital: discrete changes in the signal that correspond to a digital signal

- ▶ Less susceptible to noise but can suffer from attenuation
- ▶ Can regenerate signal along the path (repeater versus amplifier)

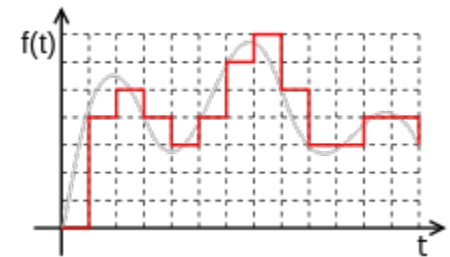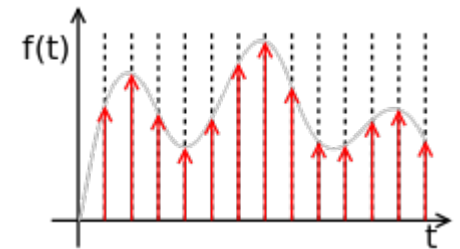

# Channel Capacity


---

- ▶ **Data rate**
  - ▶ Rate at which data can be communicated (bps)
- ▶ **Channel Capacity**
  - ▶ Maximum rate at which data can be transmitted over a given channel, under given conditions
- ▶ **Bandwidth**
  - ▶ Bandwidth of the transmitted signal as constrained by the transmitter and the nature of the transmission medium (Hertz)
- ▶ **Noise**
  - ▶ Average level of noise over the communications path
- ▶ **Error rate**
  - ▶ Rate at which errors occur
  - ▶ Error = transmit 1 and receive 0; transmit 0 and receive 1



# Sampling


---

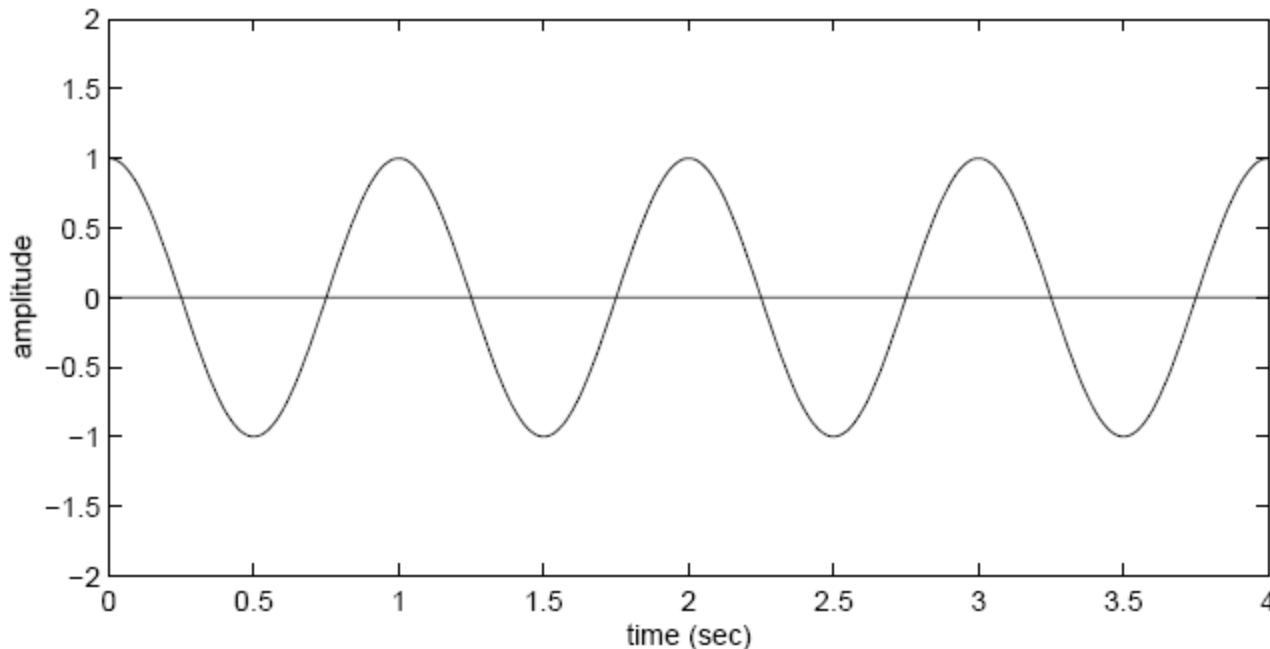

- ▶ Suppose you have the following 1 Hz signal being received
- ▶ How fast do you need to sample, to capture the signal?

# Sampling


---

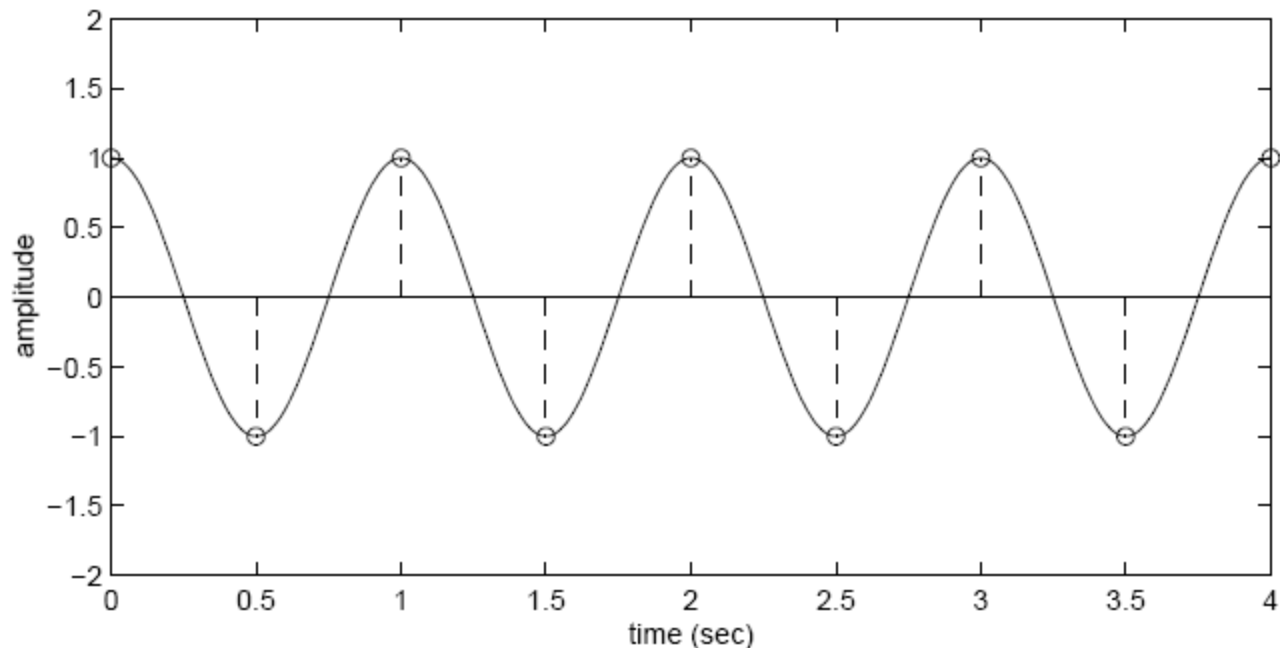

- ▶ Sampling a 1 Hz signal at 2 Hz is enough
  - ▶ Captures every peak and trough




# Sampling

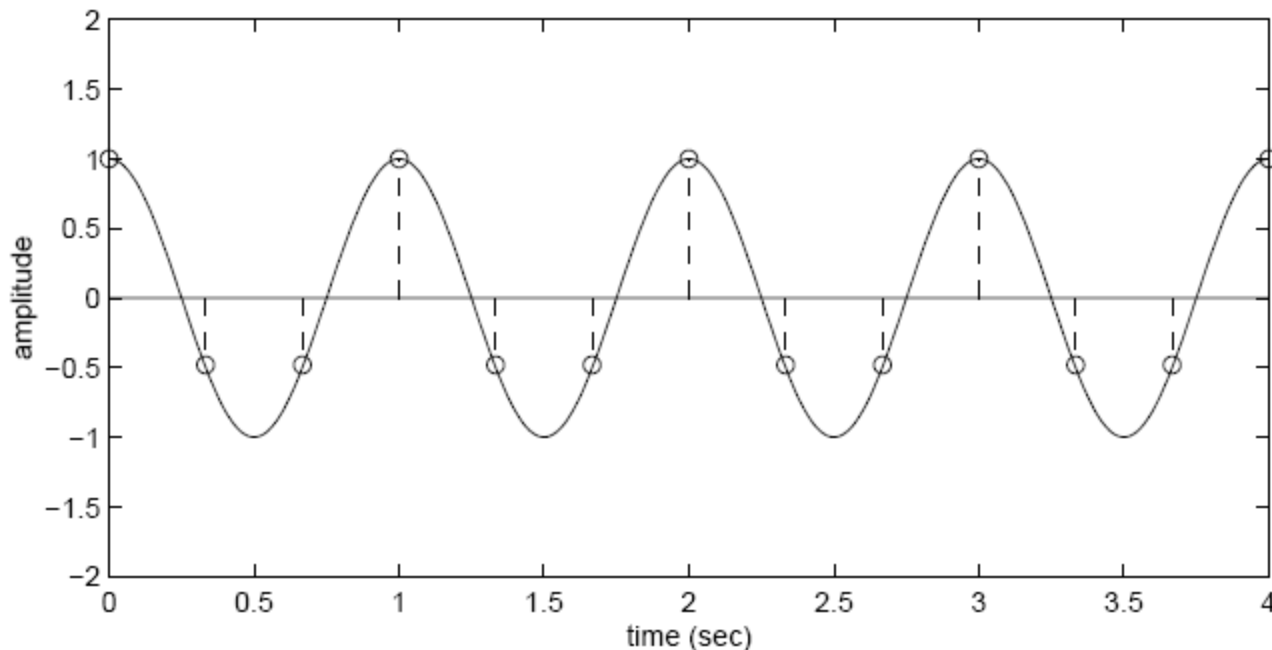

- ▶ Sampling a 1 Hz signal at 3 Hz is also enough
  - ▶ In fact, more than enough samples to capture variation in signal


# Sampling

---

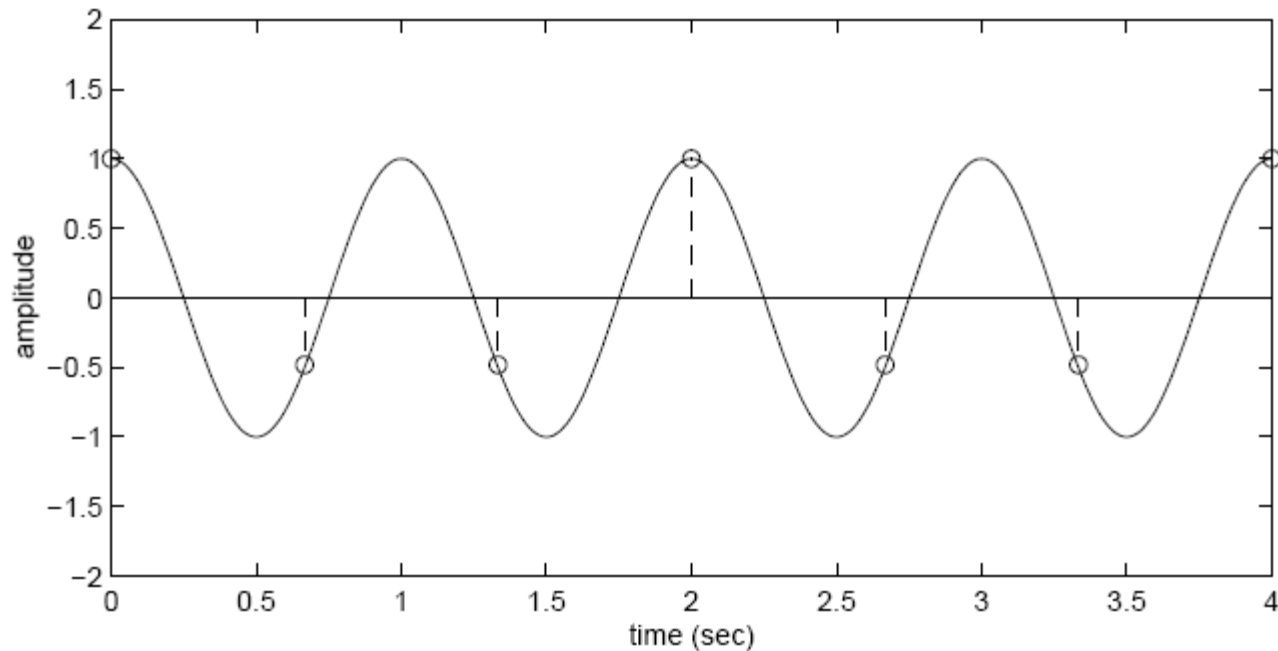

- ▶ Sampling a 1 Hz signal at 1.5 Hz is not enough
  - ▶ Why?


# Sampling

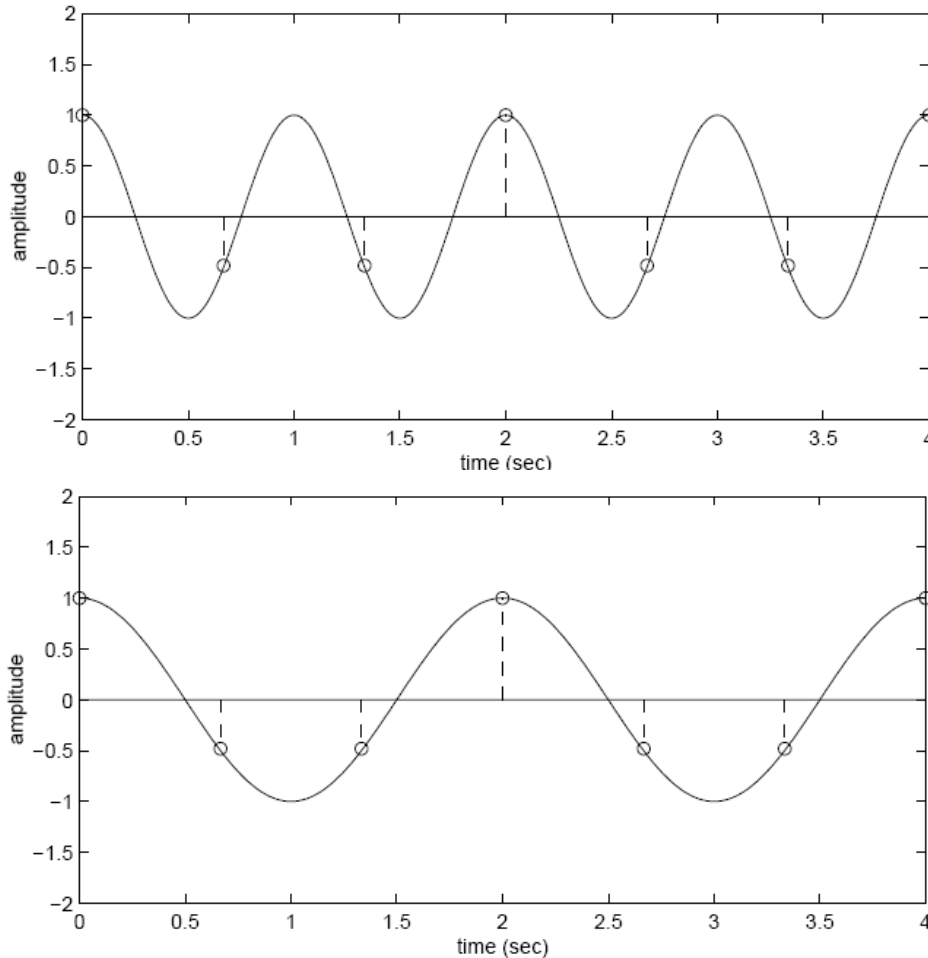

- ▶ Sampling a 1 Hz signal at 1.5 Hz is not enough
  - ▶ Can't distinguish between multiple possible signals
  - ▶ Problem known as **aliasing**




# What about more complex signals?

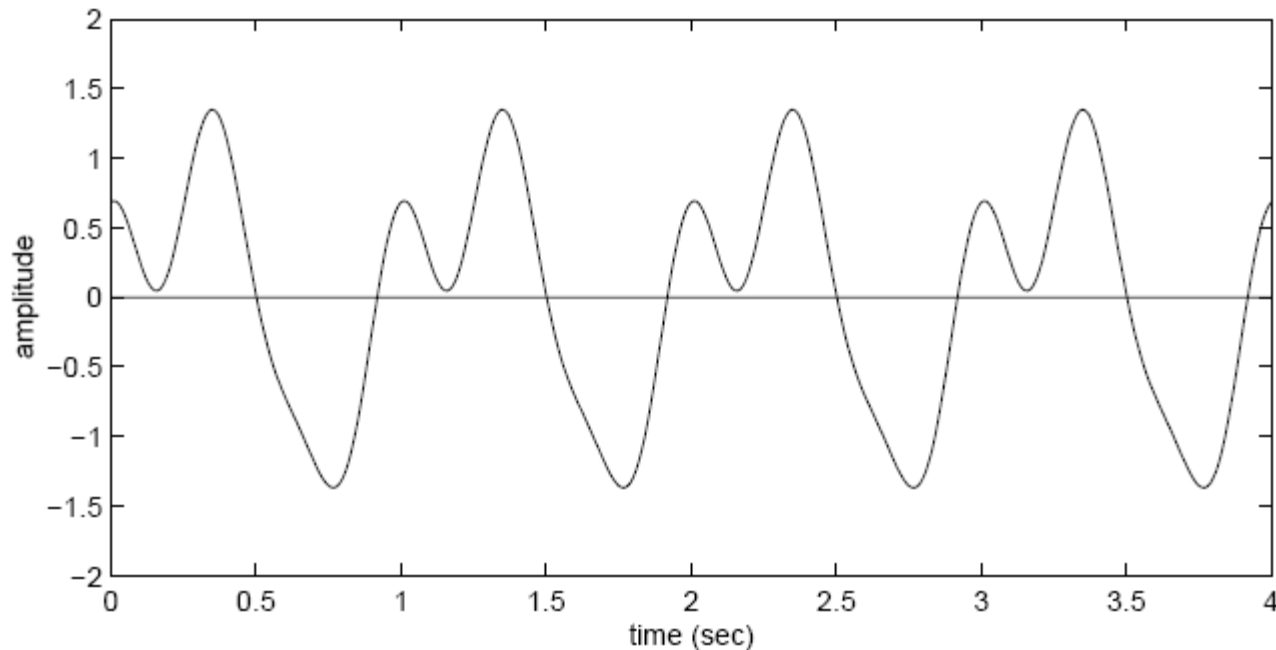

- ▶ Fourier's theorem
  - ▶ Any continuous signal can be decomposed into a sum of sines and cosines at different frequencies
- ▶ Example: Sum of 1 Hz, 2 Hz, and 3 Hz sines
  - ▶ How fast to sample?

# What about more complex signals?

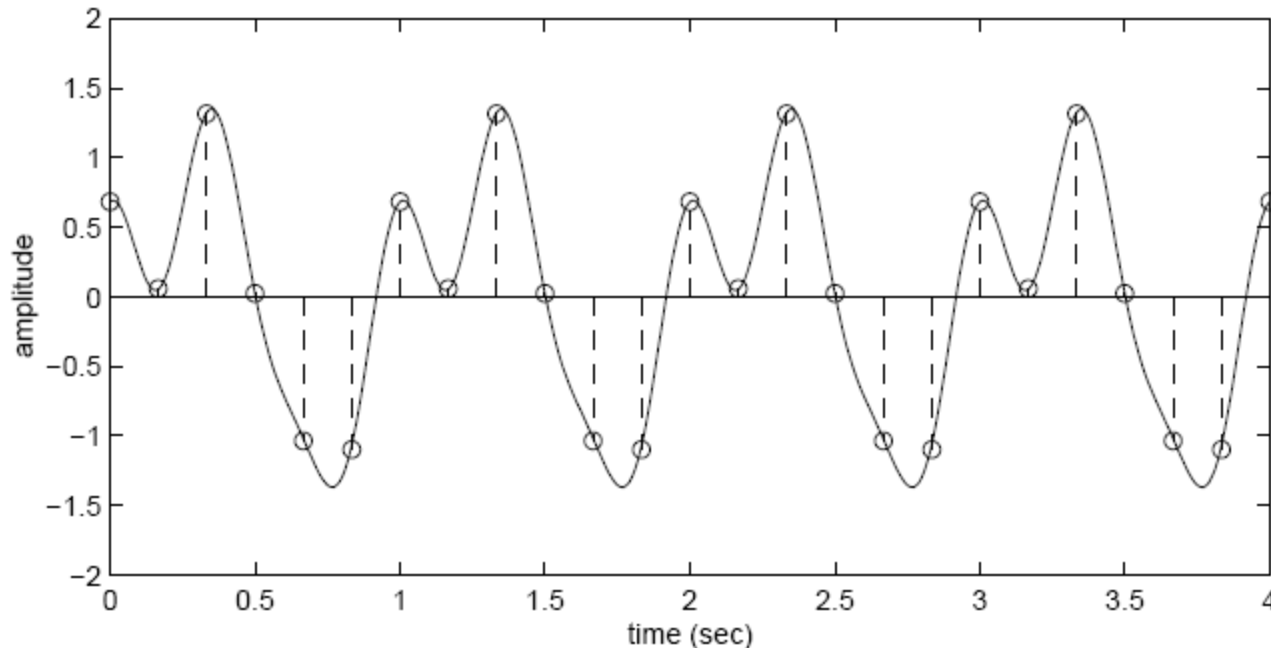

- ▶ Fourier's theorem
  - ▶ Any continuous signal can be decomposed into a sum of sines and cosines at different frequencies
- ▶ Example: Sum of 1 Hz, 2 Hz, and 3 Hz sines
  - ▶ How fast to sample? --> **answer: 6 Hz**

# Generalizing the Examples

---

- ▶ What data rate can a channel sustain?
- ▶ How is data rate related to bandwidth?
- ▶ How does noise affect these bounds?
- ▶ What else can limit maximum data rate?



# What Data Rate can a Channel Sustain?

## How is Data Rate Related to Bandwidth?

- ▶ Transmitting  $N$  distinct signals over a noiseless channel with bandwidth  $B$ , we can achieve at most a data rate of

$$\begin{array}{ccc} \text{Number of signals} & \longrightarrow & \boxed{2B} \boxed{\log_2 N} \longleftarrow \text{Number of bits per} \\ \text{per second} & & \text{signal} \end{array}$$

- ▶ ex.: a 3000 Hz channel can transmit data at a rate of at most 6000 bits/second
- ▶ Nyquist's Sampling Theorem (H. Nyquist, 1920's)



# What Data Rate can a Channel Sustain?

## How is Data Rate Related to Bandwidth?

- ▶ Transmitting **N** distinct signals over a noiseless channel with bandwidth **B**, we can achieve at most a data rate of

$$\text{Number of signals per second} \longrightarrow \boxed{2B} \boxed{\log_2 N} \longleftarrow \text{Number of bits per signal}$$

Baud rate

Number of **physical symbols** transmitted per second

rate of at most

- ▶ ex.: a 3000  
6000 bits/s

Bit rate

Actual number of **data bits** transmitted per second

- ▶ Nyquist's Relationship

Depends on the number of **bits** encoded in each **symbol**

(1920's)



# Noiseless Capacity

---

- ▶ Nyquist's theorem:  $2B \log_2 N$
- ▶ Example 1: sampling rate of a phone line
  - ▶  $B = 4000$  Hz
  - ▶  $2B = 8000$  samples/sec.
    - ▶ sample every 125 microseconds



# Noiseless Capacity

---

- ▶ Nyquist's theorem:  $2B \log_2 N$
- ▶ Example 2: noiseless capacity
  - ▶  $B = 1200 \text{ Hz}$
  - ▶  $N =$  each pulse encodes 16 symbols
  - ▶  $C =$



# Noiseless Capacity

---

- ▶ Nyquist's theorem:  $2B \log_2 N$
- ▶ Example 2: noiseless capacity
  - ▶  $B = 1200 \text{ Hz}$
  - ▶  $N = \text{each pulse encodes 16 symbols}$
  - ▶  $C = 2B \log_2 (N) = D \times \log_2 (N)$   
 $= 2400 \times 4 = 9600 \text{ bps}$



# How does Noise affect these Bounds?

---

## ► Noise

- Blurs the symbols, reducing the number of symbols that can be reliably distinguished

## ► Claude Shannon (1948)

- Extended Nyquist's work to channels with additive white Gaussian noise (a good model for thermal noise)

$$\text{channel capacity } C = B \log_2 (1 + S/N)$$

where

C is the maximum supportable bit rate

B is the channel bandwidth

S/N is the ratio between signal power  
and in-band noise power

↖  
N is noise

# How does Noise affect these Bounds?

---

- ▶ **Noise**

- ▶ Blurs the symbols, reducing the number of symbols that can be reliably distinguished

- ▶ **Claude Shannon (1948)**

- ▶ Extended Nyquist's work to channels with additive white Gaussian noise (a good model for thermal noise)

$$\text{channel capacity } C = B \log_2 (1 + S/N)$$

- ▶ **Represents error free capacity**

- ▶ also used to calculate the noise that can be tolerated to achieve a certain rate through a channel

- ▶ **Result is based on many assumptions**

- ▶ Formula assumes white noise (thermal noise)
- ▶ Impulse noise is not accounted for
- ▶ Various types of distortion are also not accounted for



# Noisy Capacity

---

## ► Telephone channel

### ► 3400 Hz at 40 dB SNR


$$\text{SNR(dB)} = 10 \log_{10} \left( \frac{P_{\text{signal}}}{P_{\text{noise}}} \right)$$

decibels (dB) is a **logarithmic** unit of measurement that expresses the magnitude of a physical quantity (usually power or intensity) relative to a specified or implied reference level



# Decibels

---

- ▶ A ratio between signal powers is expressed in decibels

$$\text{decibels (db)} = 10\log_{10}(P_1 / P_2)$$

- ▶ Used in many contexts
  - ▶ The loss of a wireless channel
  - ▶ The gain of an amplifier
- ▶ Note that dB is a relative value
  - ▶ Can be made absolute by picking a reference point
    - ▶ Decibel-Watt – power relative to 1W
    - ▶ Decibel-milliwatt – power relative to 1 milliwatt



# Signal-to-Noise Ratio

---

- ▶ **Signal-to-noise ratio (SNR, or S/N)**

- ▶ Ratio of

- ▶ the power in a signal  
to

- ▶ the power contained in the noise

$$(SNR)_{\text{dB}} = 10 \log_{10} \frac{\text{signal power}}{\text{noise power}}$$

- ▶ Typically measured at a receiver

- ▶ **A high SNR**

- ▶ High-quality signal

- ▶ **Low SNR**

- ▶ May be hard to “extract” the signal from the noise

- ▶ **SNR sets upper bound on achievable data rate**



# Noisy Capacity

---

## ▶ Telephone channel

▶ 3400 Hz at 40 dB SNR

▶  $C = B \log_2 (1 + S/N)$  bits/s

▶ SNR = 40 dB

$$40 = 10 \log_{10} (S/N)$$

$$S/N = 10,000$$

▶  $C = 3400 \log_2 (10001) = 44.8$  kbps

$$\text{SNR(dB)} = 10 \log_{10} \left( \frac{P_{\text{signal}}}{P_{\text{noise}}} \right)$$


# Shannon Discussion

---

- ▶ Bandwidth  $B$  and noise  $N$  are not independent
  - ▶  $N$  is the noise in the signal band, so it increases with the bandwidth
- ▶ Shannon does not provide the coding that will meet the limit, but the formula is still useful

# Shannon Discussion

---

- ▶ Bandwidth  $B$  and noise  $N$  are not independent
  - ▶  $N$  is the noise in the signal band, so it increases with the bandwidth
- ▶ Shannon does not provide the coding that will meet the limit, but the formula is still useful
- ▶ The performance gap between Shannon and a practical system can be roughly accounted for by a gap parameter
  - ▶ Still subject to same assumptions
  - ▶ Gap depends on error rate, coding, modulation, etc.

$$C = B \log_2(1 + \text{SNR}/T)$$



# More examples of Nyquist and Shannon Formulas

---

- ▶ Spectrum of a channel between 3 MHz and 4 MHz ;  
 $\text{SNR}_{\text{dB}} = 24 \text{ dB}$

$$B =$$

$$\text{SNR} =$$

- ▶ Using Shannon's formula

$$C = B \log_2 (1 + S/N)$$

# More examples of Nyquist and Shannon Formulas

---

- ▶ Spectrum of a channel between 3 MHz and 4 MHz ;  
 $\text{SNR}_{\text{dB}} = 24 \text{ dB}$

$$B = 4 \text{ MHz} - 3 \text{ MHz} = 1 \text{ MHz}$$

$$\text{SNR}_{\text{dB}} = 24 \text{ dB} = 10 \log_{10}(\text{SNR})$$

$$\text{SNR} = 251$$

- ▶ Using Shannon's formula

$$C = B \log_2 (1 + S/N)$$

$$C = 10^6 \times \log_2 (1 + 251) \approx 10^6 \times 8 = 8 \text{ Mbps}$$

# More examples of Nyquist and Shannon Formulas

---

- ▶ How many signaling levels are required?

$$C = 2B \log_2 M$$

# More examples of Nyquist and Shannon Formulas

---

- ▶ How many signaling levels are required?

$$C = 2B \log_2 M$$

$$8 \times 10^6 = 2 \times (10^6) \times \log_2 M$$

$$4 = \log_2 M$$

$$M = 16$$

- ▶ Look out for: dB versus linear values,  $\log_2$  versus  $\log_{10}$

# Multiplexing


- ▶ **Capacity of transmission medium**
  - ▶ May exceed capacity required for transmission of a single signal
- ▶ **Multiplexing**
  - ▶ Carrying multiple signals on a single medium
  - ▶ More efficient use of transmission medium






# Multiplexing

- ▶ **FDM: Frequency Division Multiplexing**
  - ▶ Channel spectrum divided into frequency bands
  - ▶ Each assigned fixed frequency band/reduced rate
  - ▶ Unused transmission time in frequency bands go idle
  - ▶ Example: 6-station LAN, 1,3,4 transmit, frequency bands 2,5,6 idle

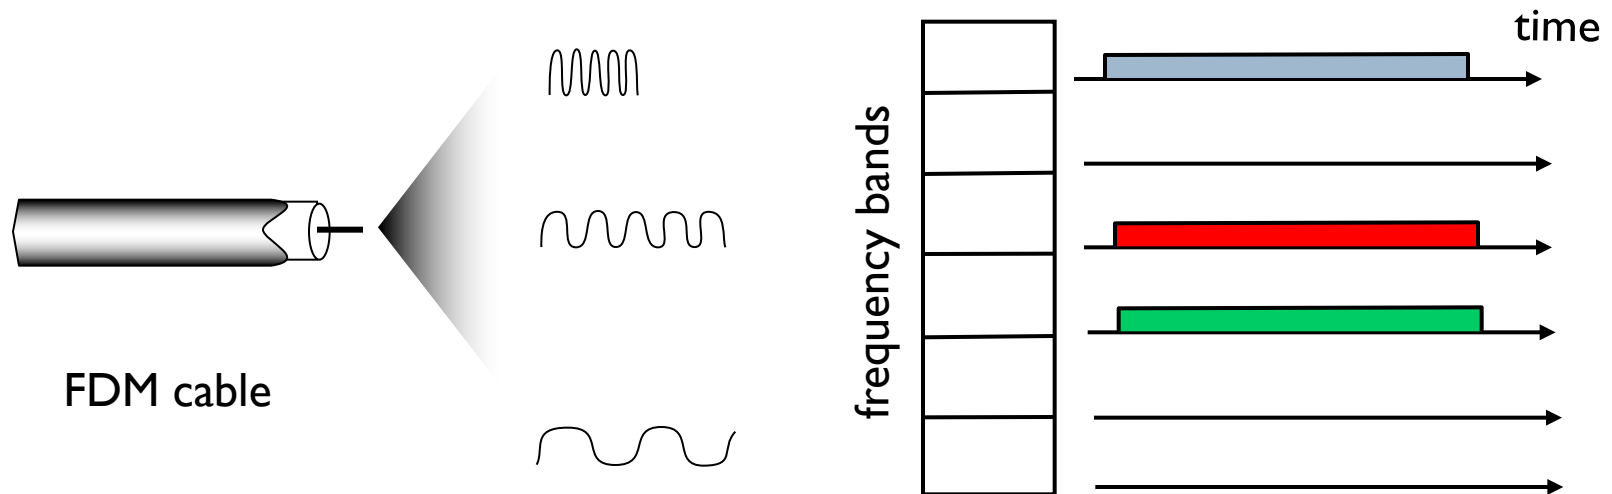

# Multiplexing

- ▶ TDM: Time Division Multiplexing
  - ▶ Access in "rounds"
    - ▶ Each user/node/etc... gets fixed length slot in each round
    - ▶ Each user can sent at full speed some of the time
    - ▶ Unused slots go idle
  - ▶ Example: 6-slots with transmissions in slots 0, 3, and 4

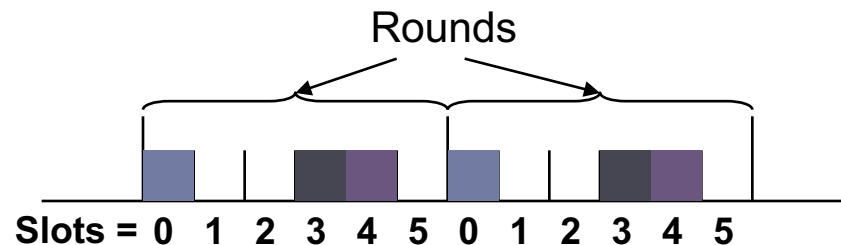

# FDM Example: AMPS

---

- ▶ US analog cellular system in early 80's
- ▶ Each call uses an up and down link channel
  - ▶ Channels are 30 KHz
- ▶ About 12.5 + 12.5 MHz available for up and down link channels per operator
  - ▶ Supports 416 channels in each direction
  - ▶ 21 of the channels are used for data/control
  - ▶ Total capacity (across operators) is double of this



# TDM Example: GSM

---

- ▶ **Global System for Mobile communication**
  - ▶ First introduced in Europe in early 90s
- ▶ **Uses a combination of TDM and FDM**
- ▶ **25 MHz each for up and down links.**
- ▶ **Broken up in 200 KHz channels**
  - ▶ 125 channels in each direction
  - ▶ Each channel can carry about 270 kbs
- ▶ **Each channel is broken up in 8 time slots**
  - ▶ Slots are 0.577 msec long
  - ▶ Results in 1000 channels, each with about 25 kbs of useful data; can be used for voice, data, control
- ▶ **General Packet Radio Service (GPRS)**
  - ▶ Data service for GSM, e.g. 4 down and 1 up channel



# Frequency Reuse in Space

- ▶ Frequencies can be reused in space
  - ▶ Distance must be large enough
  - ▶ Example: radio stations
- ▶ Basis for “cellular” network architecture
- ▶ Set of “base stations” connected to the wired network support set of nearby clients
  - ▶ Star topology in each circle
  - ▶ Cell phones, 802.11, ...

