

Poker Buddy: Chipless Poker Companion

Introduction

Problem

Traditional poker games rely heavily on physical chips for betting, which can be cumbersome, error-prone, and prone to mismanagement or theft. Managing chip counts, handling physical money, and tracking bet amounts often slow down the game and can lead to disputes among players. In addition, determining whose turn it is during fast-paced games can be confusing and cause a lot of frustration between players. With the growing demand for digital integration in gaming, there is an opportunity to streamline the poker experience by eliminating physical chips and automating bet tracking and game flow. This is different from online poker because we want to maintain the in person experience of playing against your friends face to face, but without the inefficiencies of standard chips and markers that represent blinds.

Solution


We propose a modular device that removes the need for physical chips while enhancing the poker-playing experience. Each player will use a dedicated device that features LED displays to show both their current balance and the money in the pot, along with a built-in turn indicator light that activates when it is their turn. We will use a force sensitive touch sensor to interpret different gestures—one tap for fold, two taps for check, and a long hold for call—eliminating the need for manual chip handling to signal actions. Additionally, five colored buttons correspond to different chip denominations for quick and easy betting. While we could use some type of sensor for these buttons, we want to maintain the tactile feel and choose to use buttons for our design. These devices will wirelessly connect to a centralized mobile/web application that manages buy-ins, tracks all player balances, and synchronizes game status in real time, ensuring an efficient and error-free gaming experience. Although these devices will not track cards, they must handle the real-time logic of betting, maintaining balances, and managing turn order without relying on a computer.

The game logic is distributed and managed by the PCBs in each Poker Buddy. This means that each Poker Buddy keeps track of:

- Whose turn it is to bet (reflected by the turn signal LED).
- The current bet amounts and how they contribute to the pot(reflected by LCD display).
- The players' individual balances(reflected by another LCD display).
- The outcome of each hand (i.e., when a player wins, the entire pot is automatically credited to their balance).

These devices communicate wirelessly with each other and can optionally sync with a centralized mobile application for overall game monitoring and account management by the host of the game (this will just be used for buying in chips and determining payouts at the end). The system is designed to be portable and is powered by disposable batteries, ensuring flexibility and ease-of-use in various settings.

Visual Aid

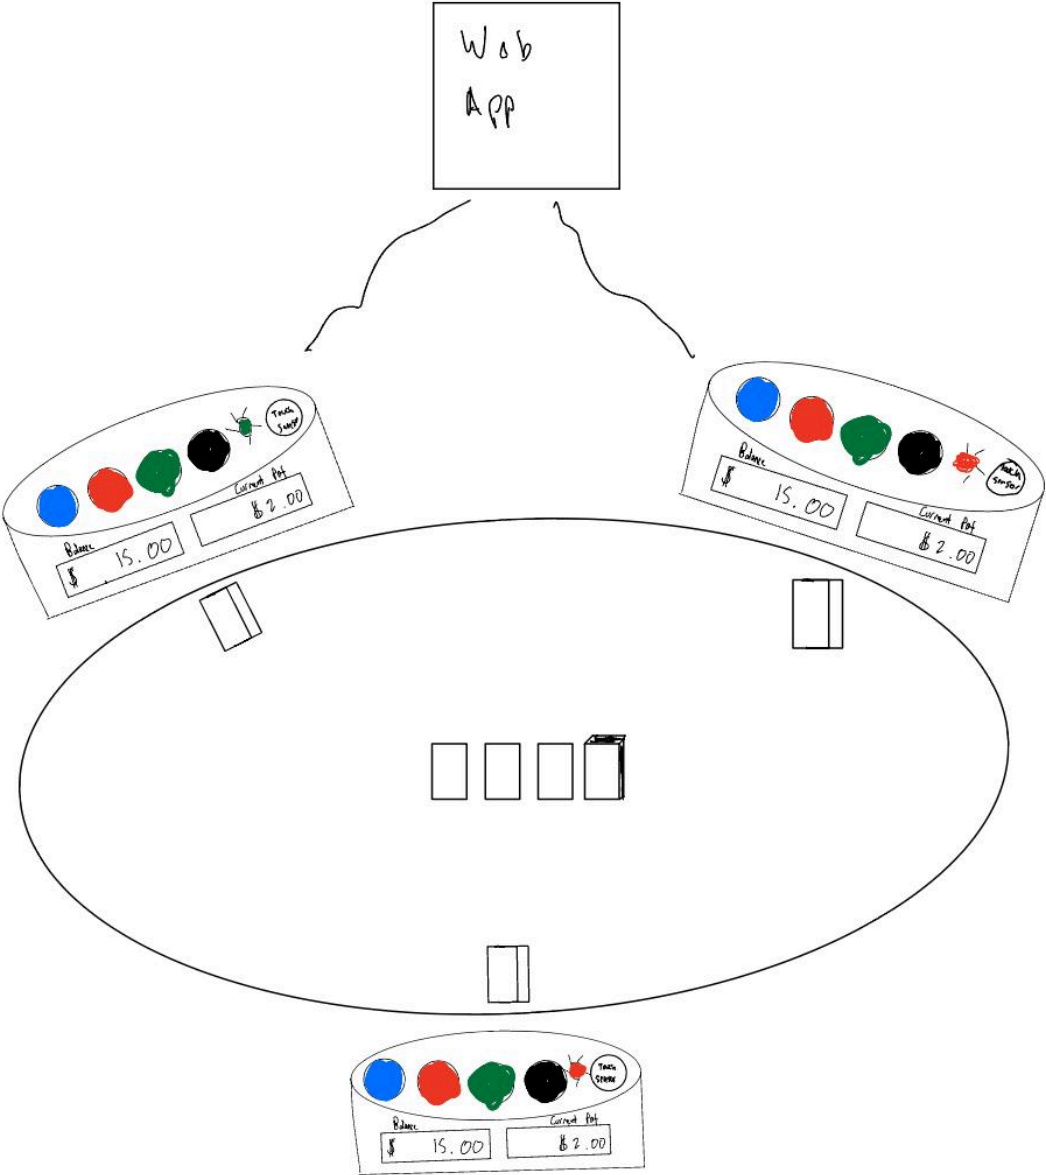


High-Level Requirements list

1. The game is mathematically correct. This means that 100% of the time the machine will keep track of all the players current balances, each individual game's pot and player contributions, along with the final calculations after each game has been completed.
2. The status of the game will update immediately and accurately after the user interacts with the device. This means that 98% of the time the user's inputs will be recognized correctly, while 100% of the time the machine will do the proper command from the read input.
3. The machine will have reliable wireless communication as long as all the devices are within an 8 foot radius of the table. This will ensure that all players know how close to the device to maintain proper gameplay and communication.

Design

Block Diagram

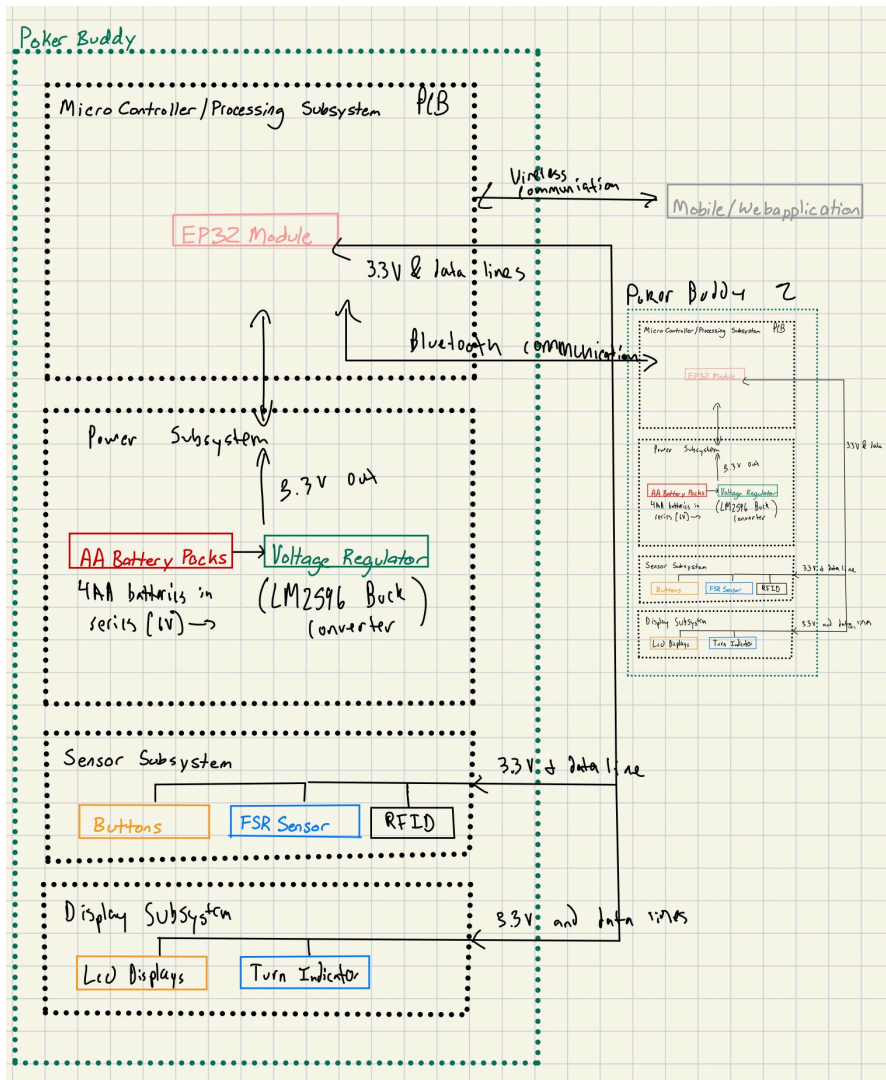

Subsystem Overview

- Microcontroller and Processing Subsystem
 - This is the core of the Poker Buddy design. It houses the ESP32-WROOM-32 module. This subsystem performs all the critical game logic which includes tracking bets, pot sizes, player balances, and turn order. It does this while orchestrating communication between the various sensors and displays. It sends and receives data between the Sensor Subsystem for user inputs, then updates the Display Subsystem in real time, and then relies on the Power Subsystem for stable operation. Additionally, this subsystem's wireless capabilities allow optional synchronization with a mobile or web application.
- Power Subsystem
 - This subsystem supplies and regulates the voltage necessary for all the components to function reliably. It typically comprises AA battery packs feeding into a voltage regulator (LM2596 buck converter) to ensure a steady 3.3 V supply for the microcontroller and other electronics. By providing clean, stable power, this subsystem is essential for maintaining the performance and longevity of the device. It directly interfaces with the Microcontroller and Processing Subsystem to prevent voltage fluctuations or power loss during play.
- Sensor Subsystem
 - Within the Sensor Subsystem, force sensor readings for fold, check, and call gestures are recorded, together with button presses for betting amounts. For further features like player identification or upcoming expansions, an optional RFID reader might also be added. The Microcontroller and Processing Subsystem receives the data from these sensors, processes it, and uses it to update the game's state and activate any required wireless events or displays.
- Display Subsystem
 - The Display Subsystem uses LED displays that show each player's balance and the quantity of pot in use, as well as a turn indicator LED to indicate whose turn it is. It also gives the players visual feedback in real time. When betting actions or the turn order change, it instantly updates the displays based on data and control signals received from the Microcontroller and Processing Subsystem. This guarantees that each participant is always aware of the current condition of the game.

Subsystem Requirements

- Microcontroller and Processing Subsystem
 - The Microcontroller and Processing Subsystem, centered around the ESP32-WROOM-32 module executes the distributed game logic. This includes bet tracking, player balance updates, turn management, and hand outcomes – while managing all sensor inputs and output displays. It interfaces with the Sensor Subsystem via 3.3V logic-level GPIO, ADC, and SPI (for the RFID module), with sensor data required to be processed within 100 ms, and outputs to two 7-segment LED displays and a dedicated turn indicator LED, which must update within 5 seconds of a game event. The ESP32 provides built-in WiFi/bluetooth connectivity to ensure a wireless communication range of at least

16 feet, synchronizing real-time data with an optional Mobile/Web Application. This subsystem must operate at a stable $3.3V \pm 0.1V$ and handle a minimum processing throughput that guarantees game logic execution in under 100 ms.

- Power Subsystem
 - The Power Subsystem uses AA battery packs and an LM2596 buck converter to provide a regulated $3.3 V \pm 0.1 V$ to the full Poker Buddy device. It maintains the stability of the Microcontroller, Sensor, and Display Subsystems by guaranteeing a minimum of 500 mA of constant current with a low voltage ripple (<50 mV). Critical functions like wireless communication, sensor detection, or display updates would be jeopardized if the subsystem did not fulfill these requirements, for example, by supplying insufficient current or large voltage dips, which would cause instability across the system.
- Sensor Subsystem
 - A force-sensitive resistor (for fold, check, and call), several betting buttons, and an optional RFID reader are used by the Sensor Subsystem to understand user inputs. It must send legitimate input signals to the Microcontroller Subsystem in less than 50 milliseconds and runs at 3.3 volts logic levels. Hardware/software debouncing is utilized to minimize false triggers because accuracy is crucial—at least 98% of identified movements must be accurate. By resulting in missed or invalid betting inputs, removing any of these requirements—such as an adequate response time or high detection accuracy—would compromise the integrity of the game.
- Display Subsystem
 - A turn indicator LED and two 7-segment LED displays (for pot and player balances) make up the Display Subsystem, which is controlled by a microcontroller. Players are guaranteed to witness real-time changes in pot size and turn order as it updates within five seconds of valid inputs. Furthermore, in typical indoor lighting conditions, it maintains a legible brightness level while drawing power from the controlled 3.3 V rail. The system would not be able to accurately tell players if certain requirements—like quick updates and adequate visibility—were not met, which would erode players' confidence in the betting calculations made by the gadget.

Tolerance Analysis:

One aspect of our project that could pose a risk is if our force-sensitive touch sensor does not consistently detect gestures with the required 98% accuracy. This would ultimately lead to misinterpreted inputs resulting in incorrect game actions causing arguments and poor user experience. To best address this, we need to make sure our project stays very accurate.

Our overall accuracy can be seen by this equation $A = w_1 \cdot p_1 + w_2 \cdot p_2 + w_3 \cdot p_3$ where w_1, w_2, w_3 is the action we take and p_1, p_2, p_3 is probability for single tap, double tap, and long hold respectively. Assuming we take every action equally, all w is $\frac{1}{3}$. Even without 100%

accuracy on every action, with up to 4% error on any 2 probabilities we can still achieve the given target of 98%. This can be seen if we did statistical validation for 1000 trials with observed accuracies of $p_1 = 0.96$, $p_2 = 0.96$, and $p_3 = 0.99$. With this we can calculate the 95% confidence interval using the formula $CI = A (+,-) z * \sqrt{(A*(1-A))/n}$. We use $n = 1000$ and $z\text{-score} = 1.96$ to get a value of $0.975 (+,-) 0.0106$ meaning the range is $[0.9644, 0.9856]$. The 95% confidence interval here includes the target of 98% demonstrating how even with inflated error margins our project will still reach needed accuracy to allow for smooth user experience.

To best handle this, we will use threshold based algorithms for our force sensor to clearly distinguish between each action. One sample way is single tap (force exceeds threshold for short duration < 200 ms), double tap (two force peaks within specific time window, 500 ms), and long hold (force exceeds threshold for extended duration > 1 second). We will also make sure our force resistor can detect light taps and long holds with high precision as well as have strong response time to meet subsystem requirements.

Overall, by closely testing and creating detailed ways to guarantee actions match up with expectations, we can make sure that our project stays within tolerance limits and creates a strong user experience.

Ethics and Safety:

With our project, there are various ethical and safety issues that have to be addressed both while creating and using our project. To start, we have to make sure that our project has privacy and data security. The mobile app we create collects user data (player balances, game history, etc) raising concerns about personal information. From the IEEE code, we have to protect user privacy and ensure data security so we would do this by allowing for tokenized authentication so only respective users can log in and have the option to clear out data after every game. Another aspect is addiction and responsible use. Our project could facilitate excessive gambling. The IEEE Code of Ethics says that engineers must consider the societal impact of their work and avoid harm. To this effect, we would include features to set betting limits or session timers as well as provide consistent warnings/reminders to take breaks during extended gameplay.

In addition we should prevent safety issues which include electrical safety when developing. We will need to use AA batteries and wireless communication in our project and in doing this we have to make sure not to create electrical shocks or fires. In order to prevent this, we will develop our project incrementally testing smaller sub-components and creating clean block diagrams with voltages and electrical components clearly defined before moving forward to ensure robust design. One other area which could cause problems is the device's small components (buttons, sensors) which could pose choking hazards or injury if mishandled. We would try to mitigate this by developing the device with rounded edges and more durable materials as well including warnings in user manual about preventing smaller children from using this device.

By addressing these ethical and safety issues, our Poker Buddy project can make sure of responsible development and use.