

EXAM III


Physics 101: Lecture 18 Fluids II

Textbook Sections 9.6 – 9.8



Review Static Fluids

- Pressure is force exerted by molecules “bouncing” off container $P = F/A$

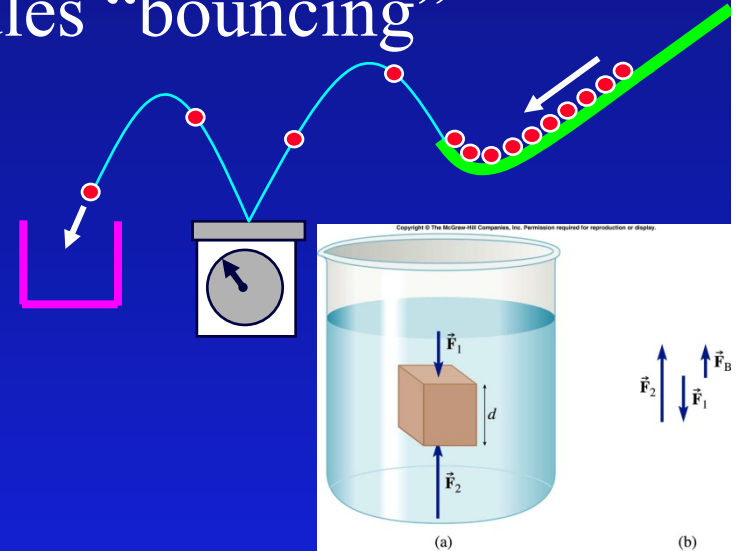

- Gravity/weight effects pressure

$$\rightarrow P = P_0 + \rho g d$$

- Buoyant force is “weight” of displaced fluid.

$$\rightarrow F_B = \rho g V_{\text{displaced}}$$

Today: *Moving fluids!*

$$A_1 v_1 = A_2 v_2$$

$$P_1 + \rho g y_1 + \frac{1}{2} \rho v_1^2 = P_2 + \rho g y_2 + \frac{1}{2} \rho v_2^2$$

Archimedes' Principle

- Buoyant Force (F_B)

- weight of fluid displaced

- $F_B = \rho_{\text{fluid}} V_{\text{displaced}} g$

- $F_g = mg = \rho_{\text{object}} V_{\text{object}} g$

- object **sinks** if $\rho_{\text{object}} > \rho_{\text{fluid}}$

- object **floats** if $\rho_{\text{object}} < \rho_{\text{fluid}}$



- If object floats...

- $F_B = F_g$



- Therefore: $\rho_{\text{fluid}} V_{\text{displaced}} g = \rho_{\text{object}} V_{\text{object}} g$

- Therefore: $V_{\text{displaced}} / V_{\text{object}} = \rho_{\text{object}} / \rho_{\text{fluid}}$

Preflight 1

Suppose you float a large ice-cube in a glass of water, and that after you place the ice in the glass the level of the water is at the very brim. When the ice melts, the level of the water in the glass will:

1. Go up, causing the water to spill out of the glass
2. Go down.
3. Stay the same. ← CORRECT

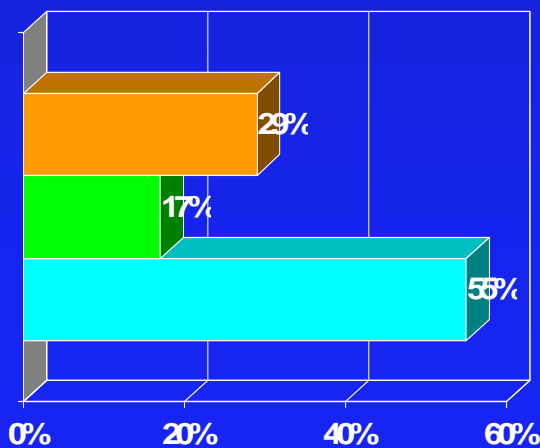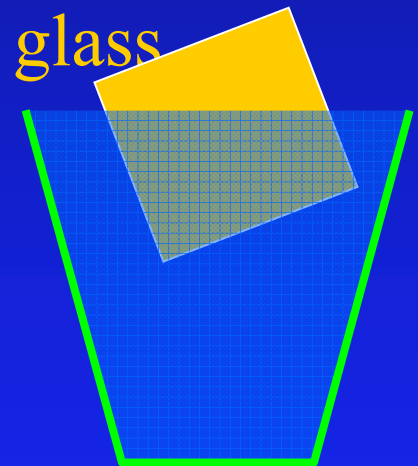



$$F_B = \rho_W V_{\text{displaced}} g$$

$$W = \rho_{\text{ice}} V_{\text{ice}} g \rightarrow \rho_W V_{\text{melted_ice}} g$$

Preflight 2


Which weighs more:

1. A large bathtub filled to the brim with water.
2. A large bathtub filled to the brim with water with a battle-ship floating in it.
3. They will weigh the same. ← CORRECT

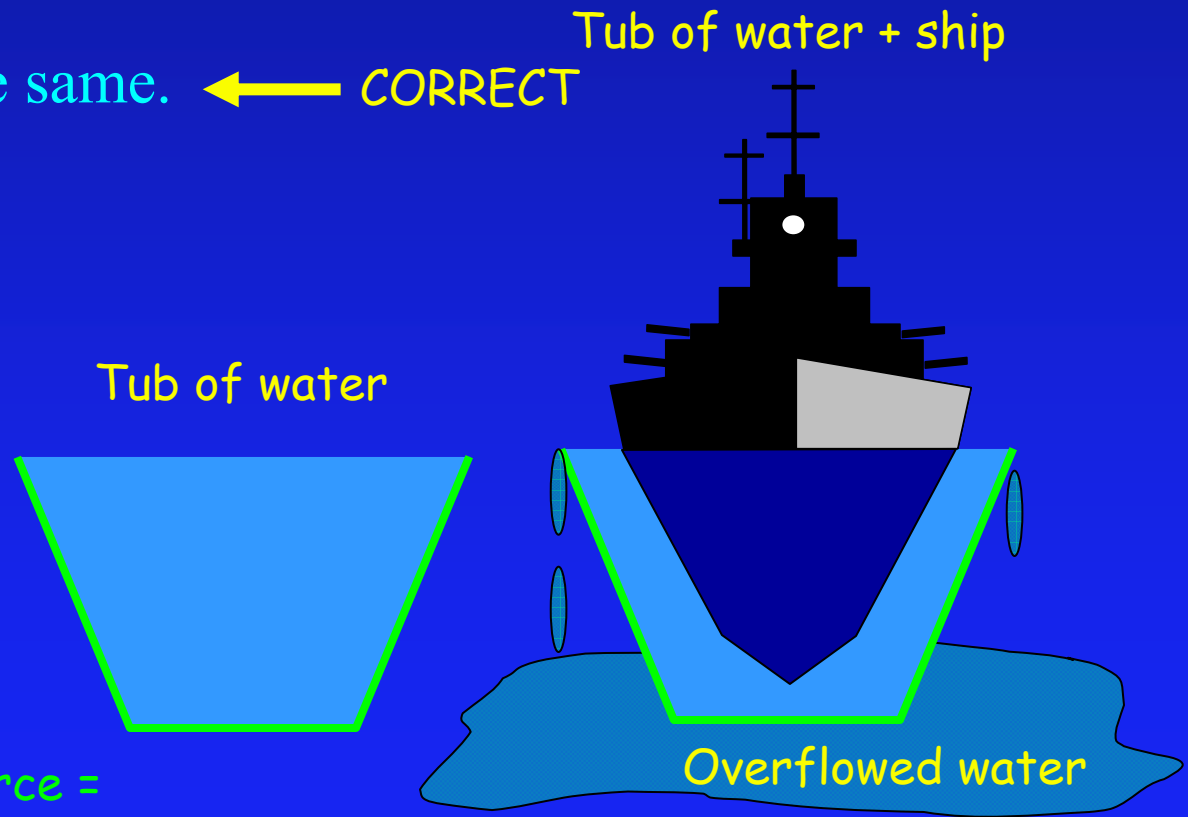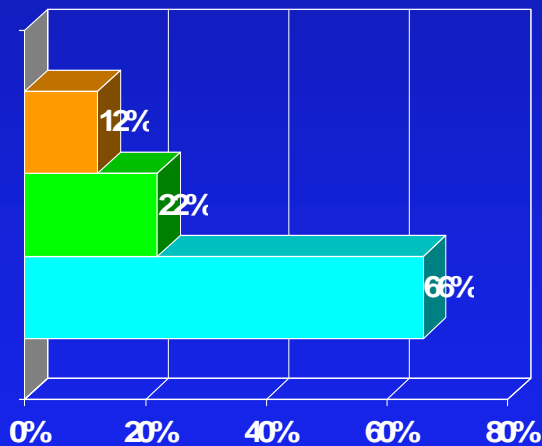

Weight of ship = Buoyant force =
Weight of displaced water

Continuity of Fluid Flow

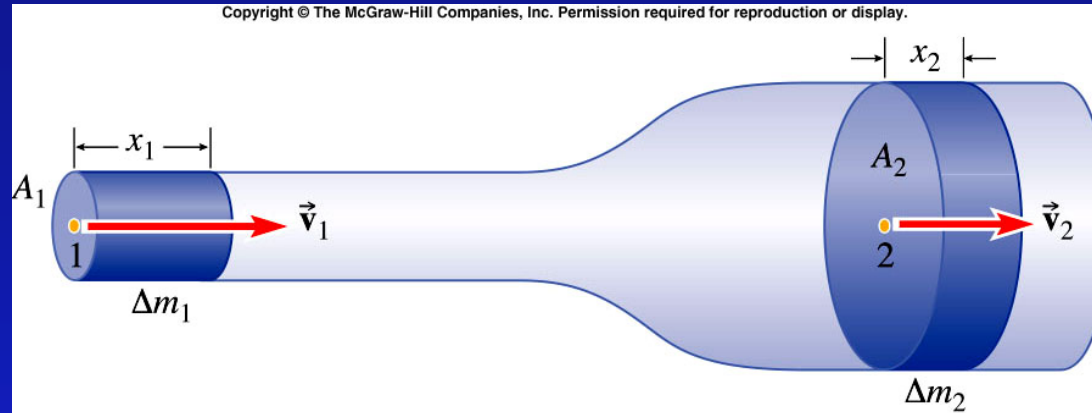

- Watch “plug” of fluid moving through the narrow part of the tube (A_1)
 - Time for “plug” to pass point $\Delta t = x_1 / v_1$
 - Mass of fluid in “plug” $m_1 = \rho \text{Vol}_1 = \rho A_1 x_1$ or $m_1 = \rho A_1 v_1 \Delta t$
- Watch “plug” of fluid moving through the wide part of the tube (A_2)
 - Time for “plug” to pass point $\Delta t = x_2 / v_2$
 - Mass of fluid in “plug” $m_2 = \rho \text{Vol}_2 = \rho A_2 x_2$ or $m_2 = \rho A_2 v_2 \Delta t$
- Continuity Equation says $m_1 = m_2$ fluid isn't building up or disappearing

$$\bullet A_1 v_1 = A_2 v_2$$

Faucet Preflight

A stream of water gets narrower as it falls from a faucet (try it & see).

Explain this phenomenon using the equation continuity


As the water flows down, gravity makes the velocity of the water go faster so the area of the water decreases.

Because it scared of the dirty dishes in the sink.


wow it does!

My faucet does not act this way

After the demo involving the bicycle tire and angular momentum, I have decided that physics is sorcery and therefore unexplainable. Ask Harry Potter

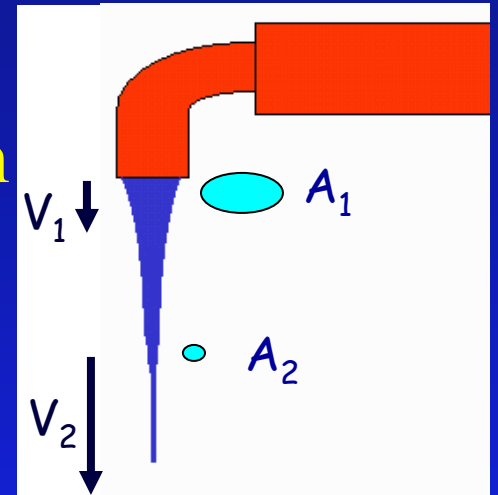

Fluid Flow Concepts

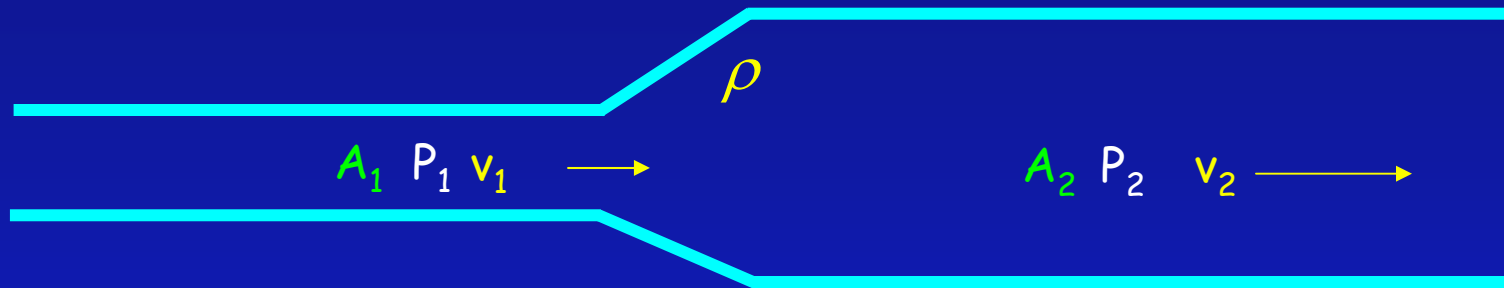

- Mass flow rate: ρAv (kg/s)
- Volume flow rate: Av (m^3/s)
- Continuity: $\rho A_1 v_1 = \rho A_2 v_2$
i.e., mass flow rate the same everywhere
e.g., flow of river

Pressure, Flow and Work

- Continuity Equation says fluid speeds up going to smaller opening, slows down going to larger opening

- Acceleration due to change in pressure. $P_1 > P_2$

→ Smaller tube has faster water and LOWER pressure

- Change in pressure performs work!

→ $W = P_1 A_1 \Delta x_1 - P_2 A_2 \Delta x_2 = (P_1 - P_2) \text{Volume}$


Recall:

$$W = F d$$

$$= P A d$$

$$= P \text{ Vol}$$

Demo

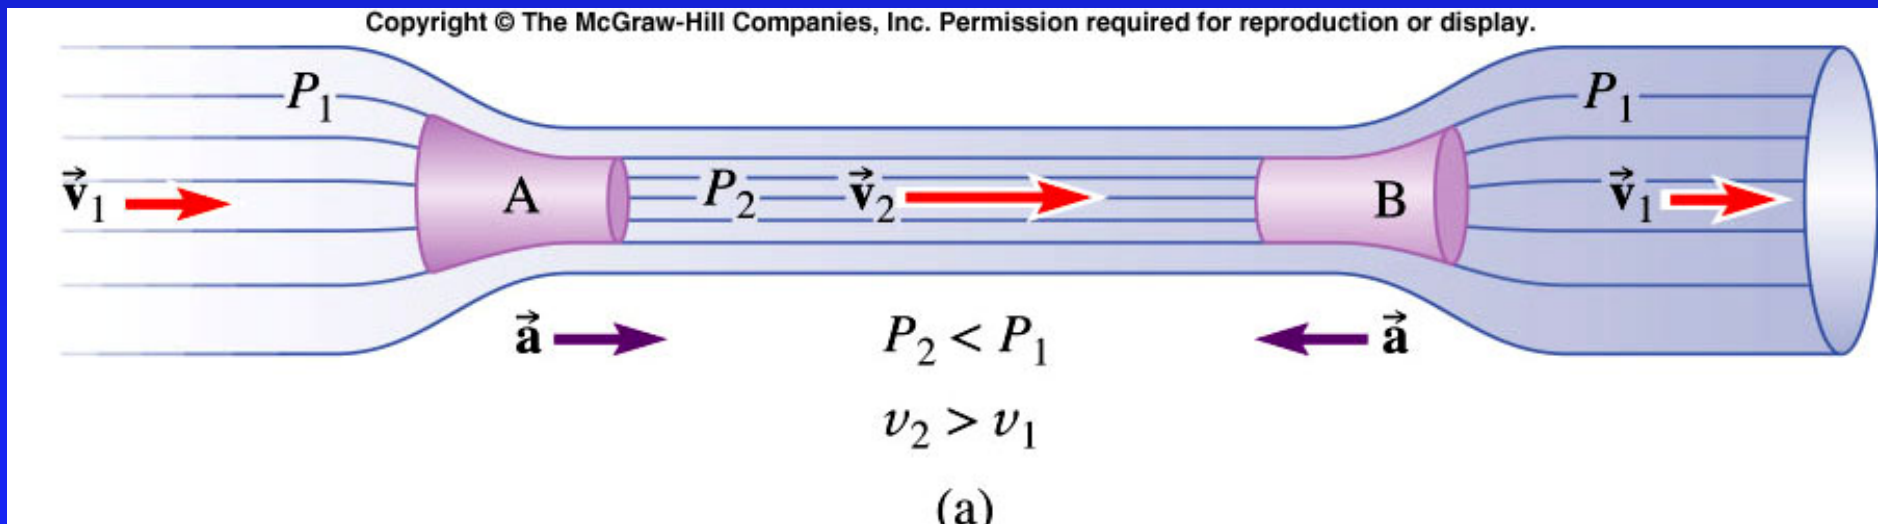


Pressure ACT

- What will happen when I “blow” air between the two plates?

A) Move Apart

B) Come Together

C) Nothing

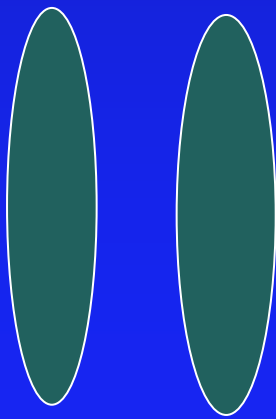

There is air pushing on both sides of plates. If we get rid of the air in the middle, then just have air on the outside pushing them together.

Bernoulli's Eqs. And Work

- Consider tube where both Area, height change.

$$\rightarrow W = \Delta K + \Delta U$$

$$(P_1 - P_2) V = \frac{1}{2} m (v_2^2 - v_1^2) + mg(y_2 - y_1)$$

$$(P_1 - P_2) V = \frac{1}{2} \rho V (v_2^2 - v_1^2) + \rho V g (y_2 - y_1)$$


$$P_1 + \rho g y_1 + \frac{1}{2} \rho v_1^2 = P_2 + \rho g y_2 + \frac{1}{2} \rho v_2^2$$

Note:

$$W = F d$$

$$= P A d$$

$$= P V$$

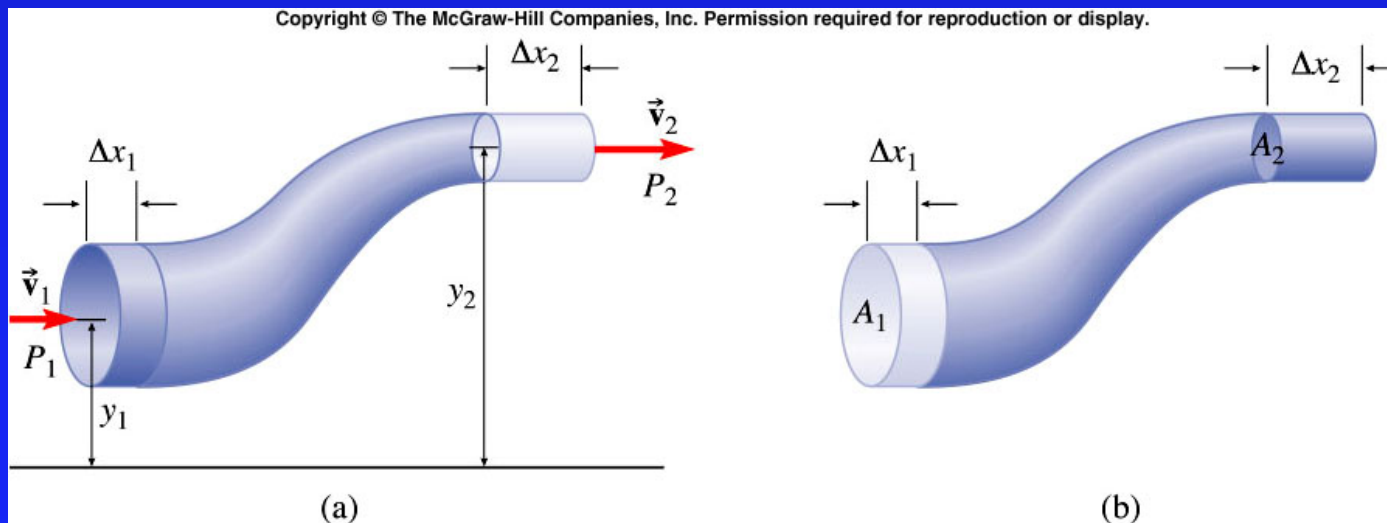

Bernoulli ACT

- Through which hole will the water come out fastest?


$$P_1 + \rho g y_1 + \frac{1}{2} \rho v_1^2 = P_2 + \rho g y_2 + \frac{1}{2} \rho v_2^2$$

Note: All three holes have same pressure
 $P = 1$ Atmosphere

$$\rho g y_1 + \frac{1}{2} \rho v_1^2 = \rho g y_2 + \frac{1}{2} \rho v_2^2$$

$$g y_1 + \frac{1}{2} v_1^2 = g y_2 + \frac{1}{2} v_2^2$$

Smaller y gives larger v . Hole C is fastest

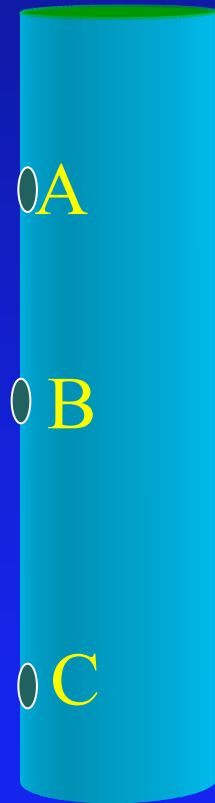


Act

A large bucket full of water has two drains. One is a hole in the side of the bucket at the bottom, and the other is a pipe coming out of the bucket near the top, which bent is downward such that the bottom of this pipe even with the other hole, like in the picture below:

Though which drain is the water spraying out with the highest speed?

1. The hole
2. The pipe
3. Same ← CORRECT

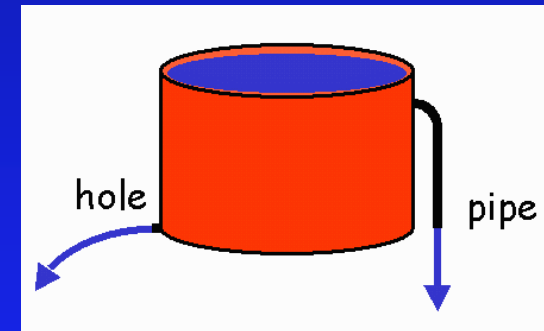

Note, the correct height, is where the water reaches the atmosphere, so both are exiting at the same height!

Example (like HW)

A garden hose w/ inner diameter 2 cm, carries water at 2.0 m/s. To spray your friend, you place your thumb over the nozzle giving an effective opening diameter of 0.5 cm. What is the speed of the water exiting the hose? What is the pressure difference between inside the hose and outside?

Continuity Equation

$$\begin{aligned}A_1 v_1 &= A_2 v_2 \\v_2 &= v_1 (A_1/A_2) \\&= v_1 (\pi r_1^2 / \pi r_2^2) \\&= 2 \text{ m/s} \times 16 = 32 \text{ m/s}\end{aligned}$$

Bernoulli Equation

$$\begin{aligned}P_1 + \rho g y_1 + \frac{1}{2} \rho v_1^2 &= P_2 + \rho g y_2 + \frac{1}{2} \rho v_2^2 \\P_1 - P_2 &= \frac{1}{2} \rho (v_2^2 - v_1^2) \\&= \frac{1}{2} \times (1000 \text{ kg/m}^3) (1020 \text{ m}^2/\text{s}^2) = 5.1 \times 10^5 \text{ PA}\end{aligned}$$



Lift a House

Calculate the net lift on a 15 m x 15 m house when a 30 m/s wind (1.29 kg/m^3) blows over the top.

$$P_1 + \rho g y_1 + \frac{1}{2} \rho v_1^2 = P_2 + \rho g y_2 + \frac{1}{2} \rho v_2^2$$

$$P_1 - P_2 = \frac{1}{2} \rho (v_2^2 - v_1^2)$$

$$= \frac{1}{2} \rho (v_2^2 - v_1^2)$$

$$= \frac{1}{2} (1.29) (30^2) \text{ N / m}^2$$

$$= 581 \text{ N / m}^2$$


$$F = P A$$

$$= 581 \text{ N / m}^2 (15 \text{ m})(15 \text{ m}) = 131,000 \text{ N}$$

$$= 29,000 \text{ pounds! (note roof weighs 15,000 lbs)}$$



Fluid Flow Summary

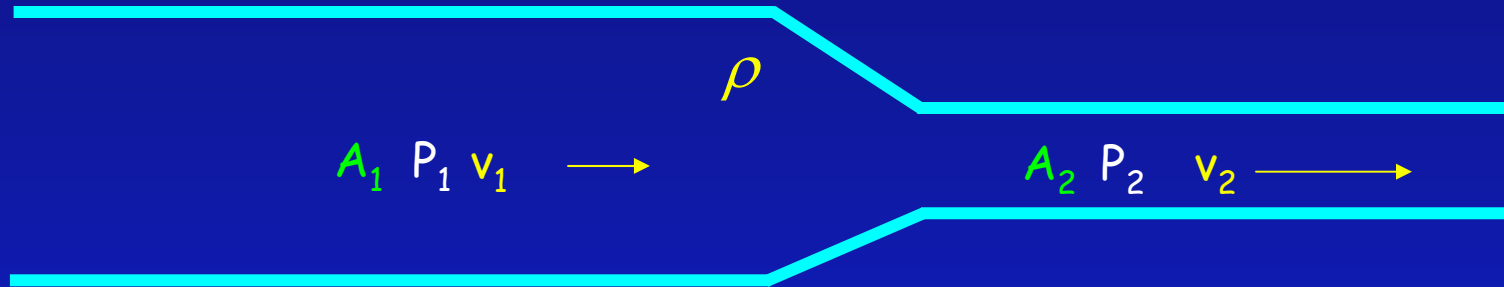

- Mass flow rate: ρAv (kg/s)
- Volume flow rate: Av (m^3/s)
- Continuity: $\rho A_1 v_1 = \rho A_2 v_2$
- Bernoulli: $P_1 + \frac{1}{2} \rho v_1^2 + \rho gh_1 = P_2 + \frac{1}{2} \rho v_2^2 + \rho gh_2$