

Statics - TAM 210 & TAM 211

Lecture 25

March 16, 2018

Chap 8.1

Announcements

- ❑ Check your grades in Compass2g Gradebook
 - ❑ **Report missing or incorrect grades within 2 weeks. Do not report grading errors after final grades are posted, as these will not be changed!**
- ❑ No TA/CA office hours during Spring Break (Sunday March 18 - Sunday March 25)
- ❑ Upcoming deadlines:
 - Quiz 5 (3/14-16)
 - Monday (3/26)
 - Mastering Engineering Tutorial 11
 - Thursday (3/29)
 - WA 4 due
 - Monday (4/2)
 - PL HW 9/11
 - Friday (3/30)
 - Last lecture for TAM 210 students
 - Written exam (Thursday 4/5, 7-9pm in 1 Noyes Lab)
 - Conflict exam (Monday 4/2, 7-9pm)
 - **Must make arrangements with Prof. H-W by Friday 3/16**
 - DRES accommodation exam. Make arrangements at DRES. Must tell Prof. H-W

Today (March 16) is the last day to withdrawal from this course with getting a W on your transcript

Chapter 8: Friction

Goals and Objectives

- Sections 8.1-8.2
- Introduce the concept of dry friction
- Analyze the equilibrium of rigid bodies subjected to this force

Friction

Friction is a force that resists the movement of two contacting surfaces that slide relative to one another. This force acts tangent to the surface at the points of contact and is directed so as to oppose the possible or existing motion between the surfaces.

Dry Friction (or Coulomb friction) occurs between the contacting surfaces of bodies when there is no lubricating fluid.



Figure: 08_COC

The effective design of each brake on this railroad wheel requires that it resist the frictional forces developed between it and the wheel. In this chapter we will study dry friction, and show how to analyze friction forces for various engineering applications.

Friction

In designing a brake system for a bicycle, car, or any other vehicle, it is important to understand the frictional forces involved.

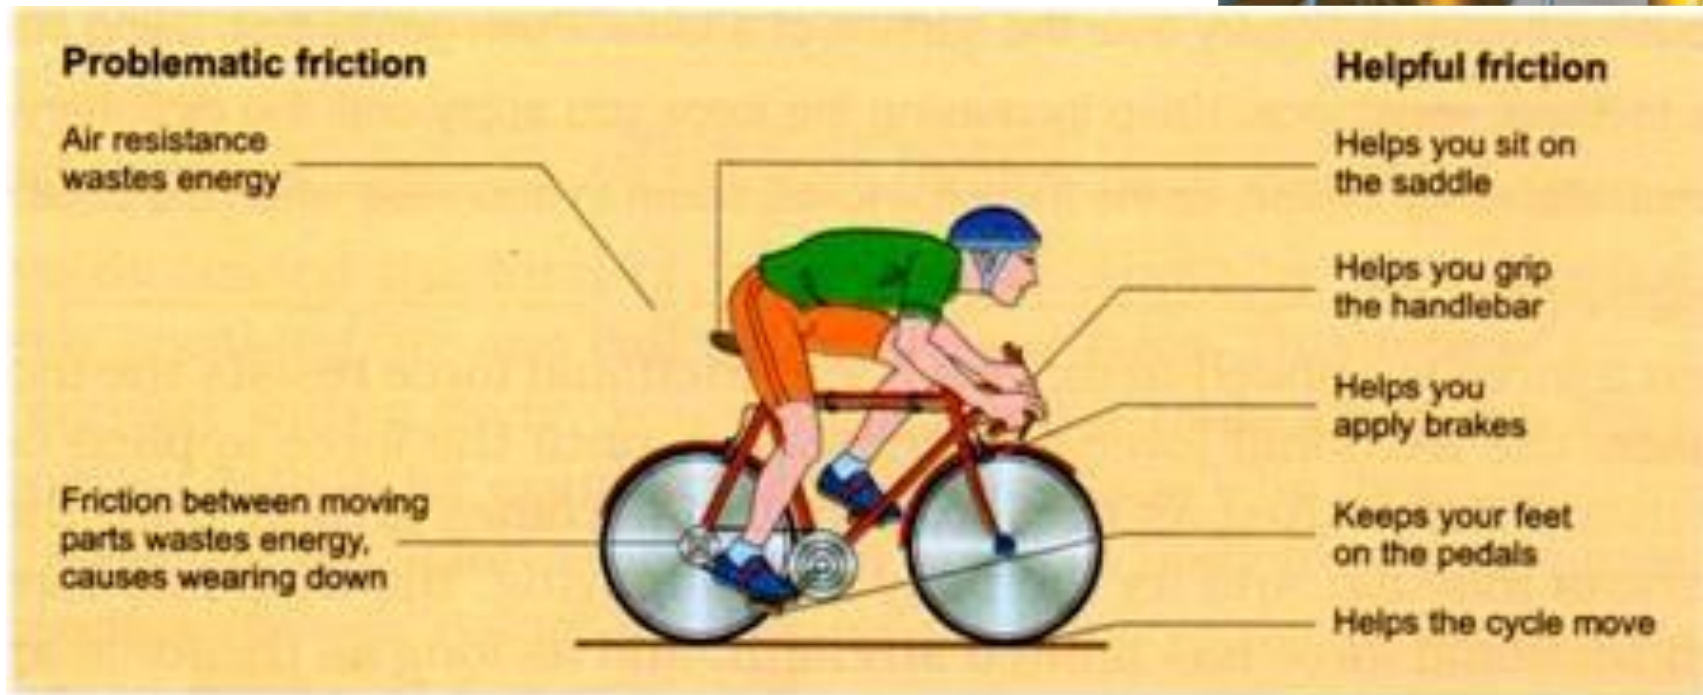





Fig. 8.6 How friction helps and creates problems when you cycle

This is a good link to explain different types of forces:

<http://www.yourarticlelibrary.com/science/4-important-types-of-force-explained-with-diagram/31675>

Dry friction

- Consider the effects of pulling horizontally a block of weight W which is resting on a **rough** surface.
- The floor exerts an uneven distribution of normal forces ΔN_n and frictional forces ΔF_n along the contacting surface.
- These distributed loads can be represented by their equivalent resultant normal forces N and frictional forces F

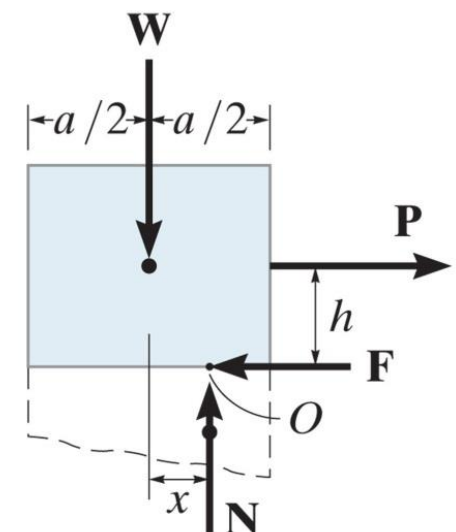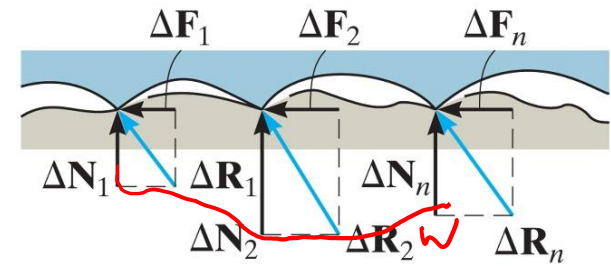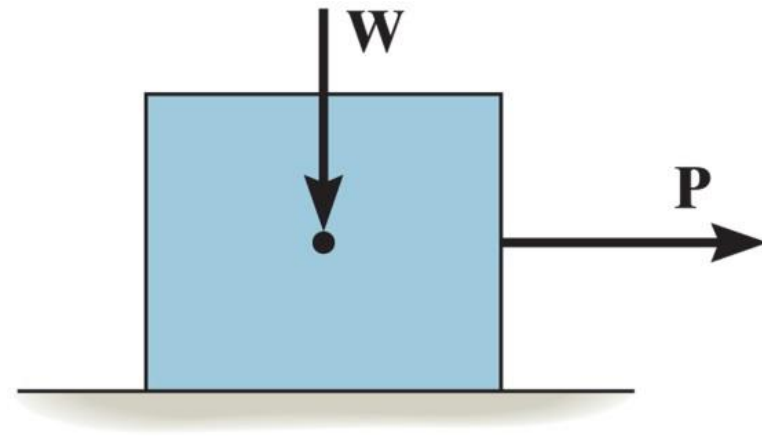

Dry friction


- **Equilibrium:** to avoid tipping of the block, the following equilibrium should be satisfied:

$$\sum M_O = -Ph + Wx = 0 \rightarrow x = \frac{Ph}{W}$$

- **Impending motion:** the maximum force F_s before slipping begins is given by

$$F_s = \mu_s N$$

where μ_s is called the coefficient of static friction

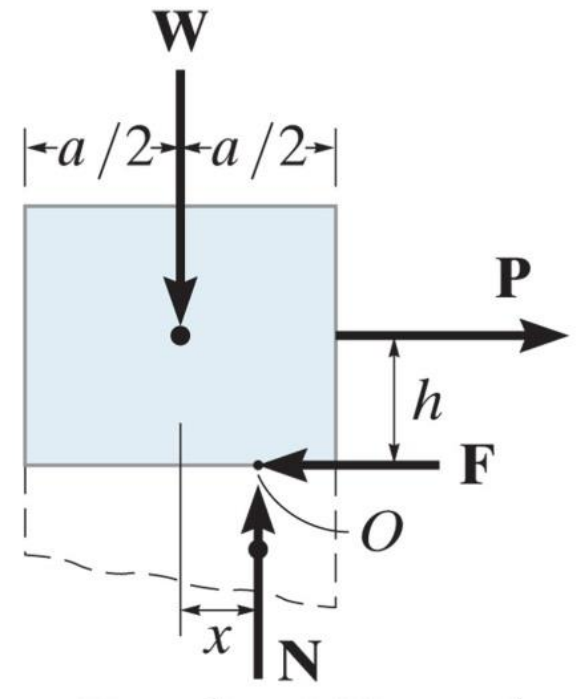

1. $P = 0 \rightarrow$ no motion; no friction
2. $P < F_s \Rightarrow P < \mu_s W \rightarrow$ no motion; friction force $|F| = |P|$
3. $P = F_s = \mu_s W \rightarrow$ no motion, but on the point of sliding
4. $P > F_s \rightarrow$ box begins to slide, since $\sum F_x > 0$

When $P > F_s$, the frictional force is no longer a function of the coefficient of static friction, but instead it will drop to a smaller value F_k , i.e.,

$$F_k = \mu_k N$$

where μ_k is called the coefficient of kinetic friction, or dynamic friction. Typical values for μ_k are approximately 25% smaller than the ones for μ_s .



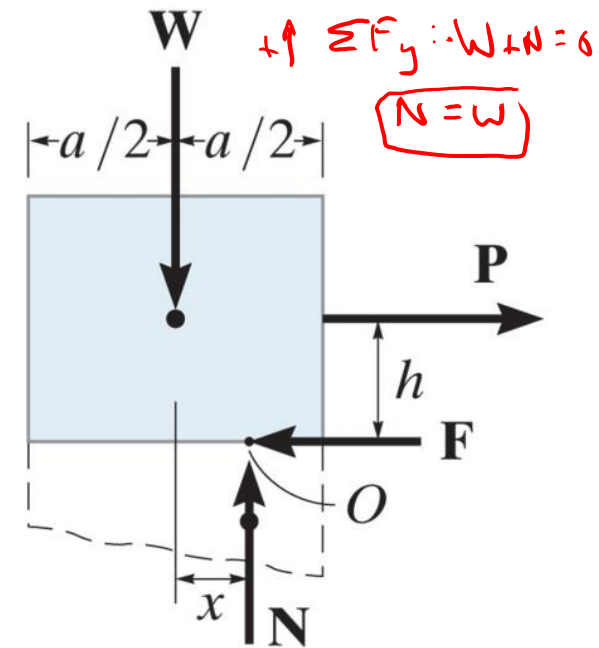



Table 8–1 Typical Values for μ_s


Contact Materials	Coefficient of Static Friction (μ_s)
Metal on ice	0.03–0.05
Wood on wood	0.30–0.70
Leather on wood	0.20–0.50
Leather on metal	0.30–0.60
Aluminum on aluminum	1.10–1.70

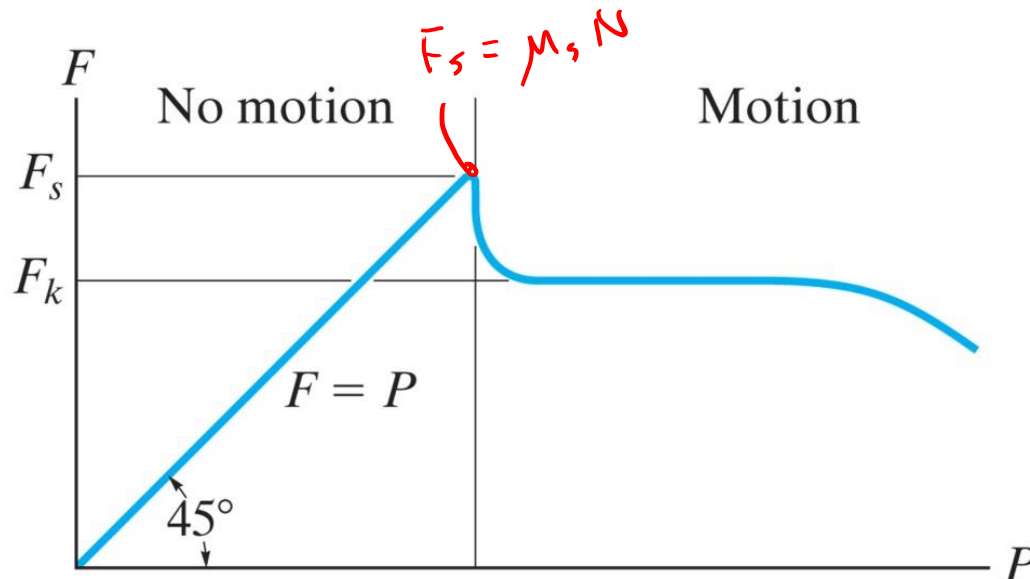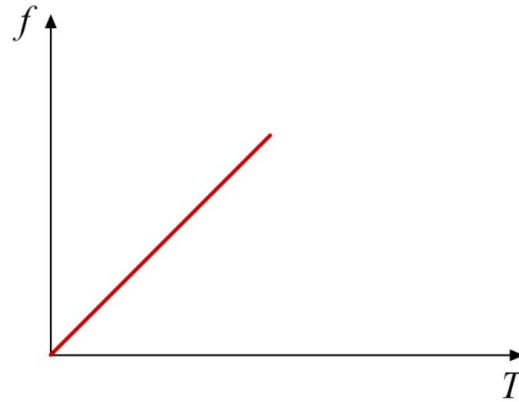

Before the Box Moves

$$T - f = 0$$

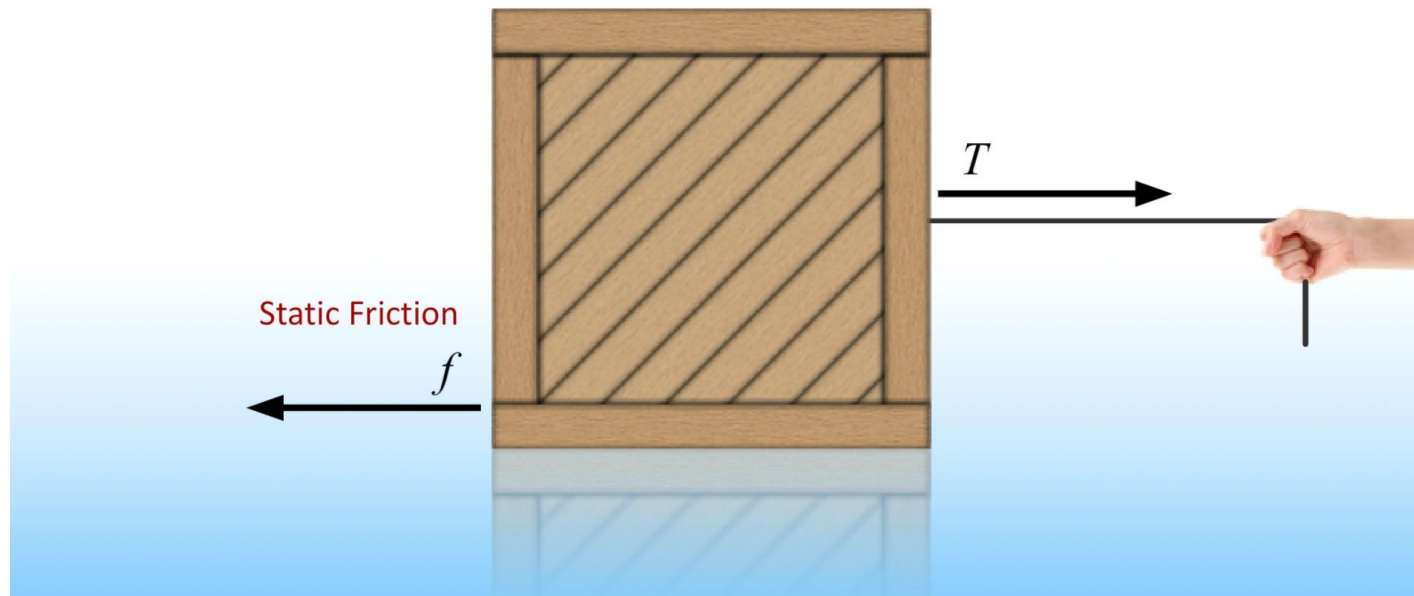

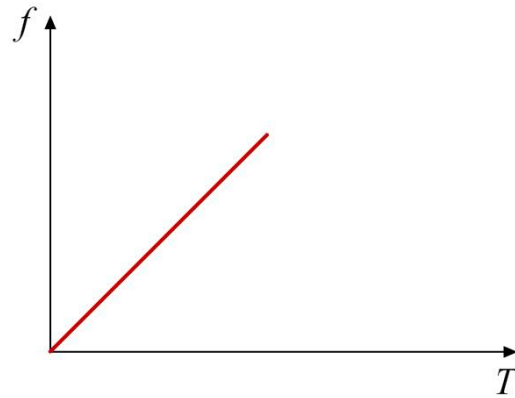


Before the Box Moves


$$T - f = 0$$

Maximum Static Friction

$$f_{max} = \mu_s N$$


Coefficient of
Static Friction

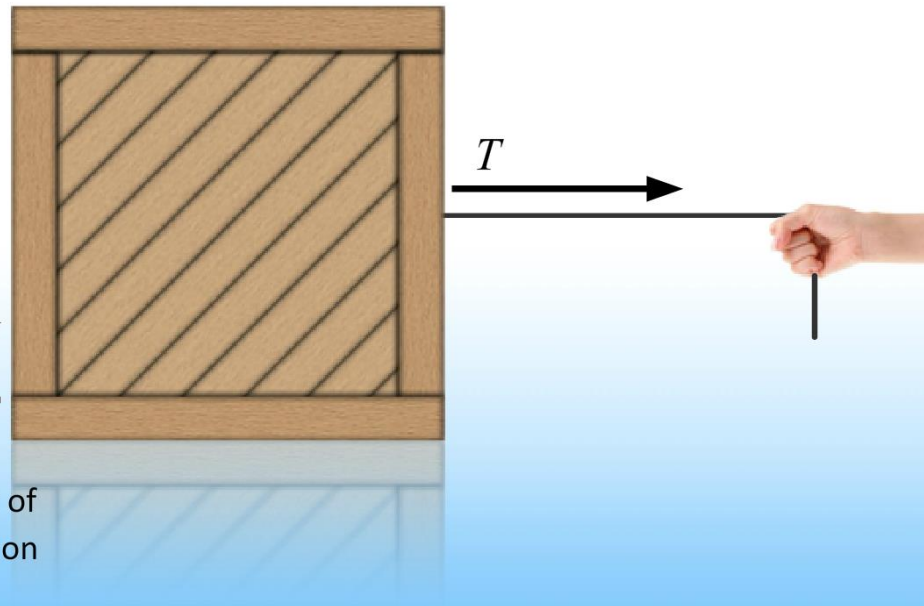

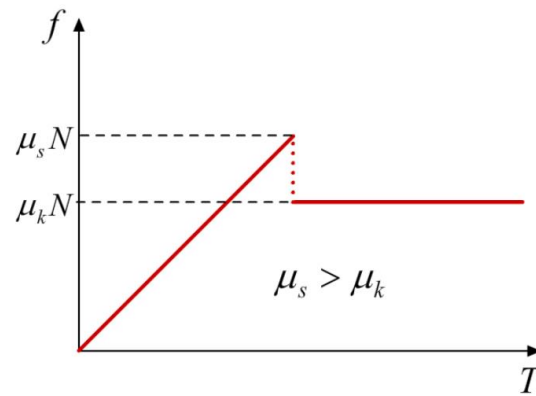

Before the Box Moves

$$T - f = 0$$

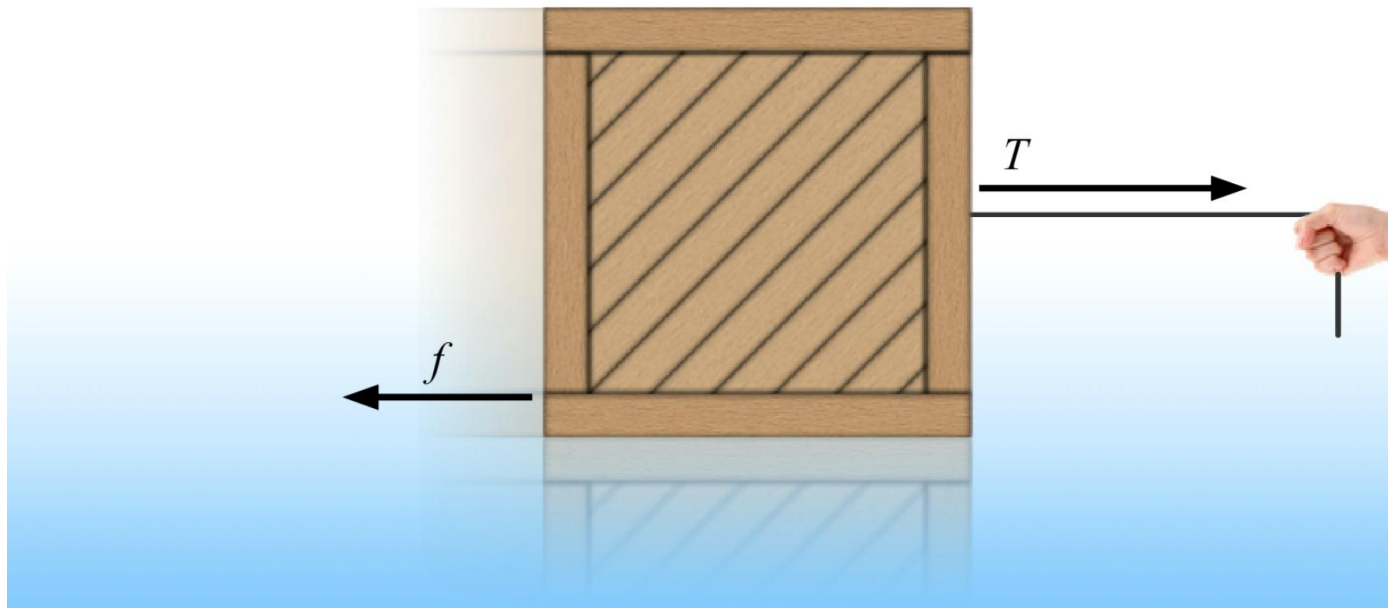

Summary: Dry friction

- Friction acts tangent to contacting surfaces and in a direction opposed to motion of one surface relative to another
- Friction force F is related to the coefficient of friction and normal force N
 - Static friction: $F_s \leq \mu_s N$
 - Kinetic friction: $F_k = \mu_k N$
- Magnitude of coefficient of friction depends on the two contacting materials
- Maximum static frictional force occurs when motion is impending
- Kinetic friction is the tangent force between two bodies after motion begins. Less than static friction by $\sim 25\%$.

Components of a Contact Force

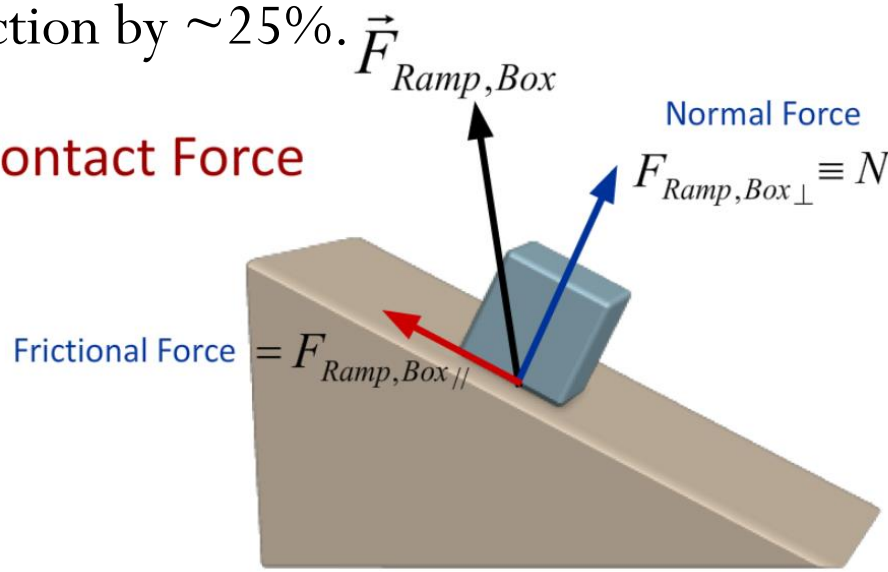


Table 8–1 Typical Values for μ_s	
Contact Materials	Coefficient of Static Friction (μ_s)
Metal on ice	0.03–0.05
Wood on wood	0.30–0.70
Leather on wood	0.20–0.50
Leather on metal	0.30–0.60
Aluminum on aluminum	1.10–1.70

Have a great Spring Break!


what are other
words for
staycation?




break, vacation, holiday,
time off, leave, spring break,
getaway, rest, respite, recess



It is observed that when the bed of the dump truck is raised to an angle of $\theta = 25^\circ$ the vending machines will begin to slide off the bed. Determine the static coefficient of friction between a vending machine and the surface of the truck bed.

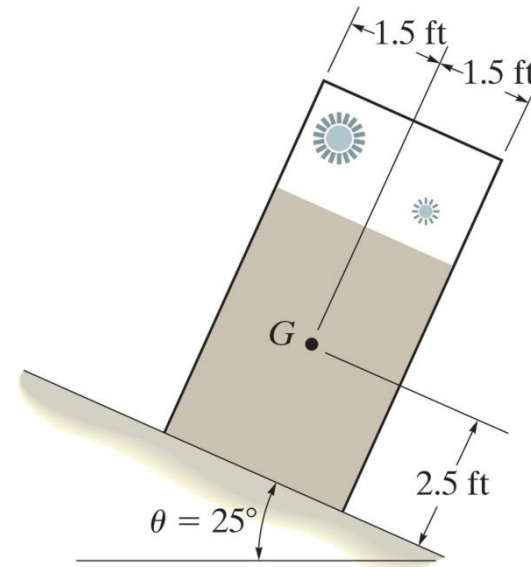

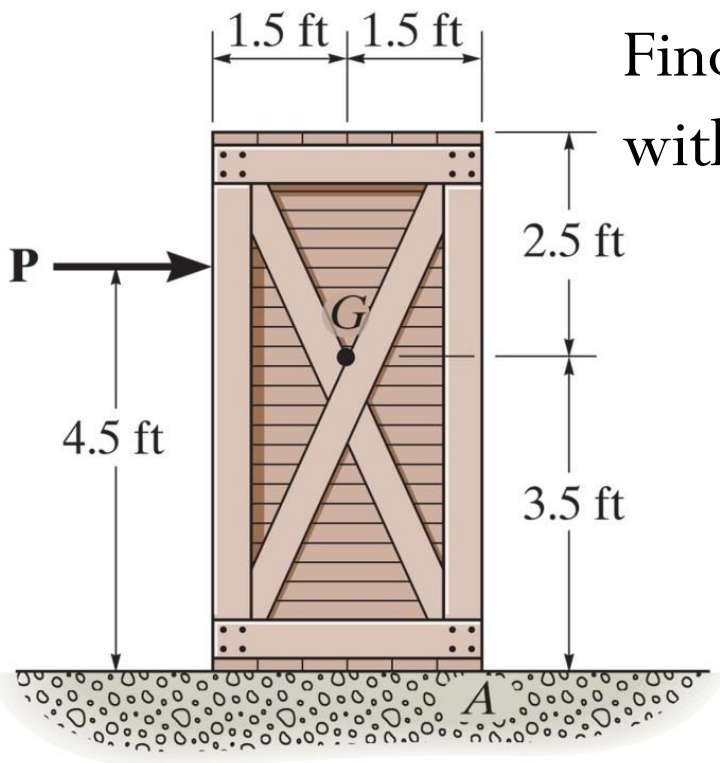

Find the maximum force P that can be applied without causing movement of the crate.