

Statics - TAM 211

Lecture 32

December 12, 2018

Chap 10.1, 10.2, 10.4, 10.8

Announcements

- ❑ Check ALL of your grades on Blackboard! Report issues
- Prof. H-W office hours
 - Monday 3-5pm (Room C315 ZJUI Building)
 - Wednesday 7-8pm (Residential College Lobby)
- ❑ Upcoming deadlines:
 - Friday (12/14)
 - Written Assignment 12
 - Friday (12/14) all in Teaching Building A418-420
 - 9:00 am: Quiz 6, On paper. Chapter 9 (CoG thru Fluid Pressure)
 - 10:00 am: Discussion section for ALL students
 - No lecture to accommodate quiz 6 testing time
 - Tuesday (12/18)
 - HW 13

Chapter 10: Moments of Inertia

Goals and Objectives

- Understand the term “moment” as used in this chapter
- Determine and know the differences between
 - First/second moment of area
 - Moment of inertia for an area
 - Polar moment of inertia
 - Mass moment of inertia
- Introduce the parallel-axis theorem.
- Be able to compute the moments of inertia of composite areas.

Recap: Area moment of inertia (Second moment of area)

- The moment of inertia of the area A with respect to the x -axis is given by

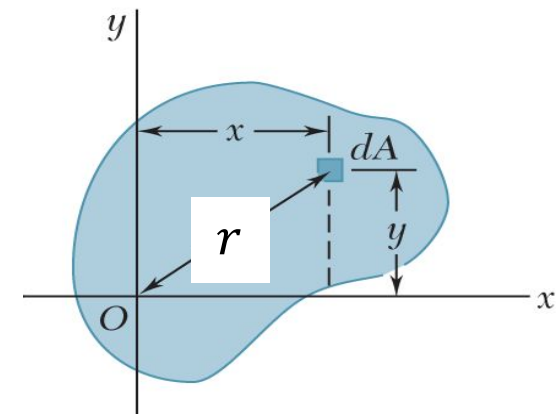
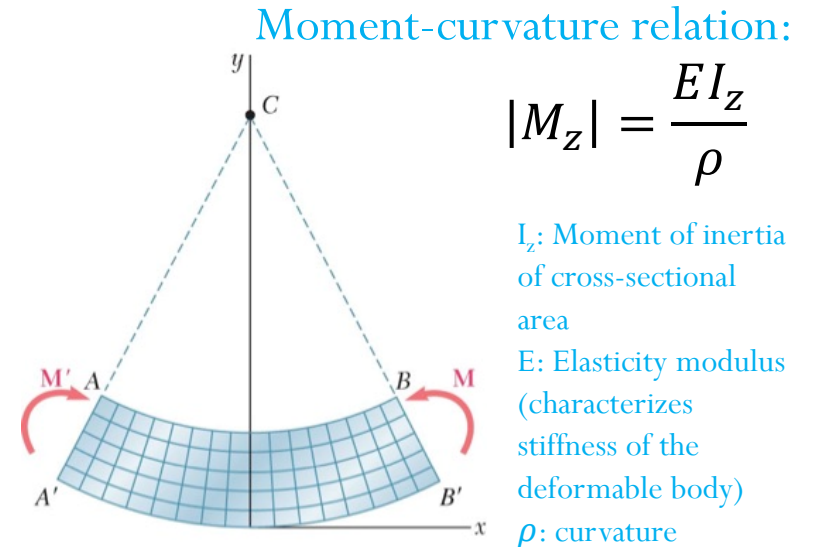
$$I_x = \int_A y^2 dA$$

- The moment of inertia of the area A with respect to the y -axis is given by

$$I_y = \int_A x^2 dA$$













- The moment of inertia of the area A with respect to the origin O is given by (Polar moment of inertia)

$$J_O = \int_A r^2 dA = \int_A (x^2 + y^2) dA = I_y + I_x$$



Geometric Properties of Line and Area Elements

From inside back cover of Hibler textbook

Centroid Location	Centroid Location	Area Moment of Inertia
 <p>Circular arc segment</p>	 <p>Circular sector area</p>	$I_x = \frac{1}{4} r^4 (\theta - \frac{1}{2} \sin 2\theta)$ $I_y = \frac{1}{4} r^4 (\theta + \frac{1}{2} \sin 2\theta)$
 <p>Quarter and semicircle arcs</p>	 <p>Quarter circle area</p>	$I_x = \frac{1}{16} \pi r^4$ $I_y = \frac{1}{16} \pi r^4$
 <p>Trapezoidal area</p>	 <p>Semicircular area</p>	$I_x = \frac{1}{8} \pi r^4$ $I_y = \frac{1}{8} \pi r^4$
 <p>Semiparabolic area</p>	 <p>Circular area</p>	$I_x = \frac{1}{4} \pi r^4$ $I_y = \frac{1}{4} \pi r^4$
 <p>Exparabolic area</p>	 <p>Rectangular area</p>	$I_x = \frac{1}{12} bh^3$ $I_y = \frac{1}{12} hb^3$
 <p>Parabolic area</p>	 <p>Triangular area</p>	$I_x = \frac{1}{36} bh^3$

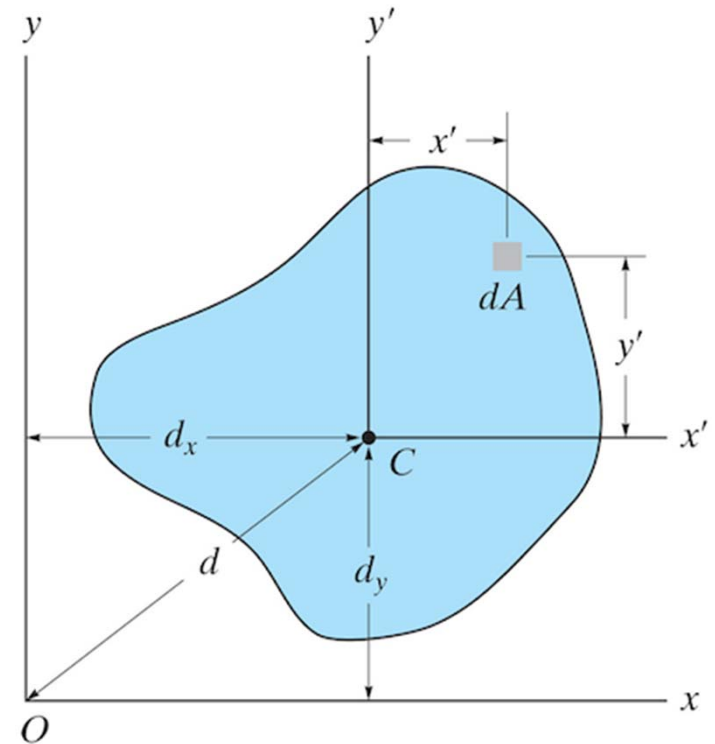
Recap: Parallel axis theorem

- Often, the **moment of inertia** of an area is known for an axis passing through the **centroid**; e.g., x' and y' :
- The moments around other axes can be computed from the known $I_{x'}$ and $I_{y'}$:

$$I_x = I_{x'} + Ad_y^2$$

$$I_y = I_{y'} + Ad_x^2$$

$$J_O = J_C + A(d_x^2 + d_y^2) = J_C + Ad^2$$




Note: the integral over y' gives zero *when done through the centroid axis.*


Recap: Moment of inertia of composite

- If individual bodies making up a **composite** body have individual areas A and moments of inertia I computed through a common axis, then the **composite area** and **moment of inertia** is a sum of the individual component contributions about the axis

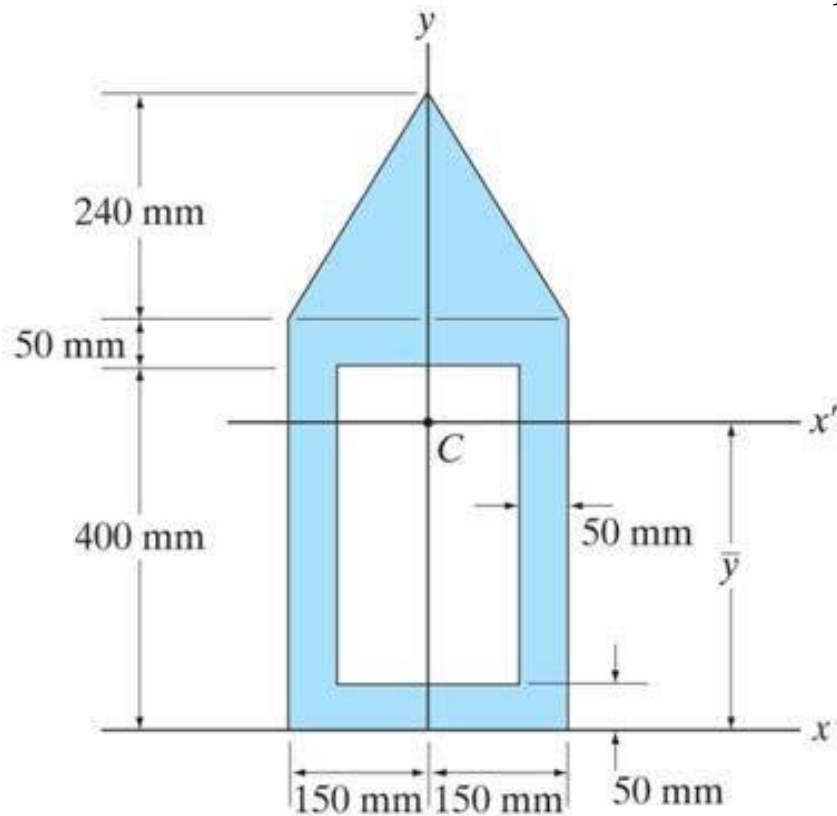
This requires the **parallel axis theorem**:




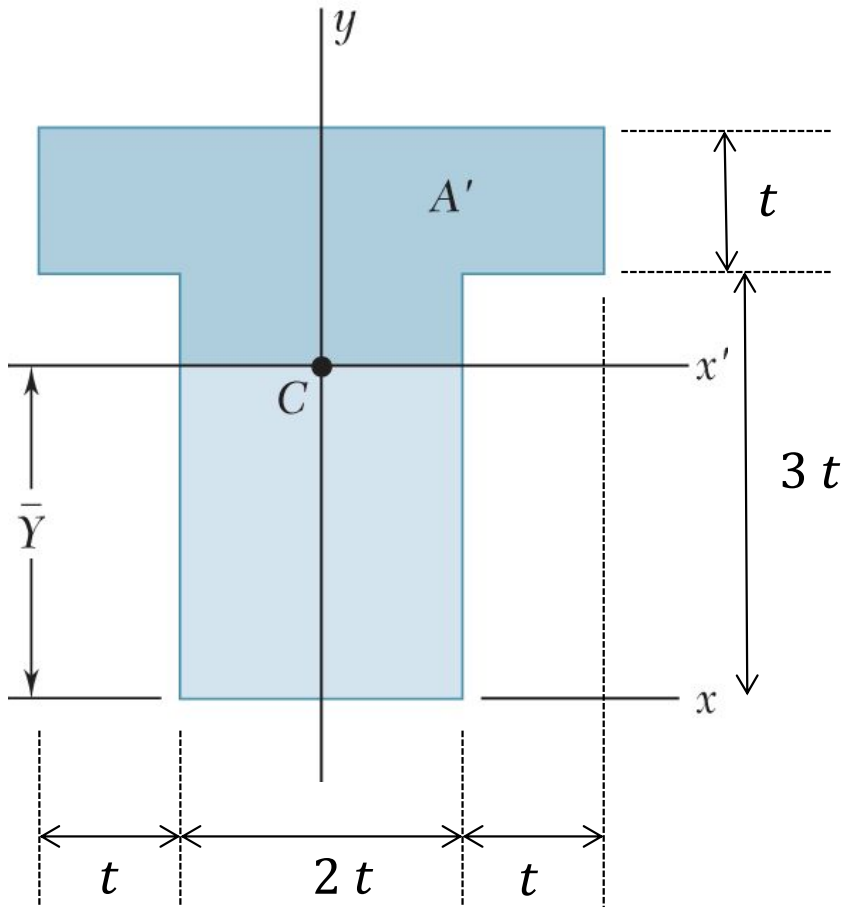Find the moment of inertia of the shape about its centroid:



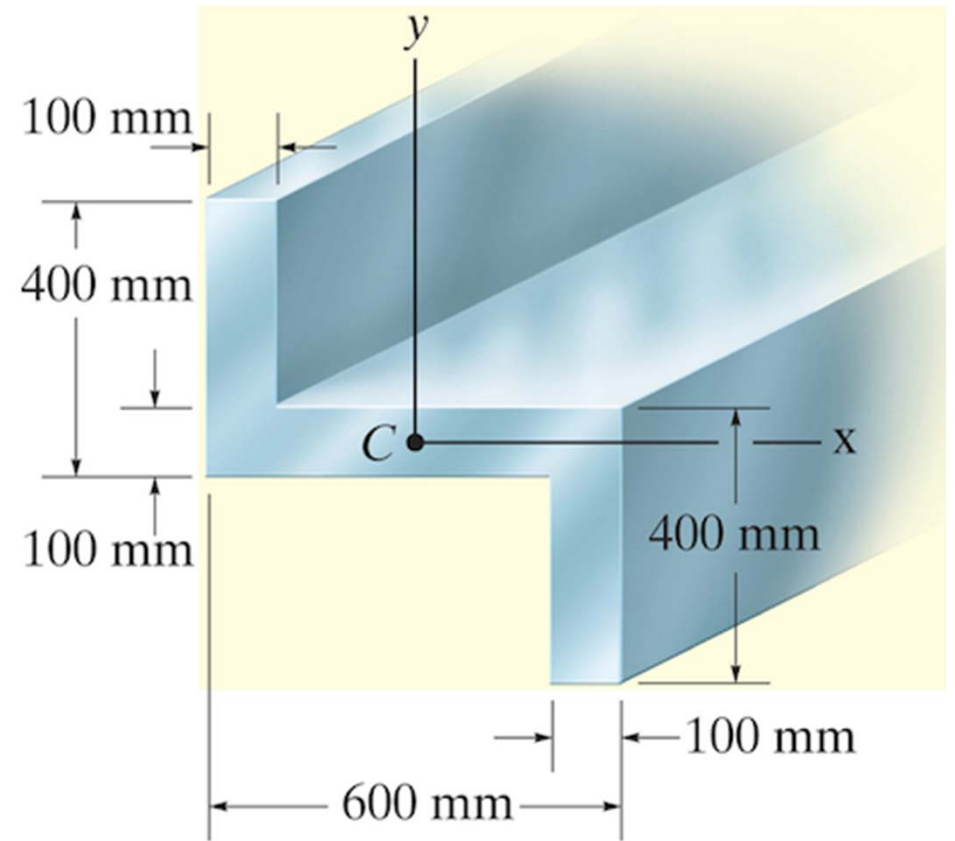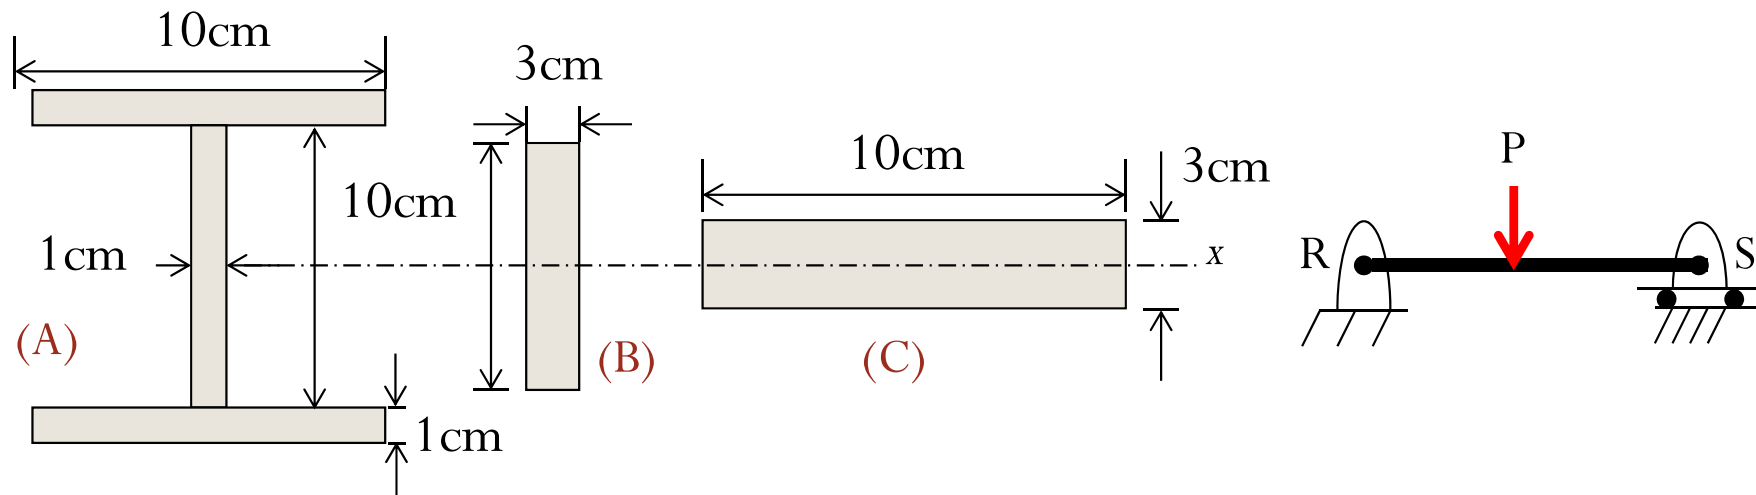Determine the moment of inertia for the cross-sectional area about the x and y centroidal axes.













Consider three different possible cross sectional shapes and areas for the beam RS. For the given vertical loading P on the beam, which shape will develop less internal stress and deflection?



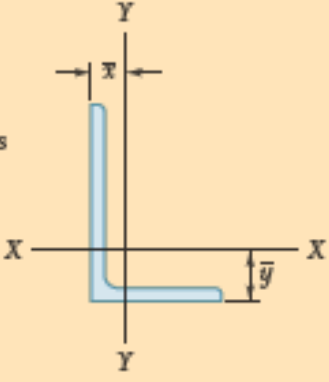
English units (inches)

	Designation	Area in ²	Depth in.	Width in.	Axis X-X			Axis Y-Y		
					\bar{I}_x , in ⁴	\bar{k}_x , in.	\bar{y} , in.	\bar{I}_y , in ⁴	\bar{k}_y , in.	\bar{x} , in.
W Shapes (Wide-Flange Shapes) 	W18 × 76†	22.3	18.2	11.0	1330	7.73	152	2.61		
	W16 × 57	16.8	16.4	7.12	758	6.72	43.1	1.60		
	W14 × 38	11.2	14.1	6.77	385	5.87	26.7	1.55		
	W8 × 31	9.12	8.00	8.00	110	3.47	37.1	2.02		
S Shapes (American Standard Shapes) 	S18 × 54.7†	16.0	18.0	6.00	801	7.07	20.7	1.14		
	S12 × 31.8	9.31	12.0	5.00	217	4.83	9.33	1.00		
	S10 × 25.4	7.45	10.0	4.66	123	4.07	6.73	0.950		
	S6 × 12.5	3.66	6.00	3.33	22.0	2.45	1.80	0.702		
C Shapes (American Standard Channels) 	C12 × 20.7†	6.08	12.0	2.94	129	4.61	3.86	0.797	0.698	
	C10 × 15.3	4.48	10.0	2.60	67.3	3.87	2.27	0.711	0.634	
	C8 × 11.5	3.37	8.00	2.26	32.5	3.11	1.31	0.623	0.572	
	C6 × 8.2	2.39	6.00	1.92	13.1	2.34	0.657	0.536	0.512	
Angles 	L6 × 6 × 1†	11.0			35.4	1.79	1.86	35.4	1.79	1.86
	L4 × 4 × 1/2	3.75			5.52	1.21	1.18	5.52	1.21	1.18
	L3 × 3 × 1/4	1.44			1.23	0.926	0.836	1.23	0.926	0.836
	L6 × 4 × 1/2	4.75			17.3	1.91	1.98	6.22	1.14	0.981
	L5 × 3 × 1/2	3.75			9.43	1.58	1.74	2.55	0.824	0.746
	L3 × 2 × 1/4	1.19			1.09	0.953	0.980	0.390	0.569	0.487

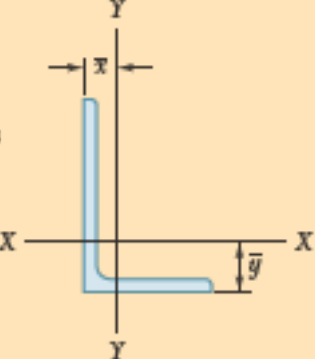Metric units (mm)



	Designation	Area mm ²	Depth mm	Width mm	Axis X-X			Axis Y-Y		
					\bar{I}_x 10 ⁶ mm ⁴	\bar{k}_x mm	\bar{y} mm	\bar{I}_y 10 ⁶ mm ⁴	\bar{k}_y mm	\bar{x} mm
W Shapes (Wide-Flange Shapes) 	W460 × 113†	14400	462	279	554	196		63.3	66.3	
	W410 × 85	10900	417	181	316	171		17.9	40.6	
	W360 × 57.8	7230	358	172	160	149		11.1	39.4	
	W200 × 46.1	5890	203	203	45.8	88.1		15.4	51.3	
S Shapes (American Standard Shapes) 	S460 × 81.4†	10300	457	152	333	180		8.62	29.0	
	S310 × 47.3	6010	305	127	90.3	123		3.88	25.4	
	S250 × 37.8	4810	254	118	51.2	103		2.80	24.1	
	S150 × 18.6	2360	152	84.6	9.16	62.2		0.749	17.8	
C Shapes (American Standard Channels) 	C310 × 30.8†	3920	305	74.7	53.7	117		1.61	20.2	17.7
	C250 × 22.8	2590	254	66.0	28.0	98.3		0.945	18.1	16.1
	C200 × 17.1	2170	203	57.4	13.5	79.0		0.545	15.8	14.5
	C150 × 12.2	1540	152	48.8	5.45	59.4		0.286	13.6	13.0
Angles 	L152 × 152 × 25.4†	7100			14.7	45.5	47.2	14.7	45.5	47.2
	L102 × 102 × 12.7	2420			2.30	30.7	30.0	2.30	30.7	30.0
	L76 × 76 × 6.4	929			0.512	23.5	21.2	0.512	23.5	21.2
	L152 × 102 × 12.7	3060			7.20	48.5	50.3	2.59	29.0	24.9
	L127 × 76 × 12.7	2420			3.93	40.1	44.2	1.06	20.9	18.9
	L76 × 51 × 6.4	768			0.454	24.2	24.9	0.162	14.5	12.4

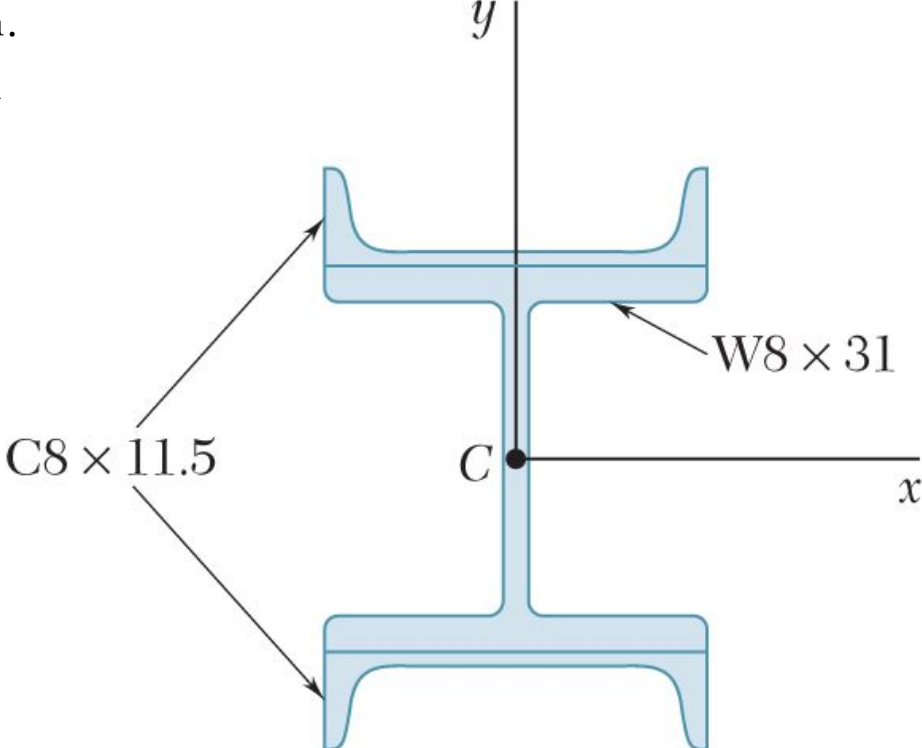Two channels are welded to a rolled W section as shown. Determine the area moments of inertia of the combined section with respect to the centroidal x and y axes.



Mass Moment of Inertia

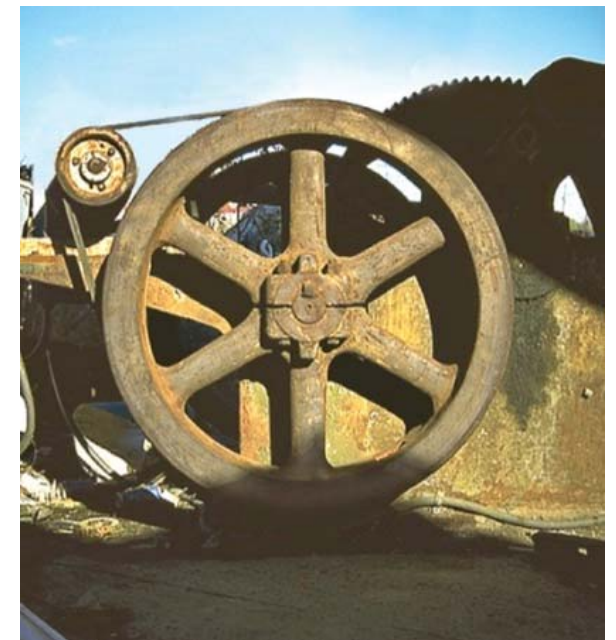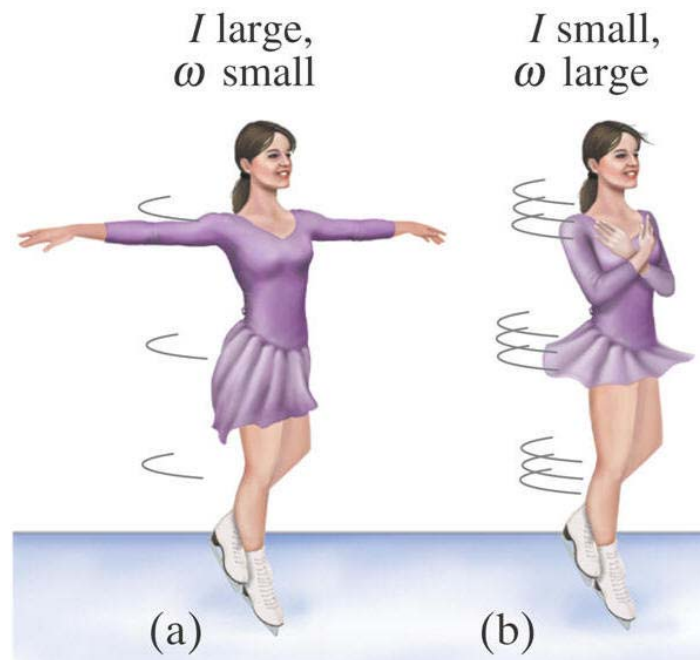- **Mass moment of inertia** is the mass property of a rigid body that determines the torque T needed for a desired angular acceleration (α) about an axis of rotation.
- A larger mass moment of inertia around a given axis requires more torque to increase the rotation, or to stop the rotation, of a body about that axis
- Mass moment of inertia depends on the shape and density of the body and is different around different axes of rotation.



Mass Moment of Inertia

Torque-acceleration relation: $T = I \alpha$

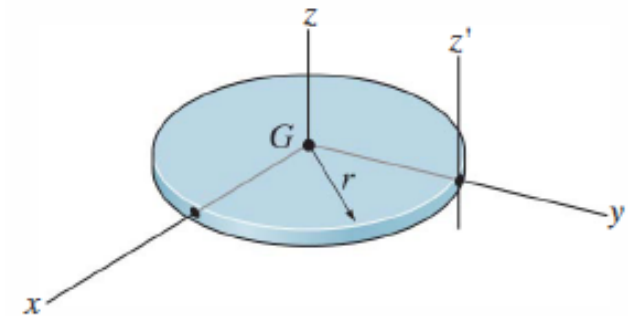

where the mass moment of inertia is defined as

$$I_{zz} = \int \rho r^2 dV$$

If $\rho = \text{constant}$, $I_{zz} = \int r^2 dm$


Mass moment of inertia for a disk:

$$\begin{aligned} I_{zz} &= \int \rho r^2 dv = \int_0^t \int_0^{2\pi} \int_0^R \rho r^2 (r dr d\theta dz) \\ &= \rho \int_0^t \int_0^{2\pi} \frac{r^4}{4} d\theta dz \\ &= \rho \int_0^t \frac{r^4}{2} \pi dz = \rho \frac{r^4}{2} \pi t = \frac{r^2}{2} \rho \pi r^2 t = \frac{r^2}{2} \rho V = \frac{r^2}{2} M \end{aligned}$$



Thin Circular disk
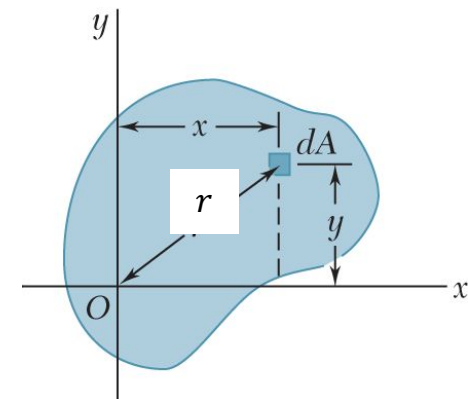
$$I_{xx} = I_{yy} = \frac{1}{4} mr^2 \quad I_{zz} = \frac{1}{2} mr^2 \quad I_{z'z'} = \frac{3}{2} mr^2$$



Center of Gravity and Mass Moment of Inertia of Homogeneous Solids

From inside back cover of Hibbler textbook

