Data Structures

Traversals 2 and Minimum Spanning Tree

CS 225

November 4, 2026

Brad Solomon



UNIVERSITY OF ILLINOIS URBANA-CHAMPAIGN

Department of Computer Science

Learning Objectives

Continue graph traversal algorithms (mostly DFS)

Introduce the minimum spanning tree (with weights)

Introduce Kruskal's / Prim's MST Algorithms


Begin discussing implementation of Kruskal's

Graph Traversals


Objective: Visit every vertex and every edge in the graph.

How can we systematically go through a complex graph in the fewest steps?

Tree traversals won't work — lets compare:




- Rooted
- Acyclic
- **A clear 'endpoint'**



- No root (any start position valid)
- Cycles
- **No obvious 'endpoint'**

```
12 BFS(G, v):
13   Queue q
14   setDist(v, 0)
15   q.enqueue(v)
16
17   while !q.empty():
18     v = q.dequeue()
19
20     foreach (Vertex w : G.adjacent(v)):
21        if( getDist(w) == -1):
22           setLabel((v, w), DISCOVERY)
23           setPred(w, v)
24           setDist(w, v + 1)
25           q.enqueue(w)
26        else:
27           setLabel((v, w), CROSS)
```

v	d	P	Adjacent Edges
A	0	-	B C D
B	1	A	A C E
C	1	A	A B D E F
D	1	A	A C F H
E	2	B	B C G
F	2	C	C D G
G	3	E	E F H
H	2	D	D G

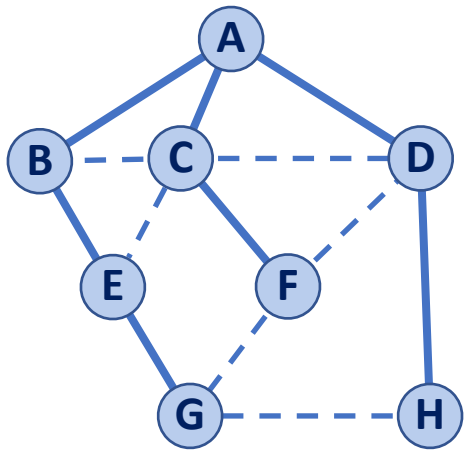




BFS Observations

1. BFS can be used to count components
2. BFS can be used to detect cycles


3. The BFS 'distance' value is always the shortest distance from source to any vertex (and the discovery edges form a MST)

4. The endpoints of a cross edge never differ in distance by more than 1 ($\mathbf{|d(u) - d(v)| = 1}$)

Traversal: DFS

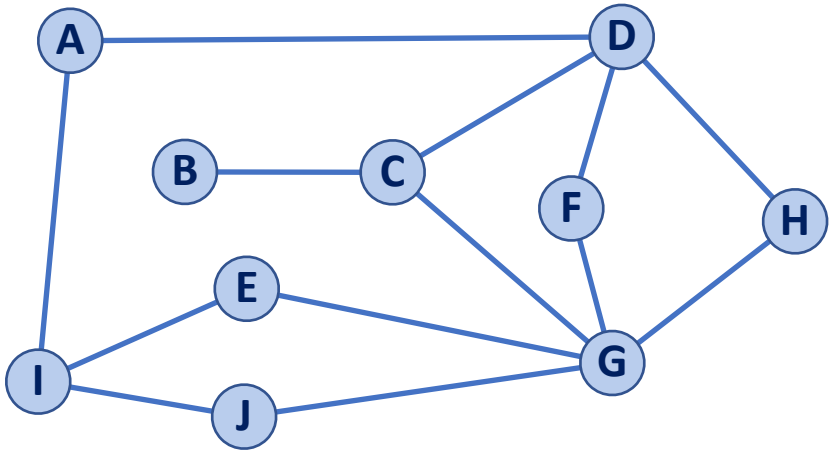

Traversal: DFS

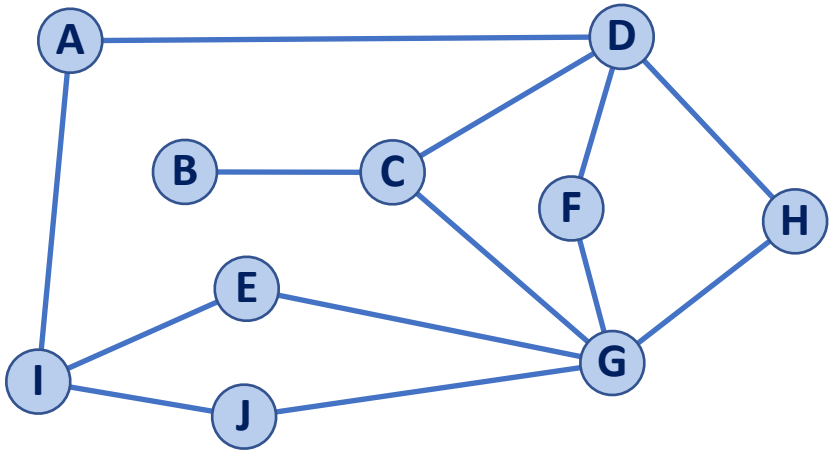

Initialize dist / pred / stack

All dist null (start node dist 0)

All pred -1 (start node pred -1)

Stack loaded with start node

While stack not empty

tmp=stack.peek()

Process one child of tmp

Add to stack

dist = tmp.dist+1

pred = tmp


If no unvisited children

stack.pop()

A


Stack

```
1  DFS(G):
2    foreach (Vertex v : G.vertices()):
3      setPred(v, NULL)
4      setDist(v, -1)
5
6    foreach (Edge e : G.edges()):
7      setLabel(e, UNEXPLORED)
8
9    foreach (Vertex v : G.vertices()):
10     if getDist(v) == -1:
11       DFS(G, v)
```

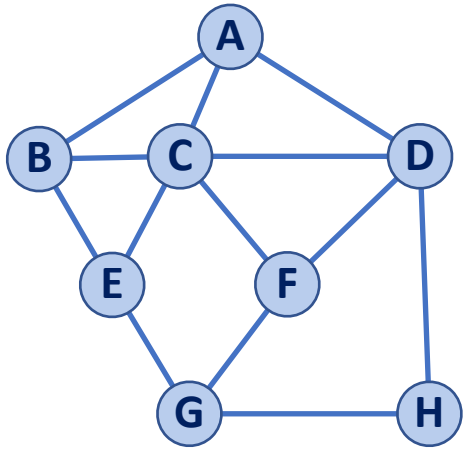


```
12 DFS(G, v):
13
14     foreach (Vertex w : G.adjacent(v)):
15         if( getDist(w) == -1):
16             setLabel((v, w), DISCOVERY)
17             setPred(w, v)
18             setDist(w, v + 1)
19             DFS(G, w)
20         else:
21             setLabel((v, w), BACK)
```

```
12 DFS(G, v):
13
14     foreach (Vertex w : G.adjacent(v)):
15         if( getDist(w) == -1):
16             setLabel((v, w), DISCOVERY)
17             setPred(w, v)
18             setDist(w, v + 1)
19             DFS(G, w)
20         else:
21             setLabel((v, w), BACK)
```

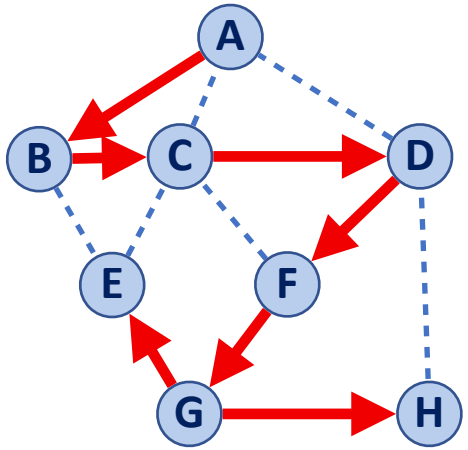


v	d	P	Adjacent Edges
A	0	-	B C D
B	1	A	A C E
C	2	B	A B D E F
D	3	C	A C F H
E	6	G	B C G
F	4	D	C D G
G	5	F	E F H
H	6	G	D G

State of stack when H is added:

H
~~E~~
G
F
D
C
B
A

Traversal: DFS

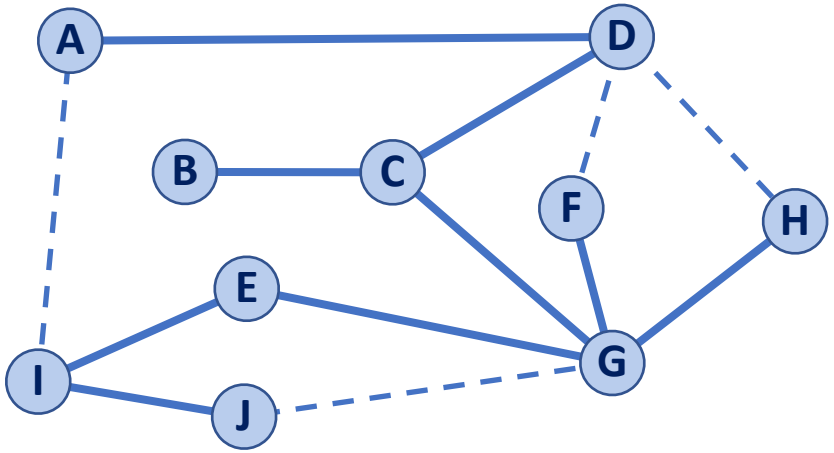

Discovery Edge


Back Edge

Do we still make a spanning tree?

Does distance have meaning here?

Do our edge labels have meaning here?

Running time of DFS

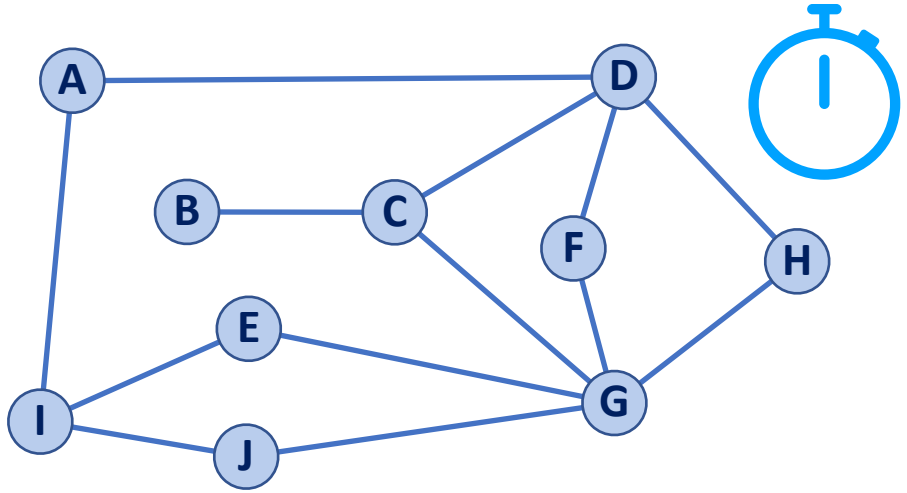

Labeling:

- Vertex:

- Edge:


Traversal:

- Vertex:

- Edge:


Efficiency: DFS vs BFS

BFS:

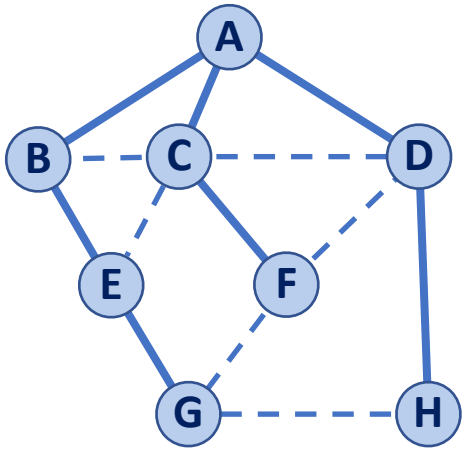


A B C D E F H G

DFS:

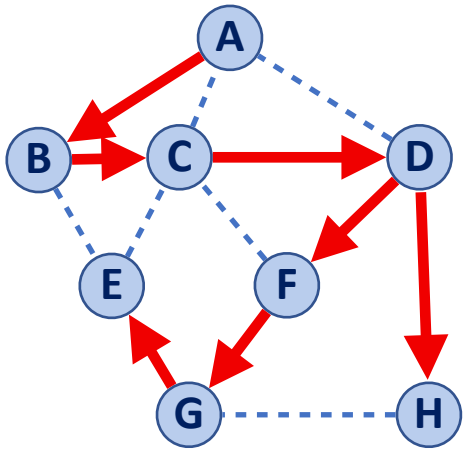

A B C D F G E H

Space Efficiency: DFS vs BFS

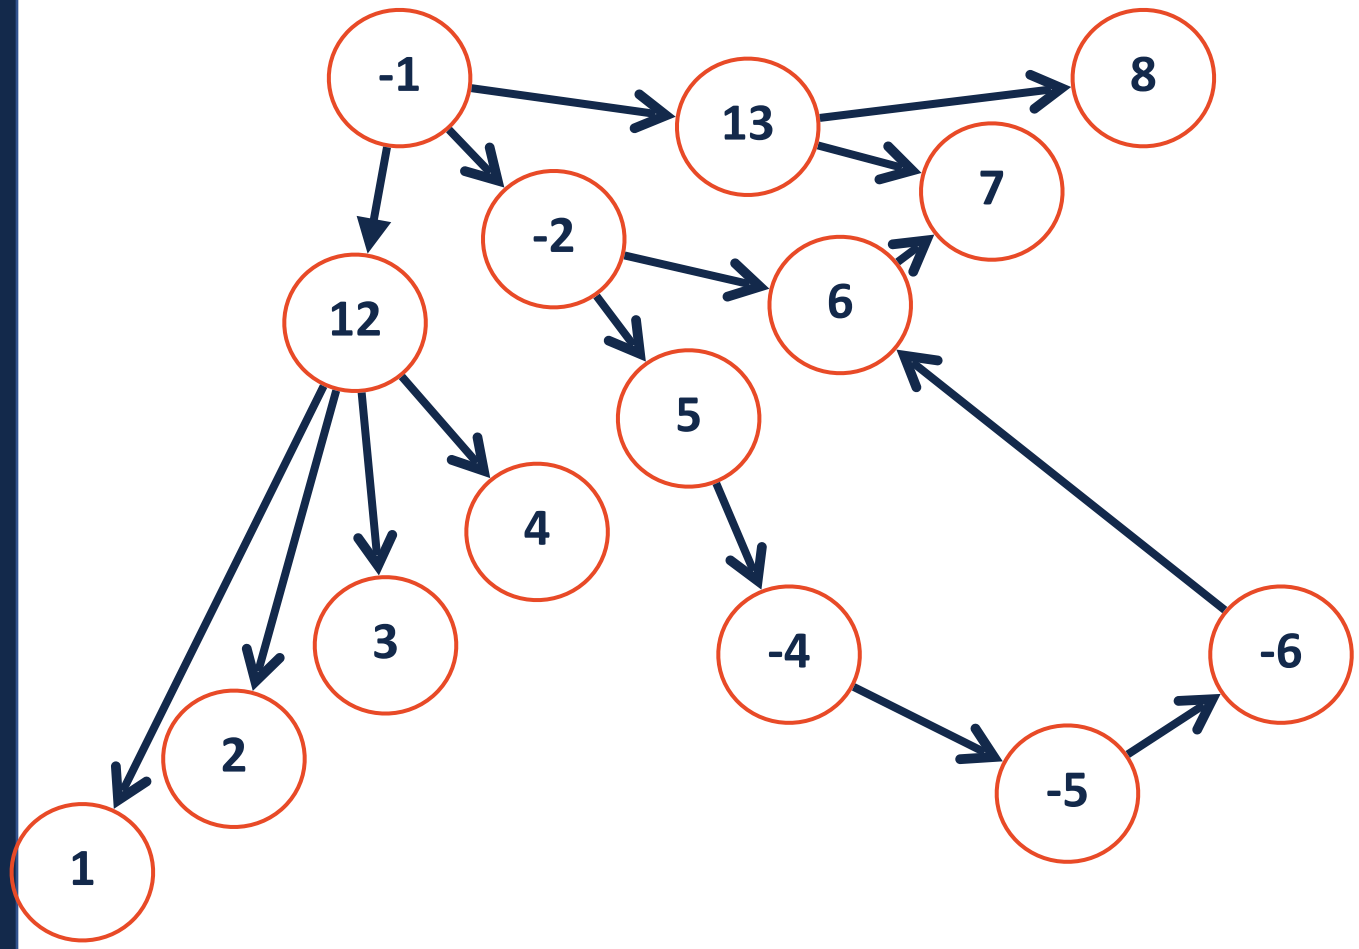

Summary: DFS and BFS

$|V| = n, |E| = m$



Both are **O(n+m)** traversals! They label every edge and every node


BFS	**DFS**
Solves unweighted MST	Solves unweighted MST
Solves shortest path	
Solves cycle detection	Solves cycle detection
Memory bounded by width	Memory bounded by longest path

Minimum Spanning Tree Algorithms

Input: Connected, undirected graph **G** with edge weights (unconstrained, but must be additive)

Output: A graph G’ with the following properties:

- G’ is a spanning graph of G
- G’ is a tree (connected, acyclic)
- G’ has a minimal total weight among all spanning trees

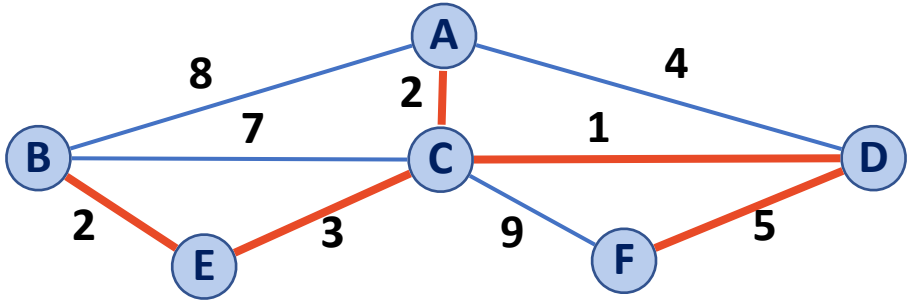

Graph Algorithms: Minimum Spanning Trees



Vojtěch Jarník (1897-1970)

First wrote algorithm for MST

Robert Prim (1921 — 2021)



Rediscovered Jarnik's algorithm


(It's named after Prim now though)



Joseph Kruskal (1928 — 2010)


Worked in Bell Labs with Prim

Came up with his own MST algorithm

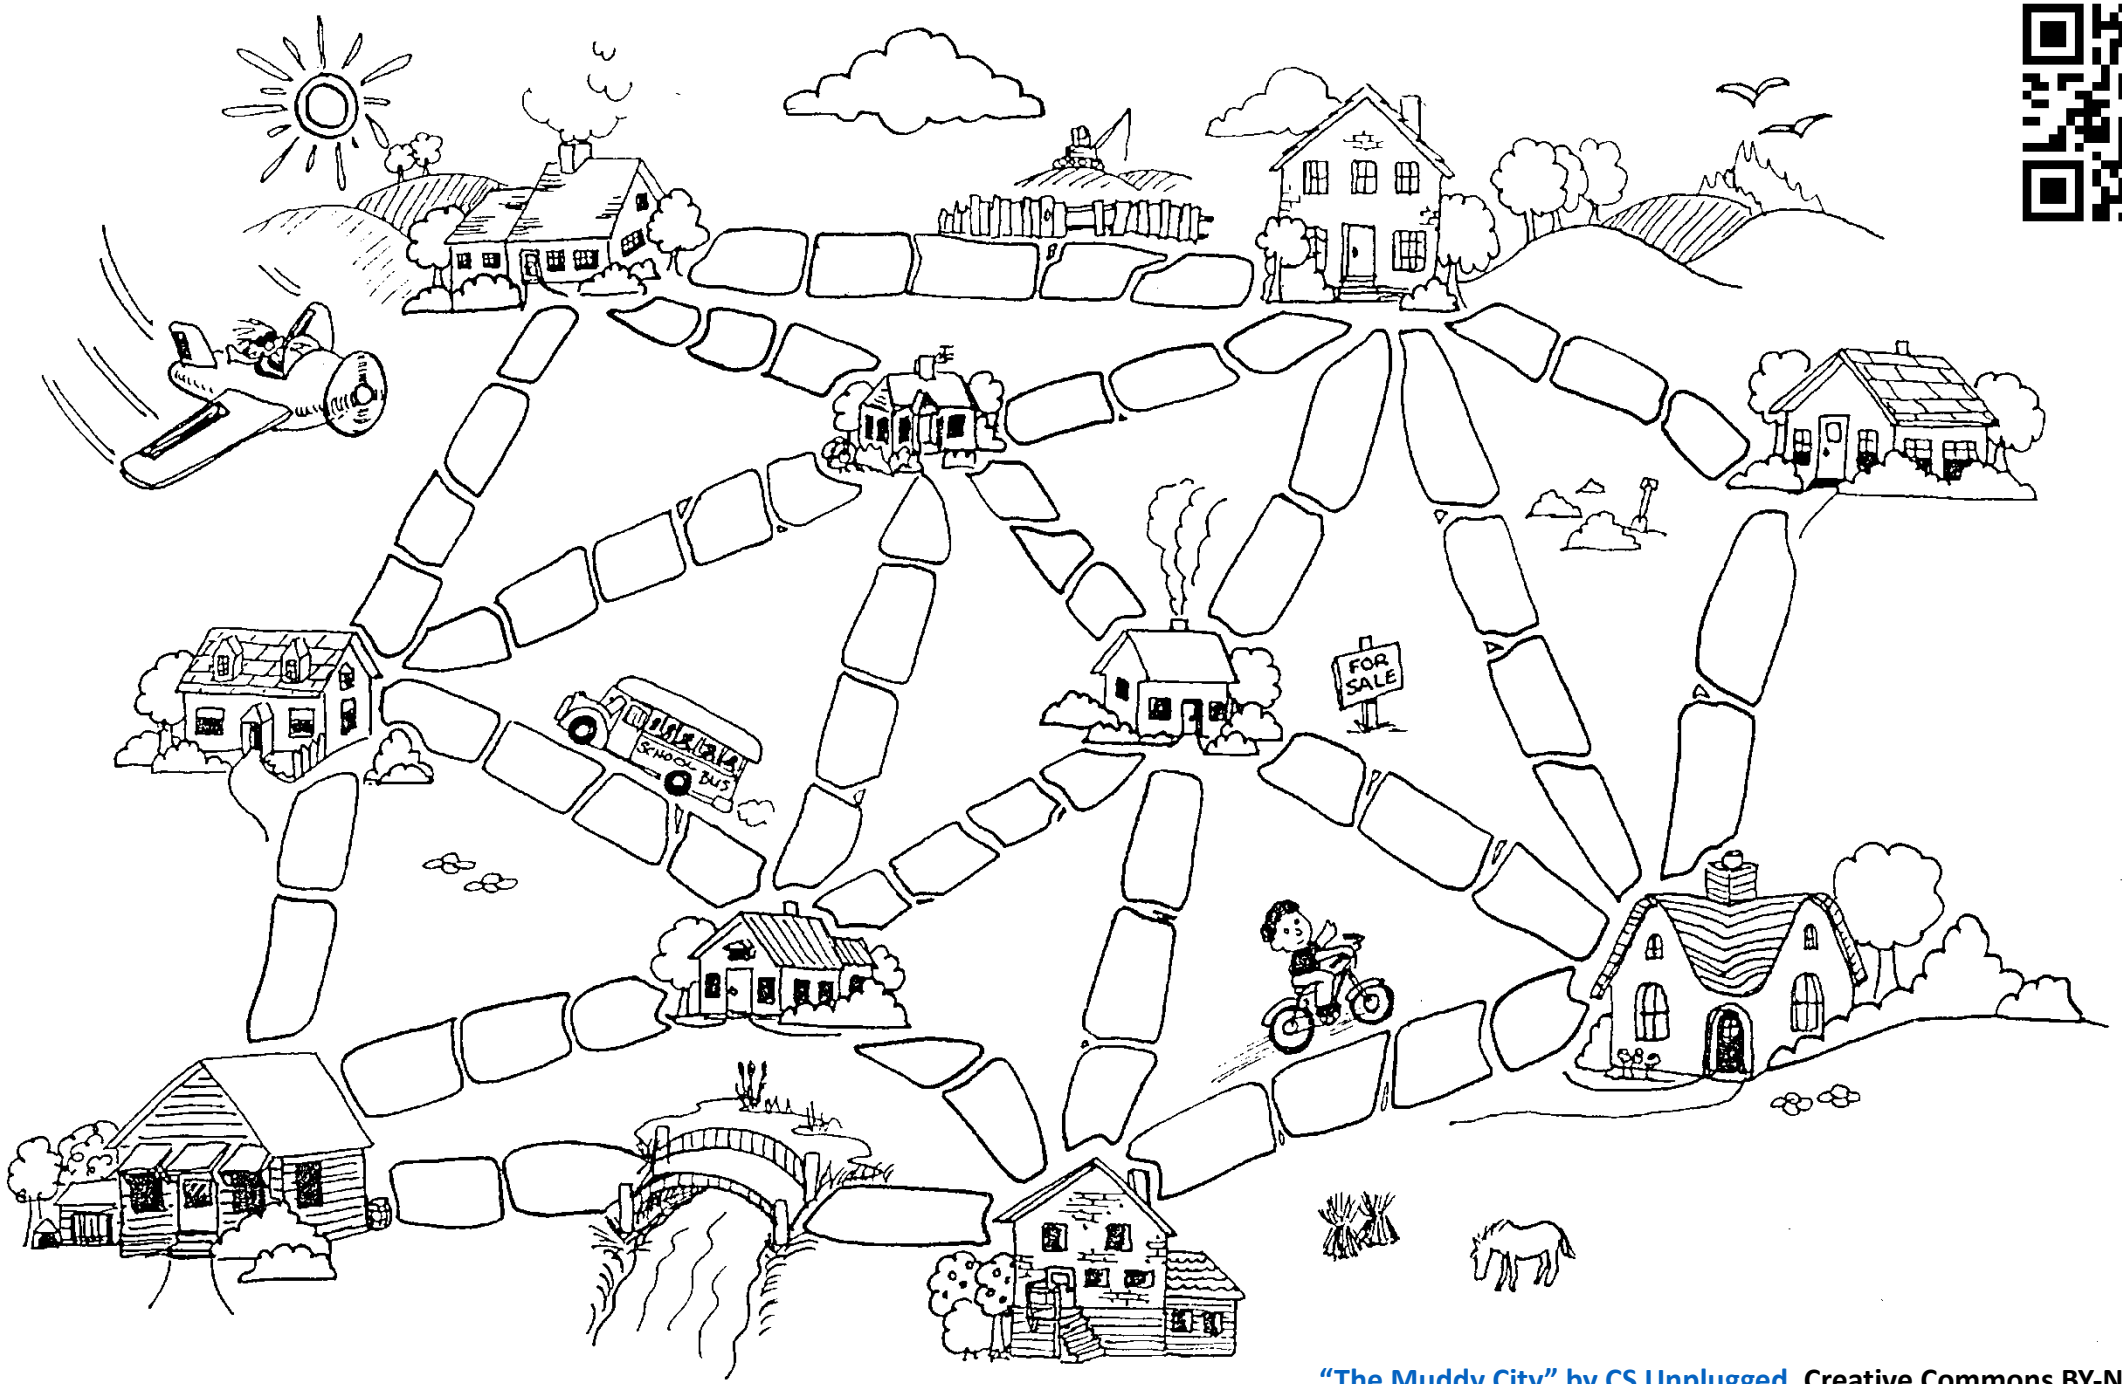

"The Muddy City" by CS Unplugged, Creative Commons BY-NC-SA 4.0

Kruskal's Algorithm *(A graph algorithm for the MST problem)*

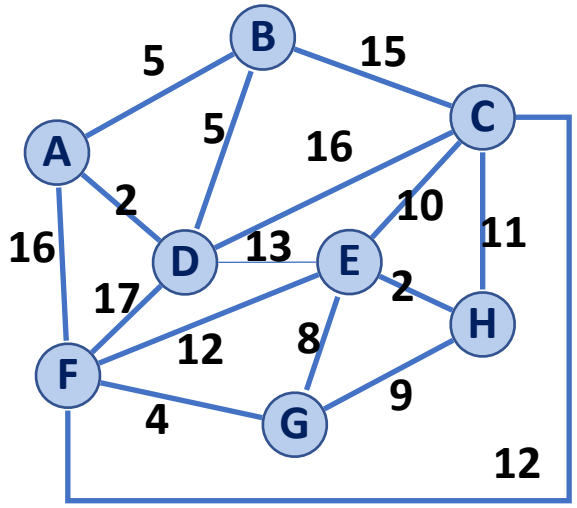

What information do I need to get efficiently?


1) The global minimum edge weight

2) Edge connections for a given vertex

3) If two vertices are already connected

4) A visited list of vertices

Kruskal's Algorithm *(A graph algorithm for the MST problem)*

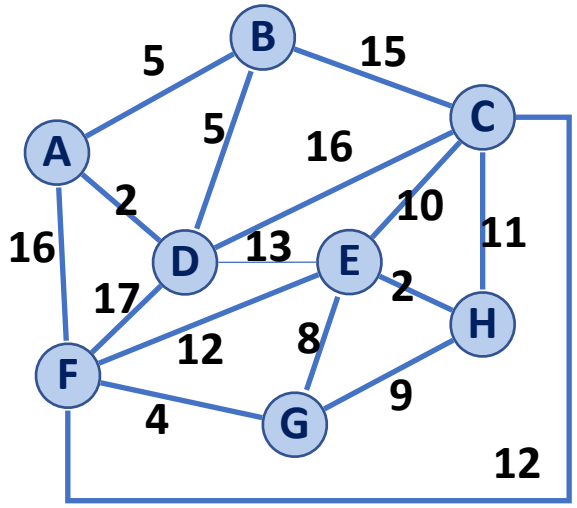


What information do I need to get efficiently?

1) The global minimum edge weight

3) If two vertices are already connected

What does this tell me about my implementation choices?

Kruskal's Algorithm *(A graph algorithm for the MST problem)*

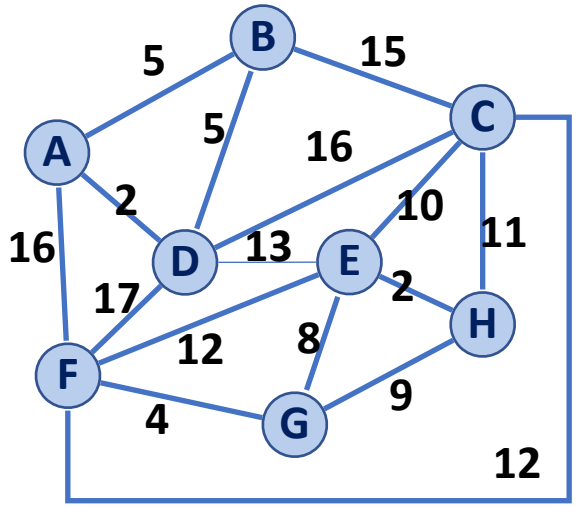

What information do I need to get efficiently?

1) The global minimum edge weight

3) If two vertices are already connected

What does this tell me about my implementation choices?

1) We need a **priority queue** of edges (sorted by weight)


2) We need a **disjoint set** of vertices


Kruskal's Algorithm

1) Build a **priority queue** on edges

2) Build a **disjoint set** on vertices


(A, D)
(E, H)
(F, G)
(A, B)
(B, D)
(G, E)
(G, H)
(E, C)
(C, H)
(E, F)
(F, C)
(D, E)
(B, C)
(C, D)
(A, F)
(D, F)

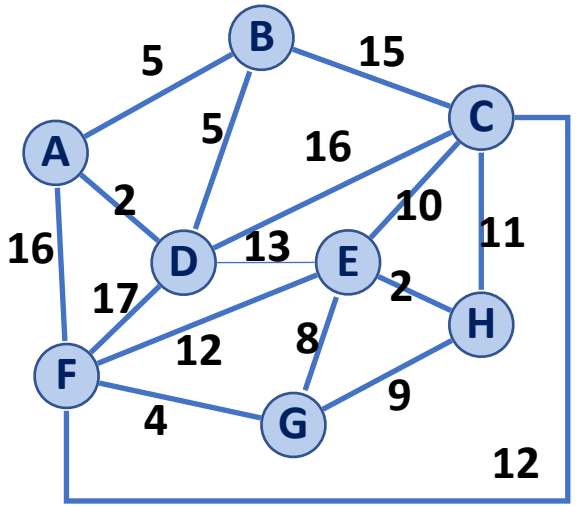


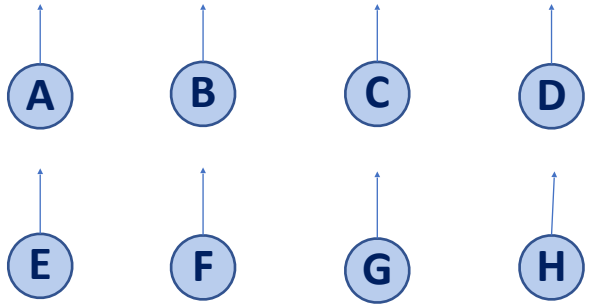

Kruskal's Algorithm

(A, D)
(E, H)
(F, G)
(A, B)
(B, D)
(G, E)
(G, H)
(E, C)
(C, H)
(E, F)
(F, C)
(D, E)
(B, C)
(C, D)
(A, F)
(D, F)

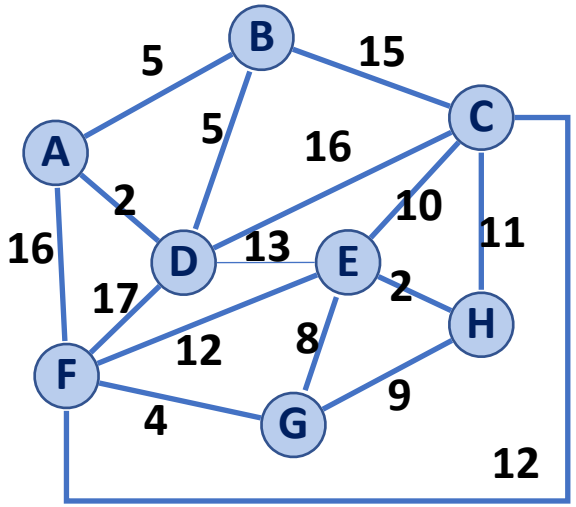

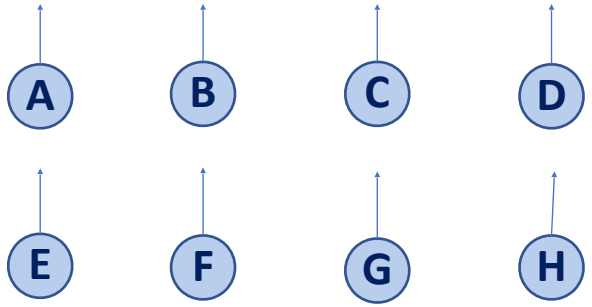

1) Build a **priority queue** on edges

A minheap

or

A sorted array

2) Build a **disjoint set** on vertices

All vertices start as their own set

3) Loop through min edges

If edge connects two disjoint sets

Union sets and record edge in MST


4) Stop when:


N-1 edges recorded

Only a single disjoint set remains

Kruskal's Algorithm

(A, D)
(E, H)
(F, G)
(A, B)
(B, D)
(G, E)
(G, H)
(E, C)
(C, H)
(E, F)
(F, C)
(D, E)
(B, C)
(C, D)
(A, F)
(D, F)

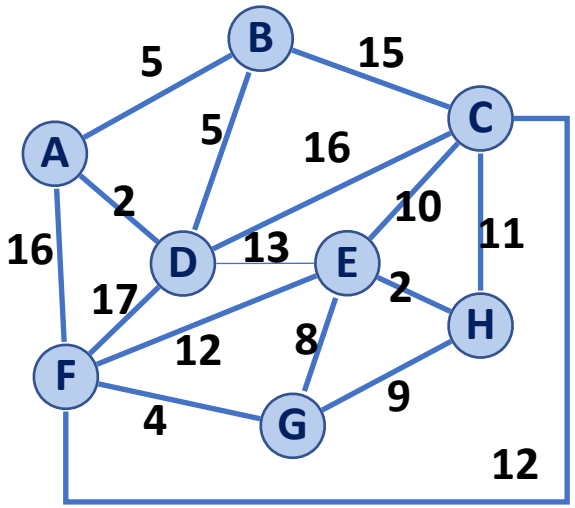

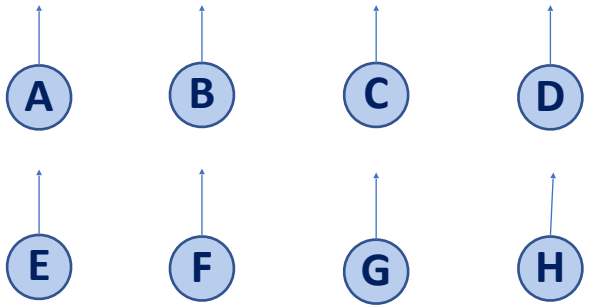


```
1   KruskalMST(G):
2     DisjointSets forest
3     foreach (Vertex v : G.vertices()):
4       forest.makeSet(v)
5
6     PriorityQueue Q     // min edge weight
7     Q.buildFromGraph(G.edges())
8
9     Graph T = (V, {})
10
11    while |T.edges()| < n-1:
12      Vertex (u, v) = Q.removeMin()
13      if forest.find(u) != forest.find(v):
14         T.addEdge(u, v)
15         forest.union( forest.find(u),
16                       forest.find(v) )
17
18    return T
19
```

Kruskal's Algorithm

```
 1  KruskalMST(G):
 2    DisjointSets forest
 3    foreach (Vertex v : G.vertices()):
 4      forest.makeSet(v)
 5
 6    PriorityQueue Q     // min edge weight
 7    Q.buildFromGraph(G.edges())
 8
 9    Graph T = (V, {})
10
11    while |T.edges()| < n-1:
12      Vertex (u, v) = Q.removeMin()
13      if forest.find(u) != forest.find(v):
14         T.addEdge(u, v)
15         forest.union( forest.find(u),
16                       forest.find(v) )
17
18    return T
19
```

$|V| = n, |E| = m$

What is the Big O?

Kruskal's Algorithm

```
1  KruskalMST(G):
2    DisjointSets forest
3    foreach (Vertex v : G.vertices()):
4      forest.makeSet(v)
5
6    PriorityQueue Q     // min edge weight
7    Q.buildFromGraph(G.edges())
8
9    Graph T = (V, {})
10
11   while |T.edges()| < n-1:
12     Vertex (u, v) = Q.removeMin()
13     if forest.find(u) != forest.find(v):
14        T.addEdge(u, v)
15        forest.union( forest.find(u),
16                      forest.find(v) )
17
18   return T
19
```

$|V| = n, |E| = m$

What is the Big O?

2 — 4: O(n)

6 — 7: Heap: O(m)
Sorted List: O(m log m)

11: m x <12-17>

12—17: Heap: O(log m)
Sorted List: O(1)

Disjoint set we treat as O(1) b/c path compression w/ smart union

Kruskal's Algorithm

Priority Queue:	Heap	Sorted Array
Building :7		
Each removeMin :12		

```
1  KruskalMST(G):
2    DisjointSets forest
3    foreach (Vertex v : G.vertices()):
4      forest.makeSet(v)
5
6    PriorityQueue Q     // min edge weight
7    Q.buildFromGraph(G.edges())
8
9    Graph T = (V, {})
10
11   while |T.edges()| < n-1:
12     Vertex (u, v) = Q.removeMin()
13     if forest.find(u) != forest.find(v):
14        T.addEdge(u, v)
15        forest.union( forest.find(u),
16                      forest.find(v) )
17
18   return T
19
```

Kruskal's Algorithm

Priority Queue:	Heap	Sorted Array
Building :7	O(m)	O(m log m)
Each removeMin :12	O(m log m)	O(m)

Both result in m + m log m

Why is heap good?

If edge weights can change!

```
 1  KruskalMST(G):
 2    DisjointSets forest
 3    foreach (Vertex v : G.vertices()):
 4      forest.makeSet(v)
 5
 6    PriorityQueue Q     // min edge weight
 7    Q.buildFromGraph(G.edges())
 8
 9    Graph T = (V, {})
10
11    while |T.edges()| < n-1:
12      Vertex (u, v) = Q.removeMin()
13      if forest.find(u) != forest.find(v):
14         T.addEdge(u, v)
15         forest.union( forest.find(u),
16                       forest.find(v) )
17
18    return T
19
```

Why is sorted array good?

Sorted array not destroyed and can be useful in other algorithms!

Kruskal's Algorithm



Priority Queue:	Total Running Time
Heap	
Sorted Array	

```
 1  KruskalMST(G):
 2    DisjointSets forest
 3    foreach (Vertex v : G.vertices()):
 4      forest.makeSet(v)
 5
 6    PriorityQueue Q     // min edge weight
 7    Q.buildFromGraph(G.edges())
 8
 9    Graph T = (V, {})
10
11    while |T.edges()| < n-1:
12      Vertex (u, v) = Q.removeMin()
13      if forest.find(u) != forest.find(v):
14         T.addEdge(u, v)
15         forest.union( forest.find(u),
16                       forest.find(v) )
17
18    return T
19
```

Kruskal's Algorithm



Priority Queue:	Total Running Time
Heap	O(n)+O(m) + O(m log m)
Sorted Array	O(n) + O(m log m) + O(m)

```
1  KruskalMST(G):
2    DisjointSets forest
3    foreach (Vertex v : G.vertices()):
4      forest.makeSet(v)
5
6    PriorityQueue Q     // min edge weight
7    Q.buildFromGraph(G.edges())
8
9    Graph T = (V, {})
10
11   while |T.edges()| < n-1:
12     Vertex (u, v) = Q.removeMin()
13     if forest.find(u) != forest.find(v):
14        T.addEdge(u, v)
15        forest.union( forest.find(u),
16                      forest.find(v) )
17
18   return T
19
```

Neat trick: O(log m) = O(log n)

Bounds of n & m relationship?

$$n - 1 \leq m \leq n^2$$

Connected graph *Complete graph*