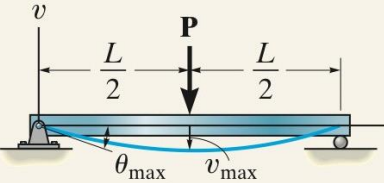
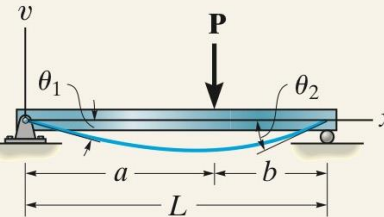
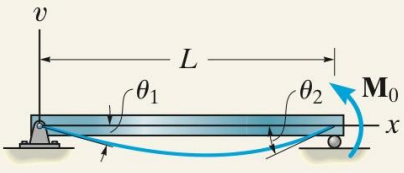
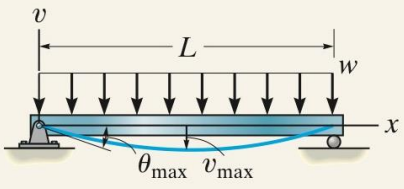


Simply Supported Beam Slopes and Deflections

Beam	Slope	Deflection	Elastic Curve
	$\theta_{\max} = \frac{-PL^2}{16EI}$	$v_{\max} = \frac{-PL^3}{48EI}$	$v = \frac{-Px}{48EI} (3L^2 - 4x^2)$ $0 \leq x \leq L/2$
	$\theta_1 = \frac{-Pab(L + b)}{6EIL}$ $\theta_2 = \frac{Pab(L + a)}{6EIL}$	$v \Big _{x=a} = \frac{-Pba}{6EIL} (L^2 - b^2 - a^2)$	$v = \frac{-Pbx}{6EIL} (L^2 - b^2 - x^2)$ $0 \leq x \leq a$

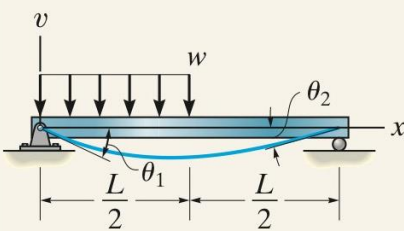
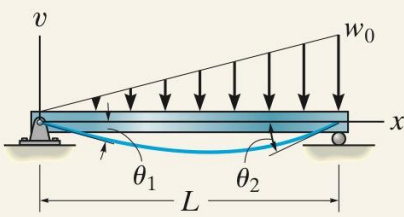
Copyright ©2014 Pearson Education, All Rights Reserved

Simply Supported Beam Slopes and Deflections

Beam	Slope	Deflection	Elastic Curve
	$\theta_1 = \frac{-M_0L}{6EI}$ $\theta_2 = \frac{M_0L}{3EI}$	$v_{\max} = \frac{-M_0L^2}{9\sqrt{3}EI}$ <p>at $x = 0.5774L$</p>	$v = \frac{-M_0x}{6EI} (L^2 - x^2)$
	$\theta_{\max} = \frac{-wL^3}{24EI}$	$v_{\max} = \frac{-5wL^4}{384EI}$	$v = \frac{-wx}{24EI} (x^3 - 2Lx^2 + L^3)$

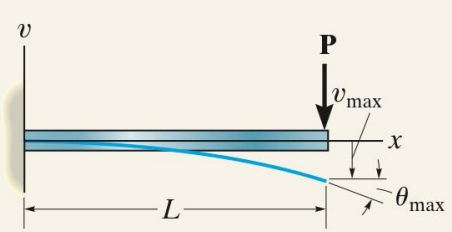
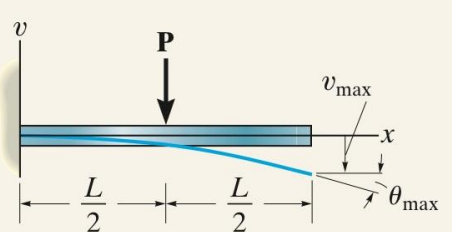
Copyright ©2014 Pearson Education, All Rights Reserved

Simply Supported Beam Slopes and Deflections

Beam	Slope	Deflection	Elastic Curve
	$\theta_1 = \frac{-3wL^3}{128EI}$ $\theta_2 = \frac{7wL^3}{384EI}$	$v \Big _{x=L/2} = \frac{-5wL^4}{768EI}$ $v_{\max} = -0.006563 \frac{wL^4}{EI}$ <p style="text-align: center;">at $x = 0.4598L$</p>	$v = \frac{-wx}{384EI} (16x^3 - 24Lx^2 + 9L^3)$ $0 \leq x \leq L/2$ $v = \frac{-wL}{384EI} (8x^3 - 24Lx^2 + 17L^2x - L^3)$ $L/2 \leq x < L$
	$\theta_1 = \frac{-7w_0L^3}{360EI}$ $\theta_2 = \frac{w_0L^3}{45EI}$	$v_{\max} = -0.00652 \frac{w_0L^4}{EI}$ <p style="text-align: center;">at $x = 0.5193L$</p>	$v = \frac{-w_0x}{360EI} (3x^4 - 10L^2x^2 + 7L^4)$

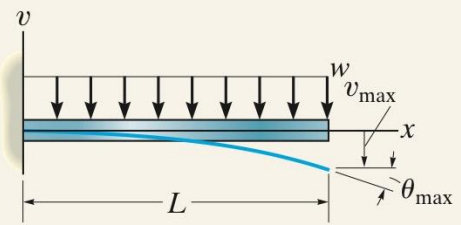
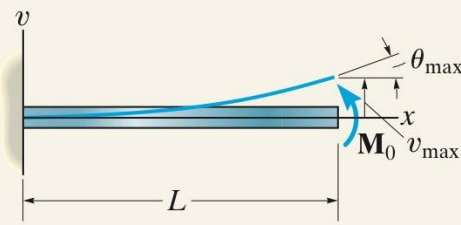
Copyright ©2014 Pearson Education, All Rights Reserved

Cantilevered Beam Slopes and Deflections

Beam	Slope	Deflection	Elastic Curve
	$\theta_{\max} = \frac{-PL^2}{2EI}$	$v_{\max} = \frac{-PL^3}{3EI}$	$v = \frac{-Px^2}{6EI} (3L - x)$
	$\theta_{\max} = \frac{-PL^2}{8EI}$	$v_{\max} = \frac{-5PL^3}{48EI}$	$v = \frac{-Px^2}{12EI} (3L - 2x) \quad 0 \leq x \leq L/2$ $v = \frac{-PL^2}{48EI} (6x - L) \quad L/2 \leq x \leq L$

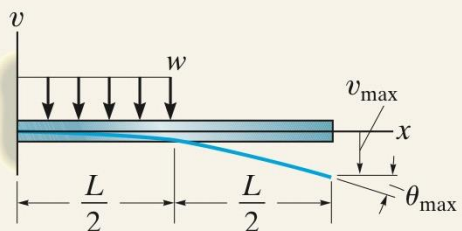
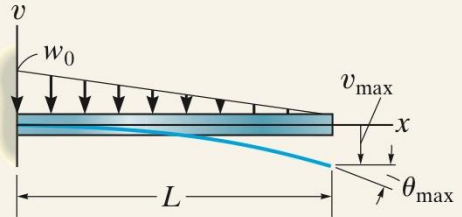
Copyright ©2014 Pearson Education, All Rights Reserved

Cantilevered Beam Slopes and Deflections

Beam	Slope	Deflection	Elastic Curve
	$\theta_{\max} = \frac{-wL^3}{6EI}$	$v_{\max} = \frac{-wL^4}{8EI}$	$v = \frac{-wx^2}{24EI} (x^2 - 4Lx + 6L^2)$
	$\theta_{\max} = \frac{M_0L}{EI}$	$v_{\max} = \frac{M_0L^2}{2EI}$	$v = \frac{M_0x^2}{2EI}$

Copyright ©2014 Pearson Education, All Rights Reserved

Cantilevered Beam Slopes and Deflections

Beam	Slope	Deflection	Elastic Curve
	$\theta_{\max} = \frac{-wL^3}{48EI}$	$v_{\max} = \frac{-7wL^4}{384EI}$	$v = \frac{-wx^2}{24EI} \left(x^2 - 2Lx + \frac{3}{2}L^2 \right) \quad 0 \leq x \leq L/2$ $v = \frac{-wL^3}{384EI} (8x - L) \quad L/2 \leq x \leq L$
	$\theta_{\max} = \frac{-w_0L^3}{24EI}$	$v_{\max} = \frac{-w_0L^4}{30EI}$	$v = \frac{-w_0x^2}{120EIL} (10L^3 - 10L^2x + 5Lx^2 - x^3)$

Copyright ©2014 Pearson Education, All Rights Reserved